

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Helical-scan compressed digital video cassette system using 6,35 mm magnetic tape – Format D-7 –

Part 1: VTR specifications

Système de magnétoscope numérique à cassette à balayage hélicoïdal à signal compressé utilisant une bande magnétique de 6,35 mm – Format D-7 –

Partie 1: Spécifications VTR

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2005 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Helical-scan compressed digital video cassette system using 6,35 mm magnetic tape – Format D-7 –
Part 1: VTR specifications**

**Système de magnétoscope numérique à cassette à balayage hélicoïdal à signal compressé utilisant une bande magnétique de 6,35 mm – Format D-7 –
Partie 1: Spécifications VTR**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

XD

ICS 33.160.40

ISBN 978-2-83220-317-0

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	6
1 Scope.....	8
2 Normative references.....	8
3 Abbreviations and acronyms	8
4 Environment and test conditions	9
4.1 Environment	9
4.2 Reference tape	10
4.3 Calibration tapes	10
5 Tape.....	10
5.1 Base.....	10
5.2 Width	10
5.3 Width fluctuation.....	10
5.4 Reference edge straightness	10
5.5 Tape thickness	11
5.6 Transmissivity	11
5.7 Offset yield strength.....	11
5.8 Magnetic coating	11
5.9 Coating coercivity	11
6 Helical recordings	11
6.1 Tape speed	11
6.2 Sectors.....	11
6.3 Record locations and dimensions.....	11
6.4 Helical track record tolerance zones	12
6.5 Relative positions of recorded information.....	12
6.6 Gap azimuth	22
7 Programme track data	26
7.1 General	26
7.2 Insert and track information (ITI) sector	41
7.3 Audio sector	51
7.4 Video sector	56
7.5 Subcode sector.....	60
7.6 Edit gap.....	63
8 Audio processing	64
8.1 General	64
8.2 Encoding mode.....	64
8.3 Audio shuffling.....	65
8.4 Audio auxiliary data (AAUX).....	66
8.5 Error correction code addition	69
9 Video processing	71
9.1 General	71
9.2 Compressed macro block and data-sync block.....	71
9.3 Video auxiliary data (VAUX).....	72
9.4 Error correction code addition	76

10 Subcode processing	77
10.1 General	77
10.2 Subcode data	77
10.3 Error correction code addition	80
11 Longitudinal tracks	81
11.1 Control track	81
11.2 Cue track	82
Annex A (normative) Tape tension	83
Annex B (normative) Track pattern during insert editing	84
Annex C (normative) Cross-tape track measurement technique	86
Annex D (normative) Frequency characteristics of F_0 track	89
Annex E (informative) Relationship between tape length and recording time	90
Annex F (informative) Block diagram of D-7 recorder	91
Bibliography	92
Figure 1 – Locations and dimensions of recorded tracks of 25 Mb/s format	13
Figure 2 – Locations and dimensions of recorded tracks of 50 Mb/s format	14
Figure 3 – Location of cue and control track record	15
Figure 4 – Locations and dimensions of tolerance zones of helical track record of 25 Mb/s format	20
Figure 5 – Locations and dimensions of tolerance zones of helical track record of 50 Mb/s format	21
Figure 6 – A possible scanner configuration and tape wrap of 25 Mb/s format	24
Figure 7 – A possible scanner configuration and tape wrap of 50 Mb/s format	25
Figure 8 – Possible recording system configuration with digital interface port (informative)	27
Figure 9 – Sector arrangement on helical track	27
Figure 10 – Frames and tracks (525/60 system of 25 Mb/s format)	28
Figure 11 – Frames and tracks (625/50 system of 25 Mb/s format)	28
Figure 12 – A frame and tracks (525/60 system of 50 Mb/s format)	29
Figure 13 – A frame and tracks (625/50 system of 50 Mb/s format)	29
Figure 14 – Frequency characteristics of tracks	34
Figure 15 – Modulation for audio sector	36
Figure 16 – Modulation for video sector	37
Figure 17 – Modulation for subcode sector	38
Figure 18 – Possible block diagram for signal processing	39
Figure 19 – Bit stream before interleaved NRZI modulation	40
Figure 20 – Pre-coding	40
Figure 21 – Structure of ITI sector	42
Figure 22 – Structure of sync block of TIA	48
Figure 23 – Structure of audio sector	51
Figure 24 – Structure of sync blocks in audio sector	52
Figure 25 – Structure of video sector	57

Figure 26 – Structure of sync blocks in video sector	58
Figure 27 – Structure of subcode sector	61
Figure 28 – Structure of sync blocks in subcode sector.....	62
Figure 29 – Sample to audio data bytes conversion	65
Figure 30 – Arrangement of AAUX packs in audio auxiliary data	66
Figure 31 – Data and inner parity of a data sync block	70
Figure 32 – Data and outer parity of a data sync block for audio sector	71
Figure 33 – Relation between the compressed macro block number and the data-sync block	72
Figure 34 – Arrangement.....	73
Figure 35 – Data and outer parity of a data sync block for video sector	77
Figure 36 – Arrangement of subcode data	78
Figure 37 – Bit assignment for subcode data and parity	81
Figure 38 – Recorded control code waveform timing (525/60 system)	82
Figure 39 – Recorded control code waveform timing (625/50 system)	82
Figure B.1 – Typical track pattern during insert editing for 25 Mb/s format.....	84
Figure B.2 – Typical track pattern during insert editing for 50 Mb/s format.....	85
Figure C.1 – Correction factors (actual tape speed, tension).....	87
Figure C.2 – Track location error plot for 25 Mb/s format (example).....	88
Figure C.3 – Track location error plot for 50 Mb/s format (example).....	88
Figure C.4 – Cross-tape measurement technique	88
Figure D.1 – Frequency characteristics of F_0 track	89
Figure F.1 – Block diagram of D-7 recorder	91
Table 1 – Record locations and dimensions (525/60 system of 25 Mb/s format)	16
Table 2 – Record locations and dimensions (625/50 system of 25 Mb/s format)	17
Table 3 – Record locations and dimensions (525/60 system of 50 Mb/s format)	18
Table 4 – Record locations and dimensions (625/50 system of 50 Mb/s format)	19
Table 5 – Parameters for a possible scanner design of 25 Mb/s format.....	23
Table 6 – Parameters for a possible scanner design of 50 Mb/s format.....	23
Table 7 – Frames and servo information (525/60 system of 25 Mb/s format)	30
Table 8 – Frames and servo information (625/50 system of 25 Mb/s format)	31
Table 9 – A frame and servo information (525/60 system of 50 Mb/s format).....	32
Table 10 – A frame and servo information (625/50 system of 50 Mb/s format).....	33
Table 11 – Bit stream of ITI preamble for servo information F_0	42
Table 12 – Bit stream of ITI preamble for servo information F_1	43
Table 13 – Bit stream of ITI preamble for servo information F_2	44
Table 14 – Bit stream of SSA for servo information F_0	45
Table 15 – Bit stream of SSA for servo information F_1	46
Table 16 – Bit stream of SSA for servo information F_2	47
Table 17 – Application ID of track information.....	48
Table 18 – Pilot frame	48
Table 19 – Bit stream of TIA for servo information F_0	49
Table 20 – Bit stream of TIA for servo information F_1	49

Table 21 – Bit stream of TIA for servo information F_2	49
Table 22 – Bit stream of ITI post-amble for servo information F_0	50
Table 23 – Bit stream of ITI post-amble for servo information F_1	50
Table 24 – Bit stream of ITI post-amble for servo information F_2	50
Table 25 – ID0 in audio sector	53
Table 26 – Audio application ID	53
Table 27 – Track pair number for 25 Mb/s format	53
Table 28 – Track pair number for 50 Mb/s format	54
Table 29 – Bit assignment of ID codewords	55
Table 30 – ID data in video sector	59
Table 31 – Video application ID	60
Table 32 – ID data in subcode sector	62
Table 33 – Subcode application ID	63
Table 34 – AAUX data	67
Table 35 – Mapping of AAUX source pack	67
Table 36 – Mapping of AAUX source control pack	68
Table 37 – VAUX data	74
Table 38 – Mapping of VAUX source pack	74
Table 39 – Mapping of VAUX source control pack	75
Table 40 – Mapping of subcode pack	78
Table 41 – Mapping of time code pack	79
Table 42 – Mapping of a binary group pack	80
Table C.1 – Nomenclature and calculation of track location error	87
Table E.1 – Tape length and recording time	90

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

INTERNATIONAL ELECTROTECHNICAL COMMISSION

HELICAL-SCAN COMPRESSED DIGITAL VIDEO CASSETTE SYSTEM USING 6,35 mm MAGNETIC TAPE – FORMAT D-7 –

Part 1: VTR specifications

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62071-1 has been prepared by technical area 6: Higher data rate storage media, data structures and equipment of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This bilingual version (2012-11) corresponds to the monolingual English version, published in 2005-10.

The text of this standard is based on the following documents:

CDV	Report on voting
100/900/CDV	100/984/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IEC 62071 consists of the following parts, under the general title *Helical-scan compressed digital video cassette system using 6,35 mm magnetic tape – Format D-7*:

Part 1: VTR specifications

Part 2: Compression format

Part 3: Data stream format

This part 1 describes the VTR specifications which are tape, magnetization, helical recording, modulation method and basic system data for video compressed data.

Part 2 describes the specifications for encoding process and data format for 525i and 625i systems.

Part 3 describes the specifications for transmission of DV-based compressed video and audio data stream over 270 Mb/s and 360 Mb/s serial digital interface.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

HELICAL-SCAN COMPRESSED DIGITAL VIDEO CASSETTE SYSTEM USING 6,35 mm MAGNETIC TAPE – FORMAT D-7 –

Part 1: VTR specifications

1 Scope

This part of IEC 62071 specifies the content, format and recording method of the data blocks containing video, audio, and associated data which form the helical records on 6,35 mm tape contained in cassettes as specified in SMPTE 307M.

In addition, this standard specifies the content, format, and recording method for longitudinal cue and control tracks.

One video channel and two independent audio channels are recorded in the digital format for 25 Mb/s VTRs and one video channel and four independent audio channels for 50 Mb/s VTRs. Each of these channels is designed to be capable of independent editing.

The video channel records and reproduces a component television signal in the 525-line system with a frame frequency of 29,97 Hz (hereinafter referred to as the 525/60 system) and the 625-line system with a frame frequency of 25,00 Hz (hereinafter referred to as the 625/50 system).

Prior to recording, the digital signal is be compressed to a DV-based 25 Mb/s bit stream with 4:1:1 sampling or a DV-based 50 Mb/s bit stream with 4:2:2 sampling.

The standard includes the process required to decode the DV-based 25 Mb/s bit stream and 50 Mb/s bit stream into output video, audio, and data.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

AES3:2003, *AES Recommended Practice for Digital Audio Engineering – Serial transmission format for two-channel linearly represented digital audio data*

SMPTE 12M: 1999, *Television, Audio and Film – Time and Control Code*

SMPTE 259M: 1997, *Television – 10-Bit 4:2:2 Component and 4fsc NTSC Composite Digital Signals – Serial Digital Interface*

3 Abbreviations and acronyms

AAUX	Audio auxiliary data
AP1	Audio application ID
AP2	Video application ID
AP3	Subcode application ID
APT	Track application ID

Arb	Arbitrary
AS	AAUX source pack
ASC	AAUX source control pack
B/W	Black and white flag
CGMS	Copy generation management system
DBN	DIF block number
DCT	Discrete cosine transform
DIF	Digital interface
DSF	DIF sequence flag
ECC	Error correction code
EFC	Emphasis channel flag
EOB	End of block
ID	Identification
IDP	ID parity
ITI	Insert and track information
LF	Locked mode flag
PF	Pilot frame
QNO	Quantization number
QU	Quantization
Res	Reserved for future use
SMP	Sampling frequency
SSA	Start sync area
SSYB	Subcode sync block number
STA	Status of the compressed macro block
Syb	Sync block number
TF	Transmitting flag
TIA	Track information area
Trp	Track pair number
VAUX	Video auxiliary data
VLC	Variable length coding
VS	VAUX source pack
VSC	VAUX source control pack
VSM	Vibrating sample magnetometer

4 Environment and test conditions

4.1 Environment

Tests and measurements made on the system to check the requirements of this standard shall be carried out under the following conditions:

- Temperature: $20\text{ °C} \pm 1\text{ °C}$
- Relative humidity: $(50 \pm 2)\%$
- Barometric pressure: from 86 kPa to 106 kPa
- Tape conditioning: not less than 24 h

- Centre tape tension: 0,09 N $\pm$ 0,02 N (see Annex A)

4.2 Reference tape

A blank tape for reference recordings shall be available from the format holder or approved source.

4.3 Calibration tapes

The calibration tapes meeting the requirements of 4.3.1, 4.3.2, and Clause 5 shall be made available from manufacturers who produce digital television tape recorders and players in accordance with this standard.

4.3.1 Record locations and dimensions

Calibration tape shall be manufactured to tolerances shown in Table 1 or Table 2 for 25 Mb/s format or Table 3 or Table 4 for 50 Mb/s format but with these tolerances reduced by 50 %.

4.3.2 Calibration signals

Two sets of signals shall be recorded on the calibration tape:

- a) – Video: 100 / 0 / 100 / 0 colour bars
 - Audio: 1 kHz tone at 20 dB below full scale on each audio channel
 - Cue: 1 kHz and 6 kHz tone at the analogue recording reference level;
- b) A signal of constant recorded frequency (i.e. the Nyquist frequency) for the purpose of mechanical alignment. The recording level shall conform to 7.1.4.3

5 Tape

5.1 Base

The base material shall be polyester or equivalent.

5.2 Width

The tape width shall be 6,350 mm $\pm$ 0,005 mm.

The tape, covered with glass, is measured without tension at a minimum of five different positions along the tape using a calibrated comparator having an accuracy of 0,001 mm (1 μ m). The tape width shall be within the aforementioned specification at any measuring position.

5.3 Width fluctuation

Tape width fluctuation shall not exceed 5 μ m peak-to-peak. Measurement of tape width fluctuation shall be taken over a tape length of 900 mm. The tape width fluctuation shall be within the aforementioned specification at each of ten equally spaced points in the 900 mm span.

5.4 Reference edge straightness

The reference edge straightness maximum deviation is 6 μ m peak-to-peak. Edge straightness fluctuation is measured at the edge of a moving tape guided by three guides having contact on the same edge and having a distance of 85 mm from the first to second guide and 85 mm from the second to third guide. Edge measurements are averaged over a 10 m length and are made 5 mm from the midpoint between the first and second guide towards the first guide.

5.5 Tape thickness

The total tape thickness shall be $8,8^{+0}_{-0,8}$ μm and $6,7^{+0}_{-0,4}$ μm .

NOTE Tape of either thickness may be used for 25 Mb/s or 50 Mb/s formats.

5.6 Transmissivity

Transmissivity shall be less than 5 %, measured over the range of wavelengths 800 nm to 1 000 nm.

5.7 Offset yield strength

The offset yield strength shall be greater than 3 N. The force to produce 0,2 % elongation of a 1 000 mm test sample with a pull rate of 10 mm per minute shall be used to confirm the offset yield strength. The line beginning at 0,2 % elongation parallel to the initial tangential slope is drawn and then read at the point of intersection of the line and the stress-strain curve.

5.8 Magnetic coating

The magnetic layer of the tape shall consist of a coating of metal particles or equivalent.

5.9 Coating coercivity

The magnetic coating coercivity shall be a class 2300 (approximately 2300 Oe / 184000 A/m), with an applied field of 10000 Oe / 800000 A/m measured by a VSM.

6 Helical recordings

6.1 Tape speed

The tape speed for the 25 Mb/s format shall be 33,8201 mm/s for the 525/60 system and 33,8539 mm/s for the 625/50 system. The tape speed for the 50 Mb/s format shall be 67,6401 mm/s for the 525/60 system and 67,7077 mm/s for the 625/50 system. The tolerance shall be $\pm 0,2$ % respectively.

6.2 Sectors

Each recorded track contains an ITI sector, an audio sector, a video sector and a subcode sector.

6.3 Record locations and dimensions

Record locations and dimensions for continuous recording of 25 Mb/s format shall be as specified in Figures 1 and 3, and Table 1 (525/60 system) or in Figures 1 and 3, and Table 2 (625/50 system). In recording, sector locations on each helical track shall be contained within the tolerance specified in Figure 1 and Table 1 (525/60 system) or in Figure 1 and Table 2 (625/50 system).

Record location and dimensions for continuous recording of 50 Mb/s format shall be as specified in Figures 2 and 3, and Table 3 (525/60 system) or in Figures 2 and 3, and Table 4 (625/50 system). In recording, sector locations on each helical track shall be contained within the tolerance specified in Figure 2 and Table 3 (525/60 system) or in Figure 2 and Table 4 (625/50 system).

The reference edge of the tape for dimensions specified in this standard shall be the lower edge as shown in Figures 1 and 2. The magnetic coating, with the direction of tape travel as shown in Figures 1 and 2, are on the side facing the observer.

As indicated in Figures 1 and 2, this standard anticipates a zero guard band between recorded tracks, and the nominal record head width shall be equal to the track pitch of 18 μm . The scanner head configuration should be chosen so that the recorded track widths are contained within the limits of 16 μm to 20 μm .

The format requires flying erasure for recording. In insert editing, this standard provides a guard band of $3 \mu\text{m} \pm 1,5 \mu\text{m}$ between the previously recorded track and the inserted track at editing points only. A typical track pattern for insert editing is shown in Figures B.1 and B.2 of Annex B.

6.4 Helical track record tolerance zones

In the case of 25 Mb/s format, the centre of two consecutive tracks starting at the first track in each video frame shall be contained within the pattern of the two tolerance zones established in Figure 4. Each zone is defined by two parallel lines which are inclined at an angle of $9,1784^\circ$ basic with respect to the tape reference edge. The centrelines of each zone shall be spaced apart 18,0 μm basic. The width of zone 1 shall be 3 μm and the width of zone 2 shall be 5 μm . These zones are established to contain track angle errors, track straightness errors, and vertical head offset tolerances (the measuring technique is shown in Annex C).

In the case of 50 Mb/s format, the lower edge of four consecutive tracks starting at the first track in each video frame shall be contained within the pattern of the four tolerance zones established in Figure 5. Each zone is defined by two parallel lines which are inclined at an angle of $9,1784^\circ$ basic with respect to the tape reference edge. The centrelines of each zone shall be spaced apart 18,0 μm basic. The width of zone 2 shall be 3 μm and the width of zone 1, 3 and 4 shall be 5 μm . These zones are established to contain track angle errors, track straightness errors, and vertical head offset tolerance.

6.5 Relative positions of recorded information


6.5.1 Relative positions of longitudinal tracks

Audio, video, control track and cue track with information intended to be time coincident shall be positioned as shown in Figures 1 to 3.

6.5.2 Programme area reference point

The programme area reference point is determined by the intersection of a line parallel to the reference edge of the tape at a distance Y_0 from the reference edge and the centreline of track 0 in each ITI sector (see Figures 1 to 3).

The end of the preamble and beginning of SSA in the ITI sector shall be recorded at the programme area reference point, and the tolerance of dimension X_0 . The locations are shown in Figures 1 to 3; dimensions X_0 and Y_0 are specified in Tables 1 to 4. The relationship between sectors and contents of each sector is specified in Clause 7.

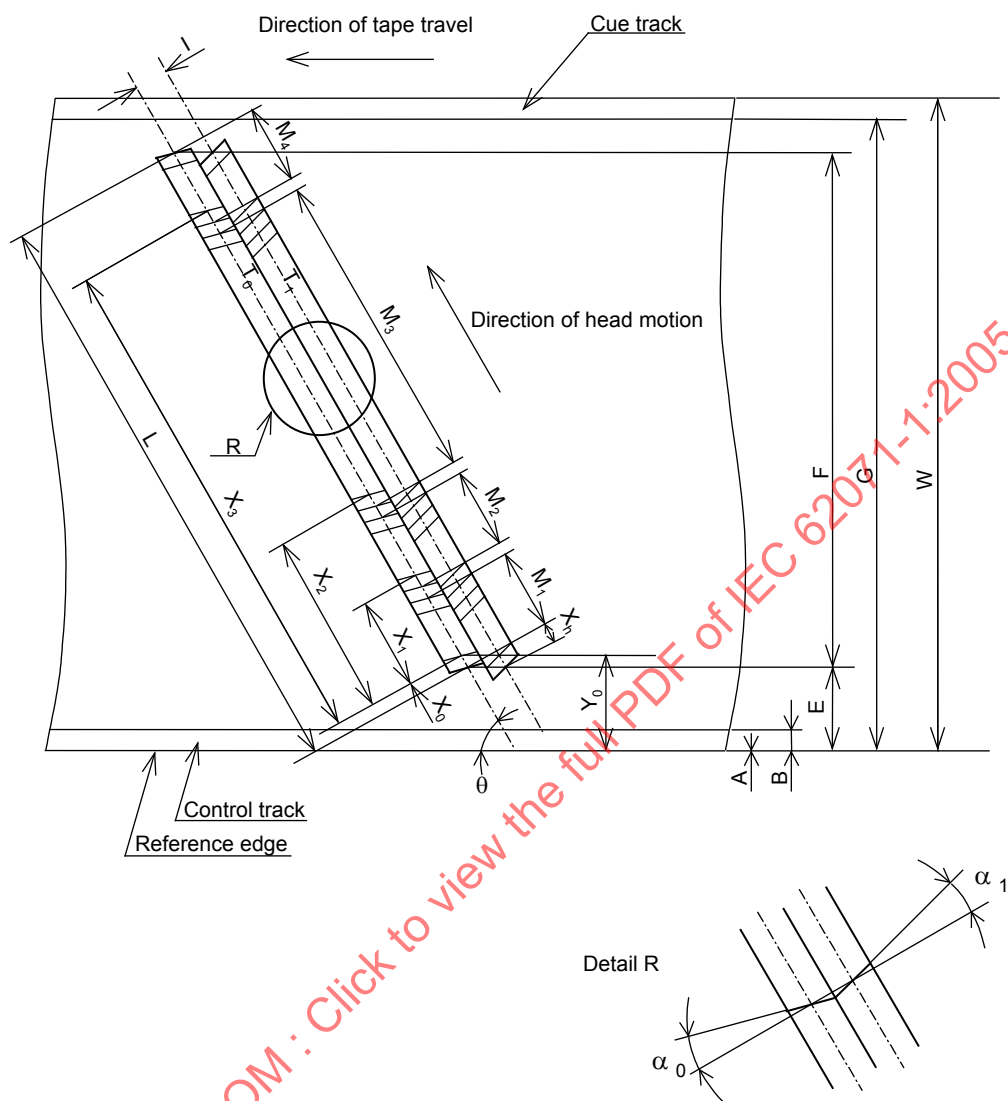

NOTE 1 M_1 is an ITI sector.

NOTE 2 M_2 is an audio sector.


NOTE 3 M_3 is a video sector.

NOTE 4 M_4 is a subcode sector.

NOTE 5 Tracks viewed from magnetic coating side.

NOTE 6 Dimension X_1 to X_3 are determined by the programme reference point as defined in Figure 3.

Figure 1 – Locations and dimensions of recorded tracks of 25 Mb/s format

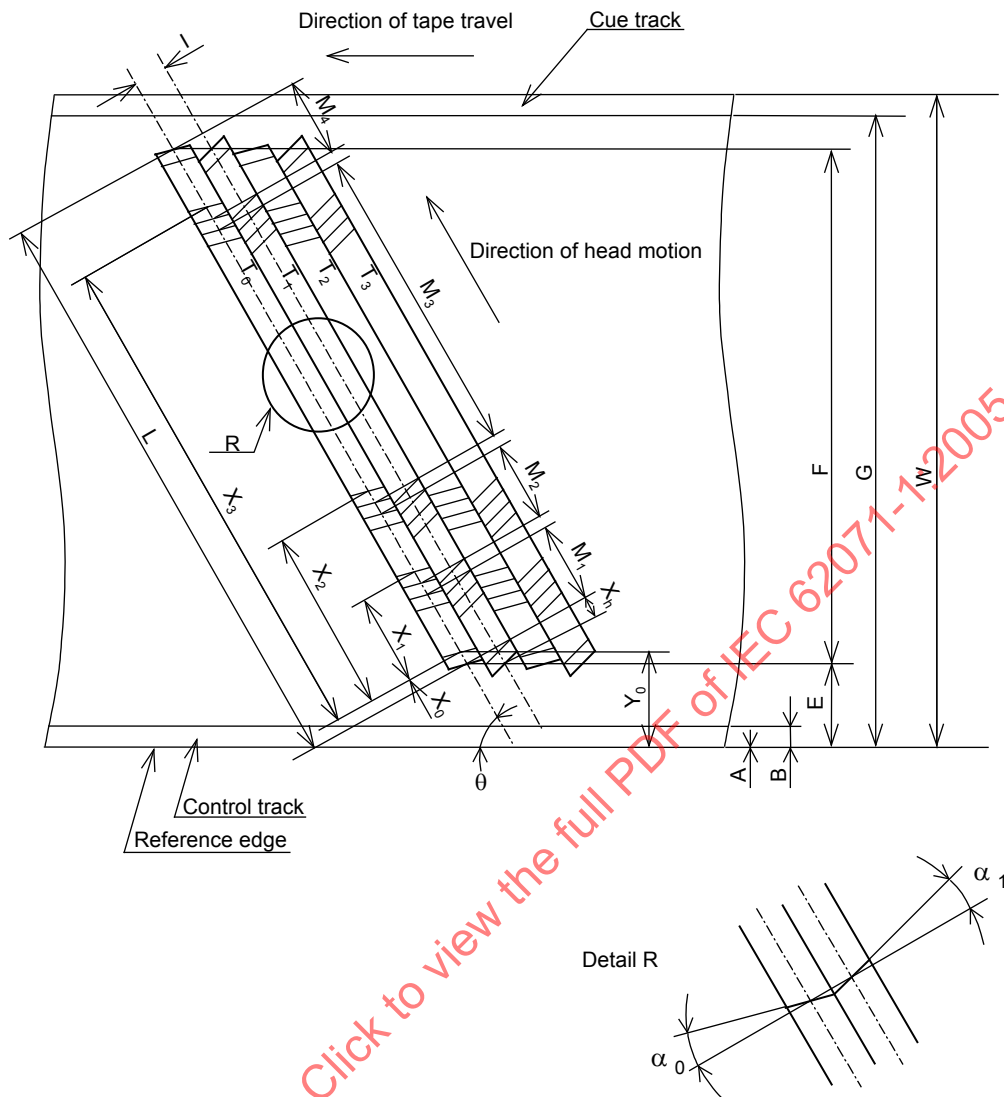

NOTE 1 M_1 is an ITI sector.

NOTE 2 M_2 is an audio sector.




NOTE 3 M_3 is a video sector.

NOTE 4 M_4 is a subcode sector.


NOTE 5 Tracks viewed from magnetic coating side.

NOTE 6 Dimension X_1 to X_3 are determined by the programme reference point as defined in Figure 3.

Figure 2 – Locations and dimensions of recorded tracks of 50 Mb/s format

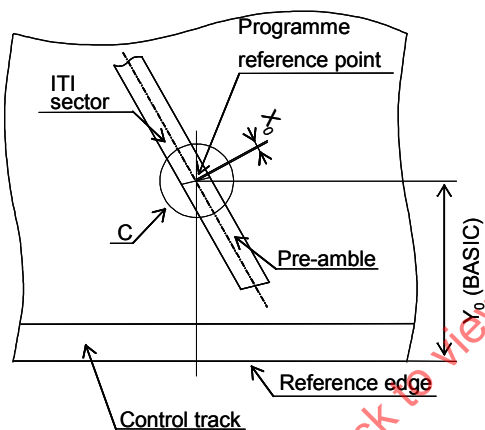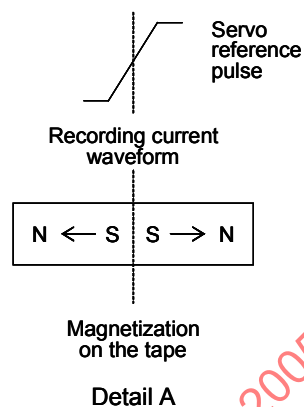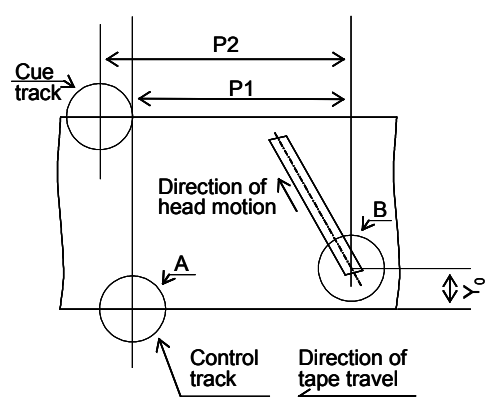

Detail B



Detail C

Figure 3 – Location of cue and control track record

Table 1 – Record locations and dimensions (525/60 system of 25 Mb/s format)

Dimensions in millimetres

Dimensions		Nominal	Tolerance
A	Control track lower edge	0	Basic
B	Control track upper edge	0,400	$\pm 0,050$
E	Programme area lower edge	0,56	Derived
F	Programme area width	5,24	Derived
G	Cue track lower edge	6,000	$\pm 0,050$
I	Helical track pitch	0,018	Ref.
L	Total length of helical track	32,842	Derived
M_1	Length of ITI sector with preamble and post-amble	0,876	Derived
M_2	Length of audio sector with preamble and post-amble	2,810	Derived
M_3	Length of video sector with preamble and post-amble	27,548	Derived
M_4	Length of subcode sector with preamble and post-amble	0,906	Derived
P_1	Control track reference pulse to programme reference point (see Figure 3)	67,500	$\pm 0,030$
P_2	Cue signal, start of code word of cue to programme reference point (see Figure 3)	69,900	$\pm 0,300$
W	Tape width	6,350	$\pm 0,005$
X_0	Location of beginning of SSA in ITI sector	0	$\pm 0,050$
X_1	Location of start of audio data sync blocks	0,809	$\pm 0,050$
X_2	Location of start of video data sync blocks	3,790	$\pm 0,050$
X_3	Location of start of subcode data sync blocks	31,885	$\pm 0,050$
X_h	Head stagger and inline tolerance	0,111	$\pm 0,021$
Y_0	Programme track reference point	0,615	Basic
θ	Track angle	9,178 4	Basic
α_0	Azimuth angle (track 0)	19,97	$\pm 0,150^\circ$
α_1	Azimuth angle (track 1)	20,03	$\pm 0,150^\circ$

NOTE Measurements should be made under the conditions specified in 4.1. The measurements should be corrected to account for actual tape speed (see Figures C.1 and C.2).

Table 2 – Record locations and dimensions (625/50 system of 25 Mb/s format)*Dimensions in millimetres*

Dimensions		Nominal	Tolerance
A	Control track lower edge	0	Basic
B	Control track upper edge	0,400	$\pm 0,050$
E	Programme area lower edge	0,56	Derived
F	Programme area width	5,24	Derived
G	Cue track lower edge	6,000	$\pm 0,050$
I	Helical track pitch	0,018	Ref.
L	Total length of helical track	32,842	Derived
M_1	Length of ITI sector with preamble and post-amble	0,877	Derived
M_2	Length of audio sector with preamble and post-amble	2,813	Derived
M_3	Length of video sector with preamble and post-amble	27,576	Derived
M_4	Length of subcode sector with preamble and post-amble	0,877	Derived
P_1	Control track reference pulse to programme reference point (see Figure 3)	67,500	$\pm 0,030$
P_2	Cue signal, start of code word of cue to programme reference point (see Figure 3)	70,380	$\pm 0,300$
W	Tape width	6,350	$\pm 0,005$
X_0	Location of beginning of SSA in ITI sector	0	$\pm 0,050$
X_1	Location of start of audio data sync blocks	0,810	$\pm 0,050$
X_2	Location of start of video data sync blocks	3,793	$\pm 0,050$
X_3	Location of start of subcode data sync blocks	31,917	$\pm 0,050$
X_h	Head stagger and inline tolerance	0,111	$\pm 0,021$
Y_0	Programme track reference point	0,615	Basic
θ	Track angle	9,178 4°	Basic
α_0	Azimuth angle (track 0)	19,97°	$\pm 0,150^\circ$
α_1	Azimuth angle (track 1)	20,03°	$\pm 0,150^\circ$

NOTE Measurements should be made under the conditions specified in 4.1. The measurements should be corrected to account for actual tape speed (see Figures C.1 and C.2).

Table 3 – Record locations and dimensions (525/60 system of 50 Mb/s format)

Dimensions in millimetres


Dimensions		Nominal	Tolerance
A	Control track lower edge	0	Basic
B	Control track upper edge	0,400	$\pm 0,050$
E	Programme area lower edge	0,56	Derived
F	Programme area width	5,24	Derived
G	Cue track lower edge	6,000	$\pm 0,050$
I	Helical track pitch	0,018	Ref.
L	Total length of helical track	32,842	Derived
M_1	Length of ITI sector with preamble and post-amble	0,876	Derived
M_2	Length of audio sector with preamble and post-amble	2,810	Derived
M_3	Length of video sector with preamble and post-amble	27,548	Derived
M_4	Length of subcode sector with preamble and post-amble	0,906	Derived
P_1	Control track reference pulse to programme reference point (see Figure 3)	67,500	$\pm 0,030$
P_2	Cue signal, start of code word of cue to programme reference point (see Figure 3)	67,500	$\pm 0,300$
W	Tape width	6,350	$\pm 0,005$
X_0	Location of beginning of SSA in ITI sector	0	$\pm 0,050$
X_1	Location of start of audio data sync blocks	0,809	$\pm 0,050$
X_2	Location of start of video data sync blocks	3,790	$\pm 0,050$
X_3	Location of start of subcode data sync blocks	31,885	$\pm 0,050$
X_h	Head stagger and inline tolerance	0,111	$\pm 0,021$
Y_0	Programme track reference point	0,615	Basic
θ	Track angle	9,178 4	Basic
α_0	Azimuth angle (track 0, 2)	19,97	$\pm 0,150^\circ$
α_1	Azimuth angle (track 1, 3)	20,03	$\pm 0,150^\circ$

NOTE Measurements should be made under the conditions specified in 4.1. The measurements should be corrected to account for actual tape speed (see Figures C.1 and C.3).

Table 4 – Record locations and dimensions (625/50 system of 50 Mb/s format)*Dimensions in millimetres*

Dimensions		Nominal	Tolerance
A	Control track lower edge	0	Basic
B	Control track upper edge	0,400	$\pm 0,050$
E	Programme area lower edge	0,56	Derived
F	Programme area width	5,24	Derived
G	Cue track lower edge	6,000	$\pm 0,050$
I	Helical track pitch	0,018	Ref.
L	Total length of helical track	32,842	Derived
M_1	Length of ITI sector with preamble and post-amble	0,877	Derived
M_2	Length of audio sector with preamble and post-amble	2,813	Derived
M_3	Length of video sector with preamble and post-amble	27,576	Derived
M_4	Length of subcode sector with preamble and post-amble	0,877	Derived
P_z	Control track reference pulse to programme reference point (see Figure 3)	67,500	$\pm 0,030$
P_2	Cue signal, start of code word of cue to programme reference point (see Figure 3)	67,500	$\pm 0,300$
W	Tape width	6,350	$\pm 0,005$
X_0	Location of beginning of SSA in ITI sector	0	$\pm 0,050$
X_1	Location of start of audio data sync blocks	0,810	$\pm 0,050$
X_2	Location of start of video data sync blocks	3,793	$\pm 0,050$
X_3	Location of start of subcode data sync blocks	31,917	$\pm 0,050$
X_h	Head stagger and inline tolerance	0,111	$\pm 0,021$
Y_0	Programme track reference point	0,615	Basic
θ	Track angle	9,178 4	Basic
α_0	Azimuth angle (track 0, 2)	19,97	$\pm 0,150^\circ$
α_1	Azimuth angle (track 1, 3)	20,03	$\pm 0,150^\circ$

NOTE Measurements should be made under the conditions specified in 4.1. The measurements should be corrected to account for actual tape speed (see Figures C.1 and C.3).

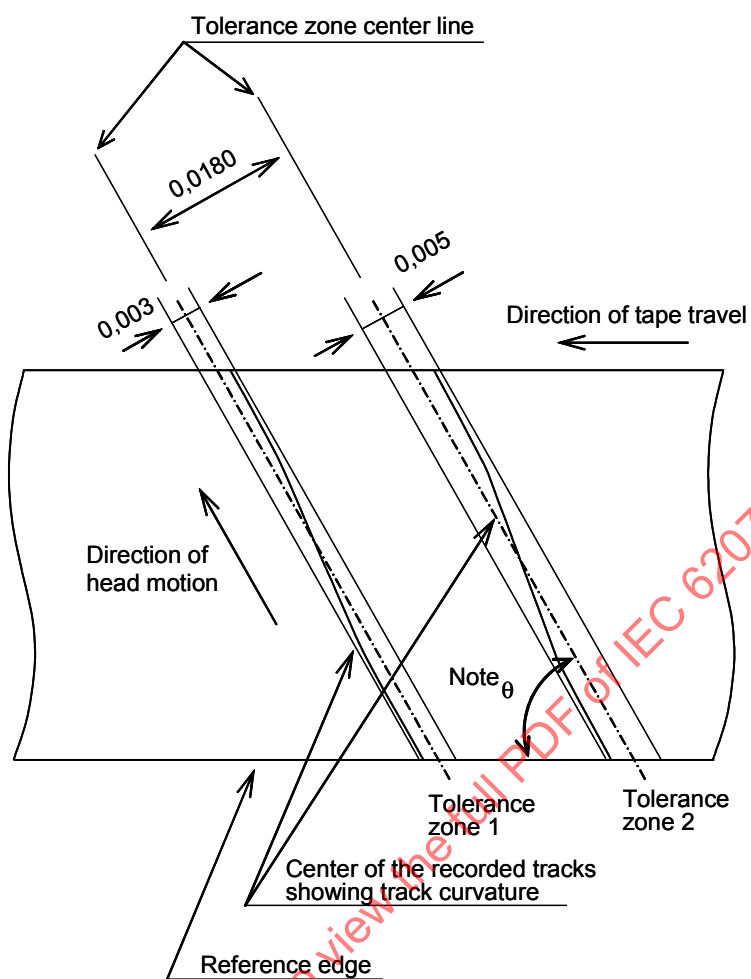

IEC 1861/05

Dimensions in millimetres

NOTE $\theta = 9,178\ 4^\circ$.

Figure 4 – Locations and dimensions of tolerance zones of helical track record of 25 Mb/s format

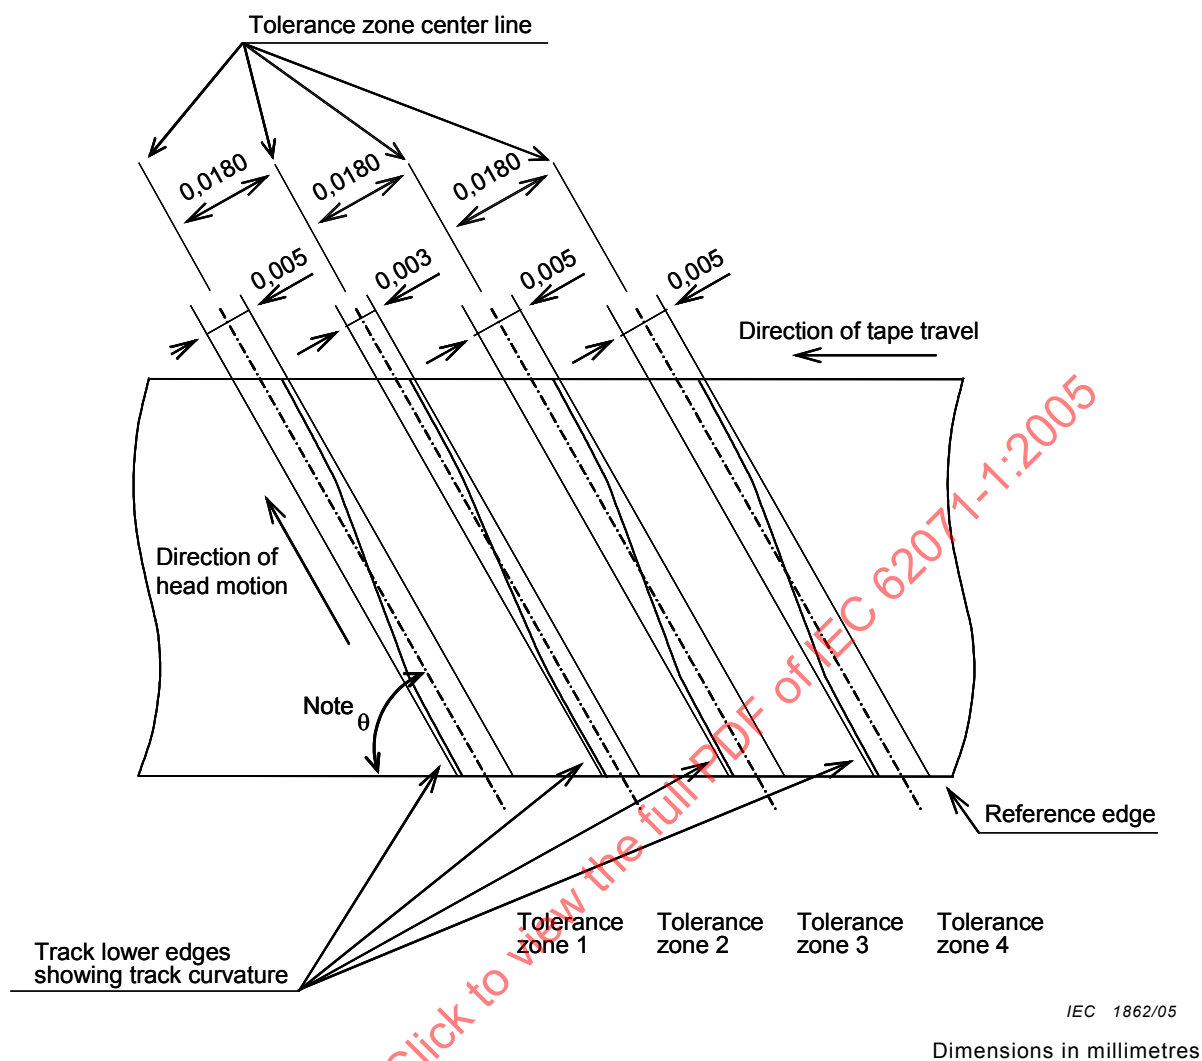


Figure 5 – Locations and dimensions of tolerance zones of helical track record of 50 Mb/s format

6.6 Gap azimuth

6.6.1 Cue and control track

The azimuth angle of the cue and control track head gaps used to produce longitudinal track records shall be perpendicular to these recorded tracks.

6.6.2 Helical track

The azimuth of the head gaps used for the helical track shall be inclined at angles α_0 and α_1 as specified in Tables 1 to 4 with respect to a line perpendicular to the helical track. For 25 Mb/s format, the azimuth of track No.0 for every field shall be oriented in a clockwise direction with respect to a line perpendicular to the helical track direction when viewed from the side of the tape containing the magnetic record. For 50 Mb/s format, the azimuth of tracks No. 0 and No. 2 for every field shall be oriented in a clockwise direction in the same manner.

6.6.3 Transport and scanner

The effective drum diameter, tape tension, helix angle, and tape speed taken together determine the track angle. Different methods of design and/or variations in drum diameter and tape tension can produce equivalent recordings for interchange purposes.

A possible configuration of the transport uses a scanner with an effective diameter of 21,700 mm. Scanner rotation is in the same direction as tape motion during record mode. In 25 Mb/s format, data are recorded by two heads each mounted 180° apart. Figure 6 shows a possible mechanical configuration of the scanner and the relationship between the longitudinal heads and the scanner. Table 5 shows the corresponding mechanical parameters.

In 50 Mb/s format, data are recorded by two pairs of heads each mounted 180° apart. Figure 7 shows a possible mechanical configuration of the scanner and the relationship between the longitudinal heads and the scanner. Table 6 shows the corresponding mechanical parameters.

Other mechanical configurations are allowed provided the same footprint of recorded information is produced on tape.

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

Table 5 – Parameters for a possible scanner design of 25 Mb/s format

Parameters	525/60 system	625/50 system
Scanner rotation speed (rpm)	9 000/1,001	9 000
Number of tracks per rotation	2	
Drum diameter (mm)	21,700	
Centre span tension (N)	0,09	
Helix angle (degrees)	9,150 0	
Effective wrap angle (degrees)	174	
Scanner circumferential speed (m/s)	10,182	10,192
Bit frequency f_b (Hz)	41 850 000	
H_1, H_2 overwrap head entrance (degrees)	5,0	
H_1, H_2 overwrap head exit (degrees)	6,0	
Maximum tip projection (μm)	20	
Record head track width (μm)	18	

Table 6 – Parameters for a possible scanner design of 50 Mb/s format

Parameters	525/60 system	625/50 system
Scanner rotation speed (rpm)	9 000/1,001	9 000
Number of tracks per rotation	4	
Drum diameter (mm)	21,700	
Centre span tension (N)	0,09	
Helix angle (degrees)	9,119 7	
Effective wrap angle (degrees)	174,6	
Scanner circumferential speed (m/s)	10,149	10,159
Bit frequency f_b (Hz)	41 715 000	
H_1, H_3 overwrap head entrance (degrees)	4,7	
H_1, H_3 overwrap head exit (degrees)	5,7	
Maximum tip projection (μm)	20	
Record head track width (μm)	18	

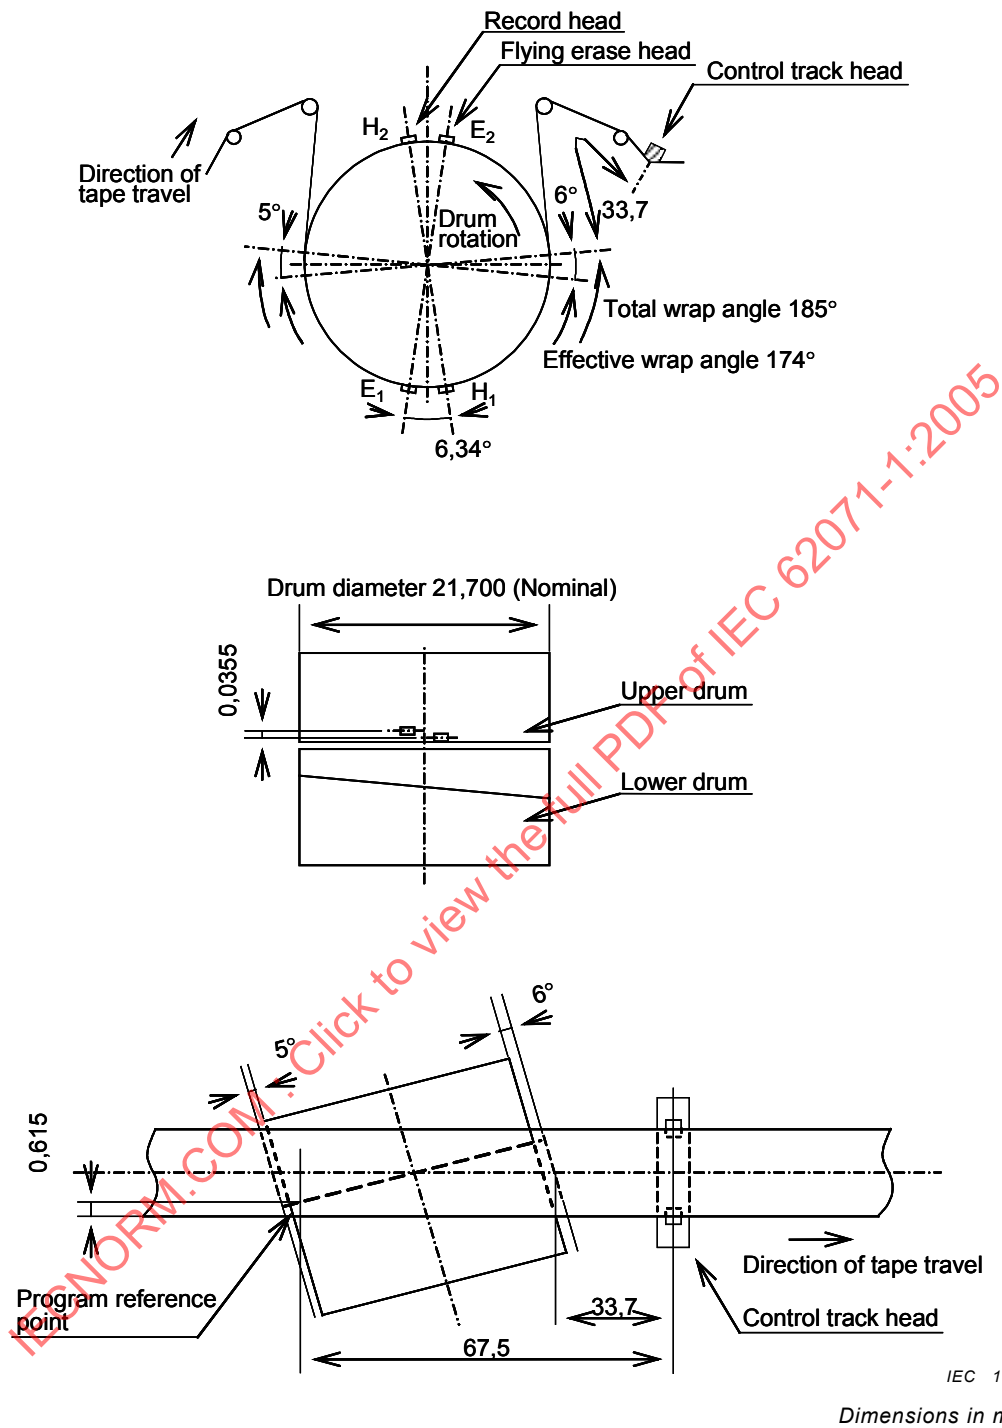


Figure 6 – A possible scanner configuration and tape wrap of 25 Mb/s format

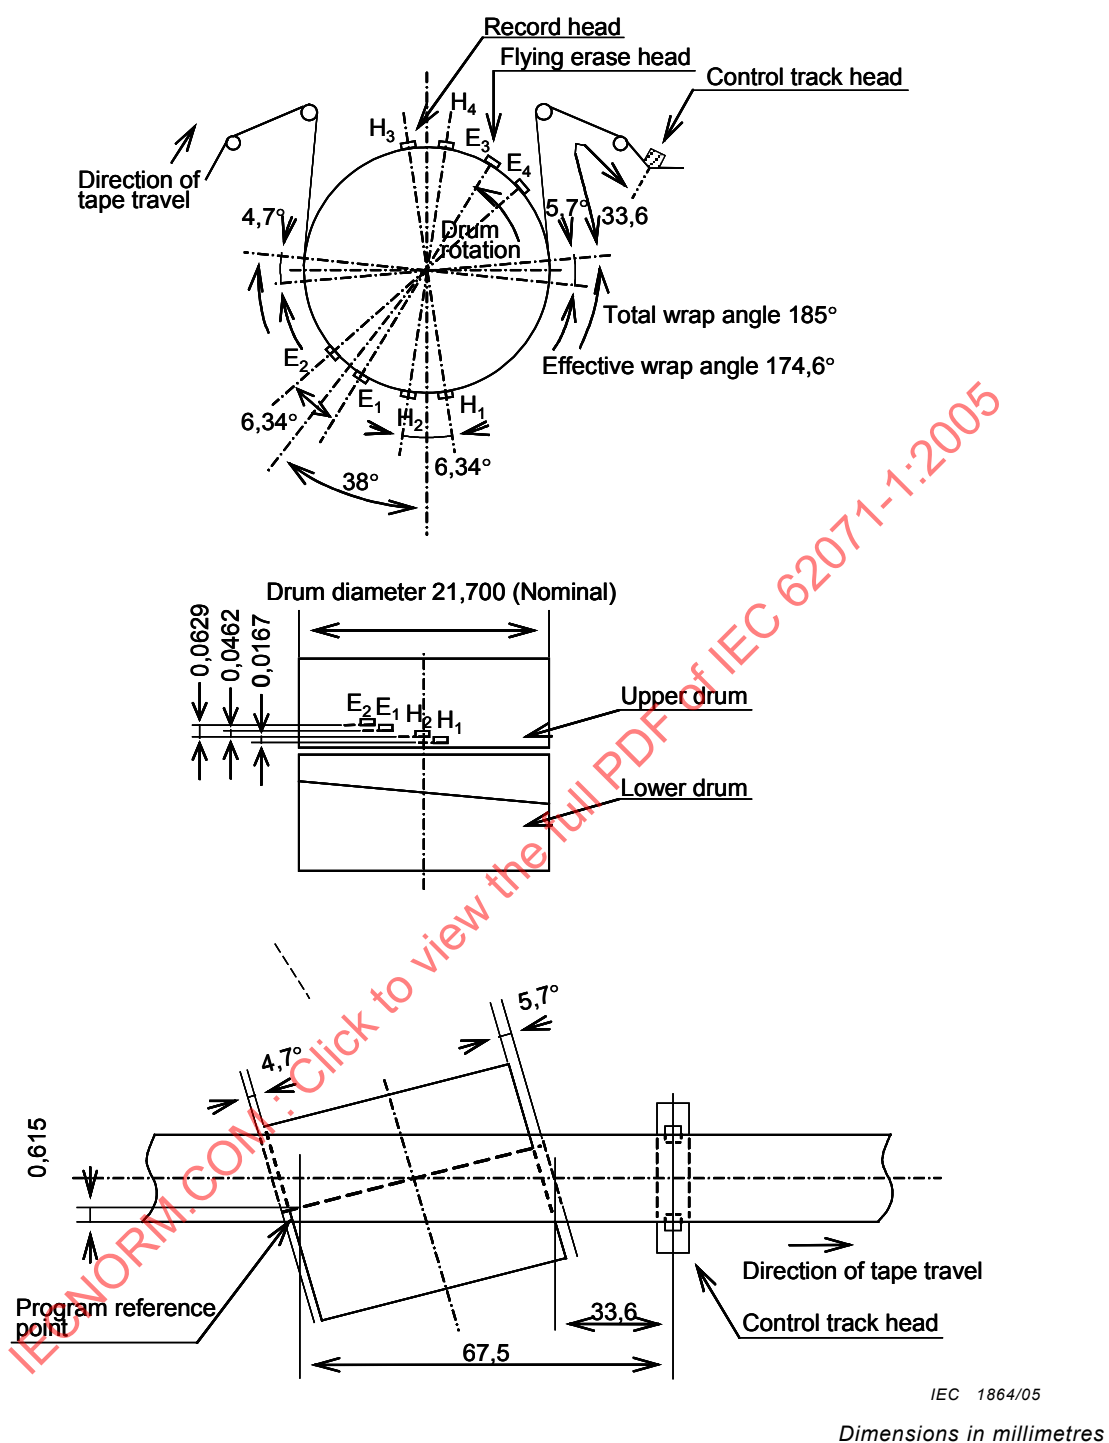


Figure 7 – A possible scanner configuration and tape wrap of 50 Mb/s format

7 Programme track data

7.1 General

7.1.1 Overview

For the 25 Mb/s format, each television frame is recorded on 10 tracks for the 525/60 system or 12 tracks for the 625/50 system. For the 50 Mb/s format, each television frame is recorded on 20 tracks for the 525/60 system or 24 tracks for the 625/50 system. The helical tracks contain digital data from the ITI sector, video sector, audio sector, and subcode sector.

The ITI sector contains the start sync and track information. The subcode sector contains the time and control code data and it may also include other optional data.

Figure 8 shows a typical block diagram of the recording circuit. All edit gaps between sectors accommodate timing errors during editing. Figure 9 shows the arrangement of the ITI sector, video and audio sectors, and the subcode sector on the tape.

For the generation of low frequency tracking information, the helical data stream is converted by 24/25 modulation to obtain the following conditions:

- Track F_0 : Attenuation of f_1 and f_2 frequency components by at least 9 dB;
- Track F_1 : Generation of f_1 component of at least 16 dB, but not more than 19 dB;
- Track F_2 : Generation of f_2 component of at least 16 dB, but not more than 19 dB

where

$$f_1 = f_b / 90 \text{ (Hz)}$$

$$f_2 = f_b / 60 \text{ (Hz)}$$

f_b = bit frequency: the frequency whose period is a time interval of one channel bit (Hz).


Tracks are recorded in the repeated cycle of $F_0 - F_1 - F_0 - F_2$ sequence.

In the 525/60 system for the 25 Mb/s format, PF shows the frame information for the second track of each frame. Figures 10 and 11 and Tables 7 and 8 show the arrangement of the pilot signals of the 25 Mb/s format. Figures 12 and 13 and Tables 9 and 10 show the arrangement of the pilot signals of the 50 Mb/s format. The frequency characteristics and the recorded level of the low frequency pilot signals shall be chosen in accordance with Figure 14.

The recommended frequency characteristic of the F_0 track is specified in Annex D.


7.1.2 Labelling convention

The most significant bit is written on the left and first recorded to tape. The lowest numbered byte is shown at the left/top and is the first encountered in the input data stream. Byte values are expressed in hexadecimal notation unless otherwise noted. An h subscript indicates a hexadecimal value.

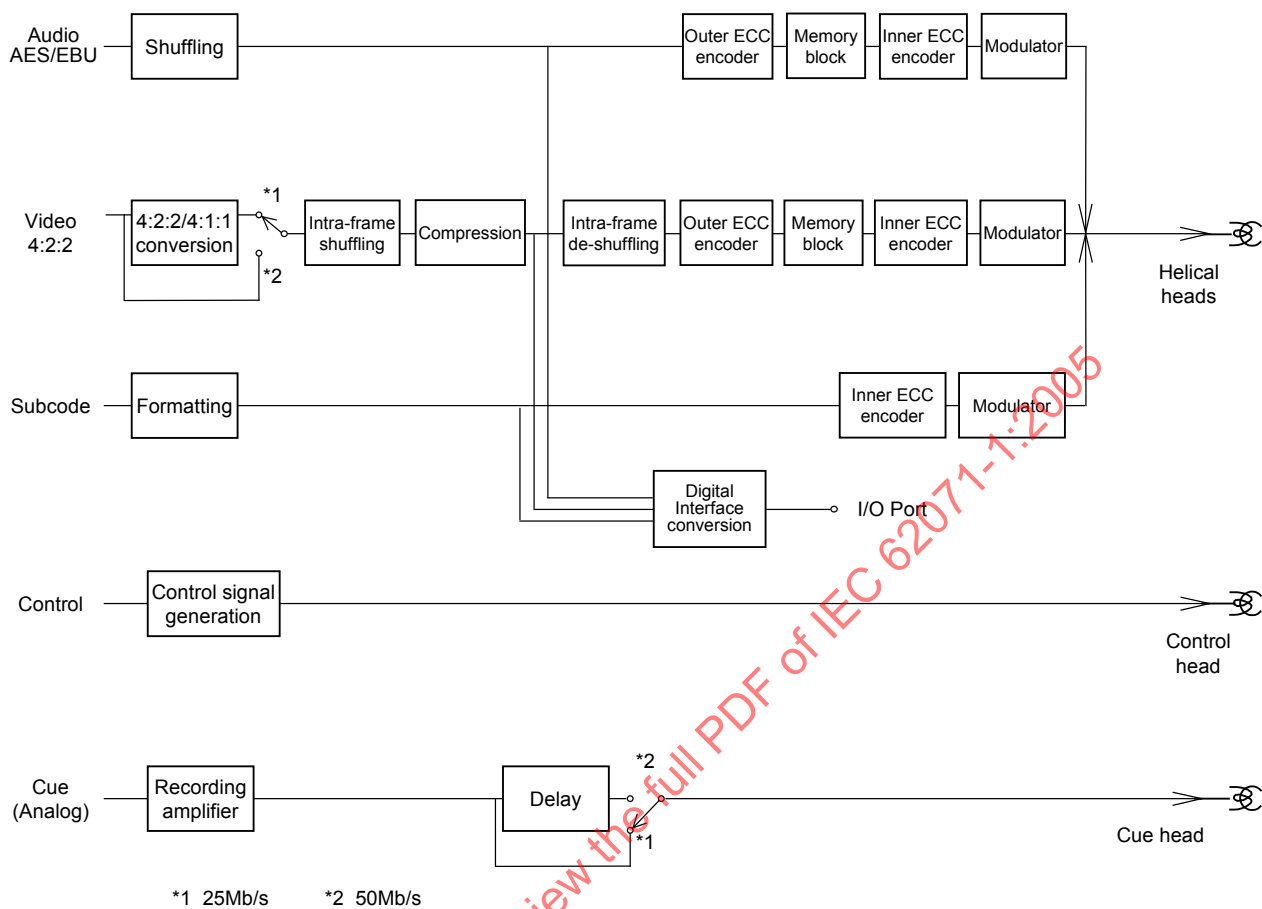

IEC 1865/05

Figure 8 – Possible recording system configuration with digital interface port (informative)

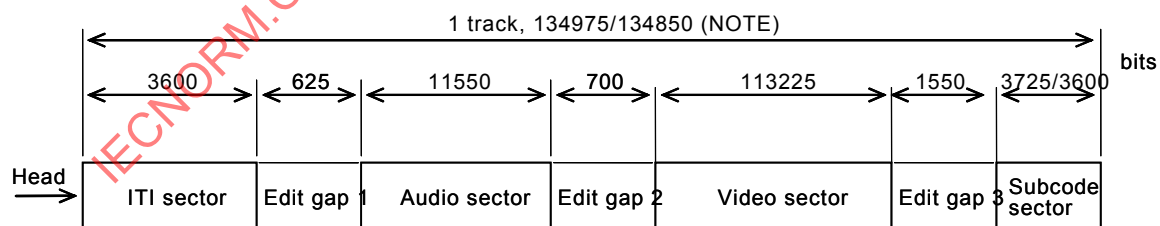

NOTE 525/60 system / 625/50 system

IEC 1866/05

Figure 9 – Sector arrangement on helical track

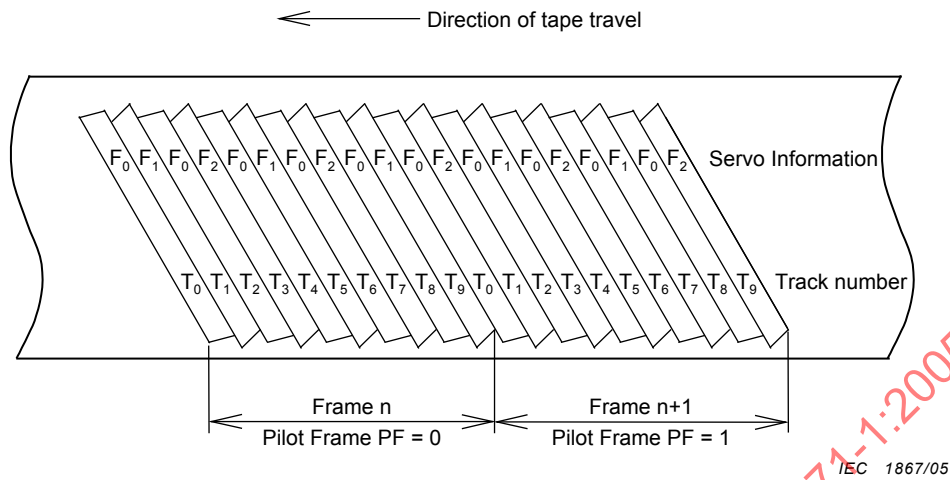


Figure 10 – Frames and tracks (525/60 system of 25 Mb/s format)

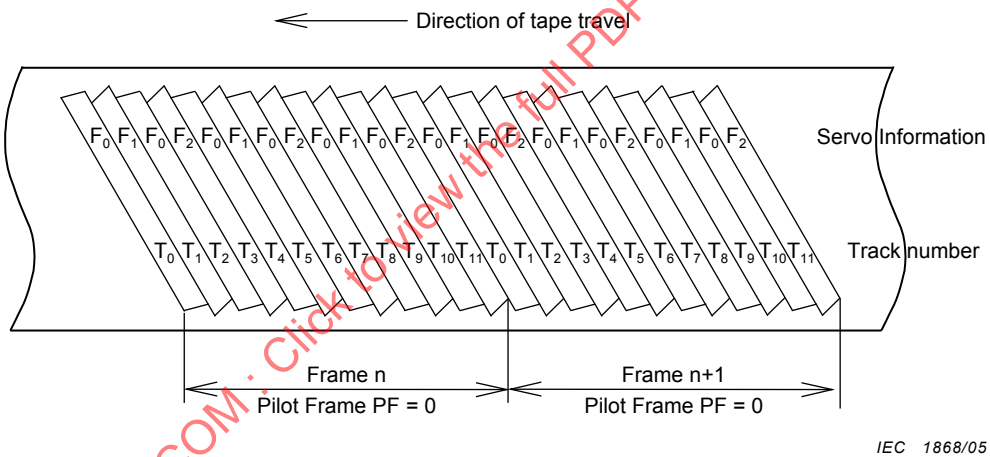


Figure 11 – Frames and tracks (625/50 system of 25 Mb/s format)

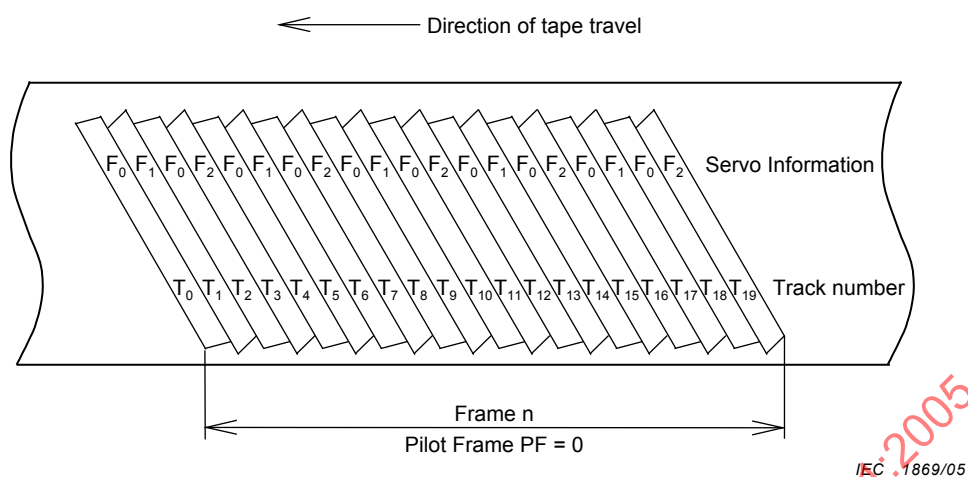


Figure 12 – A frame and tracks (525/60 system of 50 Mb/s format)

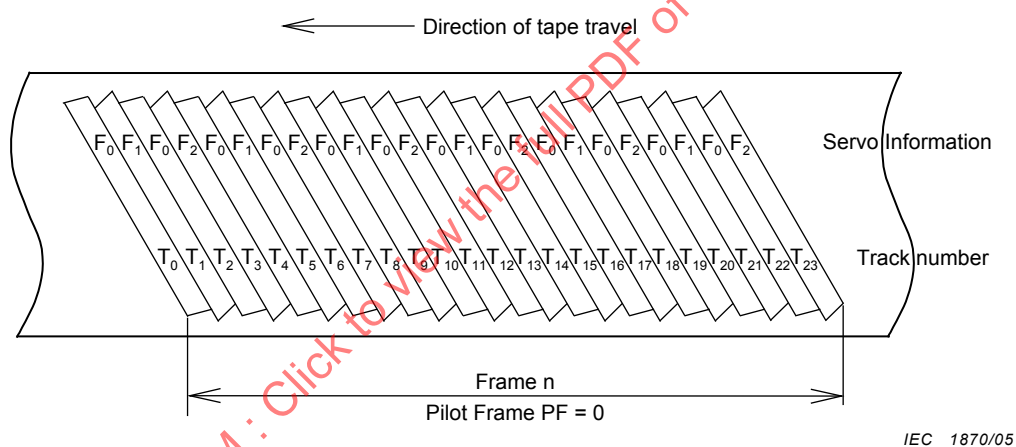


Figure 13 – A frame and tracks (625/50 system of 50 Mb/s format)

Table 7 – Frames and servo information (525/60 system of 25 Mb/s format)

Frame	Track number	Servo information	Pilot frame PF
Frame n	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
Frame $n+1$	T_0	F_0	1
	T_1	F_2	1
	T_2	F_0	1
	T_3	F_1	1
	T_4	F_0	1
	T_5	F_2	1
	T_6	F_0	1
	T_7	F_1	1
	T_8	F_0	1
	T_9	F_2	1

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

Table 8 – Frames and servo information (625/50 system of 25 Mb/s format)

Frame	Track number	Servo information	Pilot frame PF
Frame n	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
	T_{10}	F_0	0
	T_{11}	F_2	0
Frame $n+1$	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
	T_{10}	F_0	0
	T_{11}	F_2	0


Table 9 – A frame and servo information (525/60 system of 50 Mb/s format)

Frame	Track number	Servo information	Pilot frame PF
Frame <i>n</i>	T ₀	F ₀	0
	T ₁	F ₁	0
	T ₂	F ₀	0
	T ₃	F ₂	0
	T ₄	F ₀	0
	T ₅	F ₁	0
	T ₆	F ₀	0
	T ₇	F ₂	0
	T ₈	F ₀	0
	T ₉	F ₁	0
	T ₁₀	F ₀	0
	T ₁₁	F ₂	0
	T ₁₂	F ₀	0
	T ₁₃	F ₁	0
	T ₁₄	F ₀	0
	T ₁₅	F ₂	0
	T ₁₆	F ₀	0
	T ₁₇	F ₁	0
	T ₁₈	F ₀	0
	T ₁₉	F ₂	0

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

Table 10 – A frame and servo information (625/50 system of 50 Mb/s format)

Frame	Track number	Servo information	Pilot frame PF
Frame <i>n</i>	T ₀	F ₀	0
	T ₁	F ₁	0
	T ₂	F ₀	0
	T ₃	F ₂	0
	T ₄	F ₀	0
	T ₅	F ₁	0
	T ₆	F ₀	0
	T ₇	F ₂	0
	T ₈	F ₀	0
	T ₉	F ₁	0
	T ₁₀	F ₀	0
	T ₁₁	F ₂	0
	T ₁₂	F ₀	0
	T ₁₃	F ₁	0
	T ₁₄	F ₀	0
	T ₁₅	F ₂	0
	T ₁₆	F ₀	0
	T ₁₇	F ₁	0
	T ₁₈	F ₀	0
	T ₁₉	F ₂	0
	T ₂₀	F ₀	0
	T ₂₁	F ₁	0
	T ₂₂	F ₀	0
	T ₂₃	F ₂	0

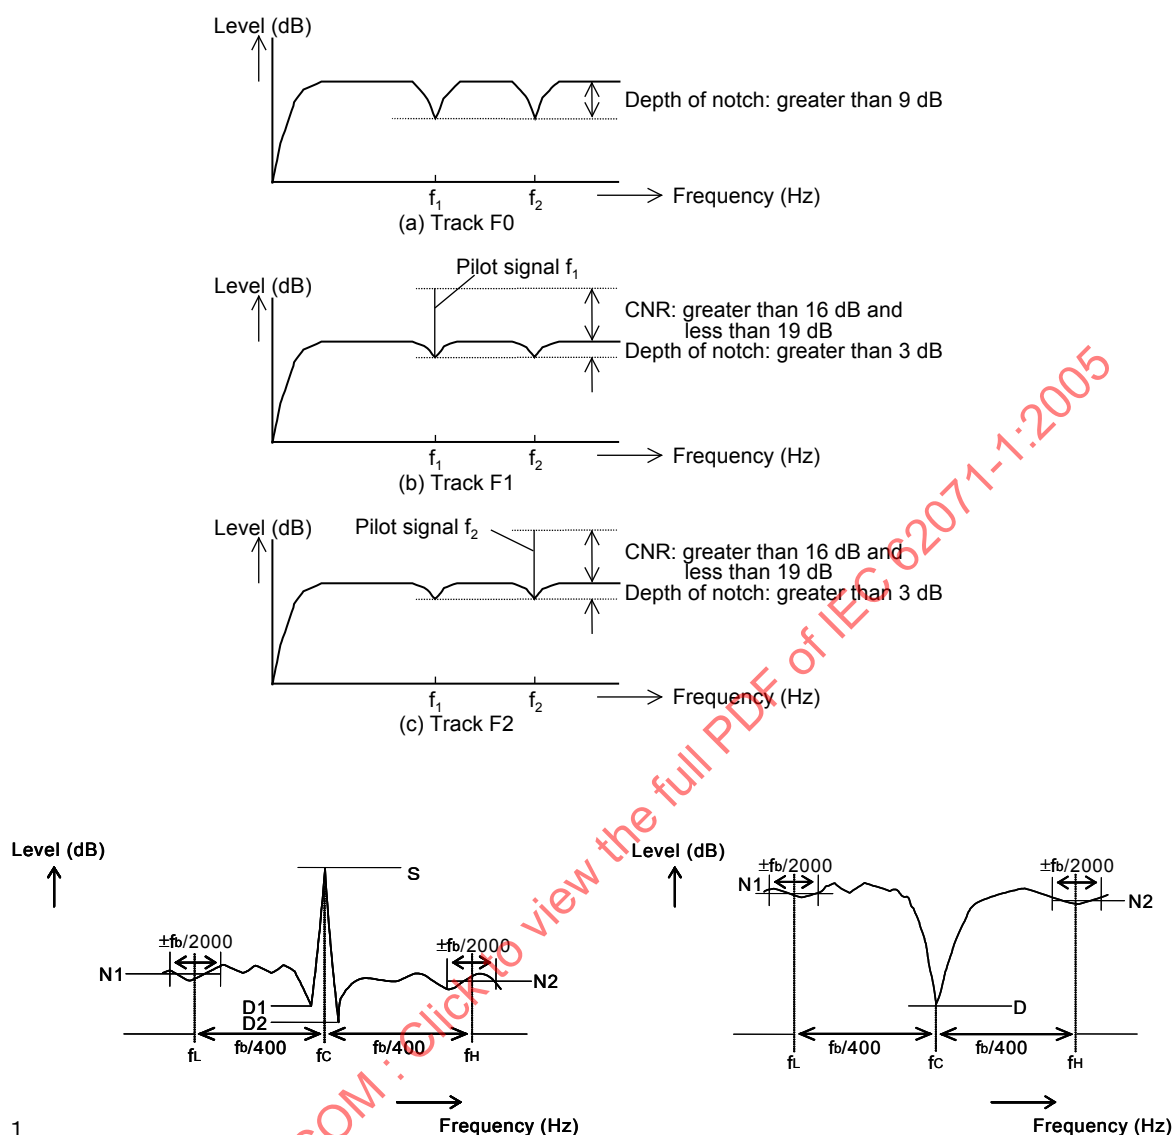

IEC 1871/05

NOTE 1 $f_1 = f_b / 90$ (Hz)

$f_2 = f_b / 60$ (Hz)

f_b is the frequency whose period is a time interval of one channel bit(Hz)

Resolution bandwidth $= f_b / 20925$ (Hz)

Data is obtained by integration over 30 repeated cycles

NOTE 2 $CNR = [S - (N_1 + N_2) / 2]$ (dB)

Depth of notch with peak $= [(N_1 + N_2) / 2 - (D_1 + D_2) / 2]$ (dB)

Depth of notch without peak $= [(N_1 + N_2) / 2 - D]$ (dB)

N_1 is defined as an average value over $f_L \pm f_b / 2000$ (dB)

N_2 is defined as an average value over $f_H \pm f_b / 2000$ (dB)

f_L is defined as $f_c - f_b / 400$ (Hz)

f_H is defined as $f_c + f_b / 400$ (Hz)

f_c means a peak or notch frequency (Hz)

Figure 14 – Frequency characteristics of tracks

7.1.3 Signal processing

Figures 15 to 17 show the processing of modulation related to the recorded signals. The programme track data with the exception of ID0 shall be processed through three operations as shown below:

- randomization;
- 24-25 modulation;
- pre-coding.

The programme track data of ID0 shall be processed through two operations as shown below:

- randomization;
- pre-coding.

Figure 18 shows a possible block diagram of the process.

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

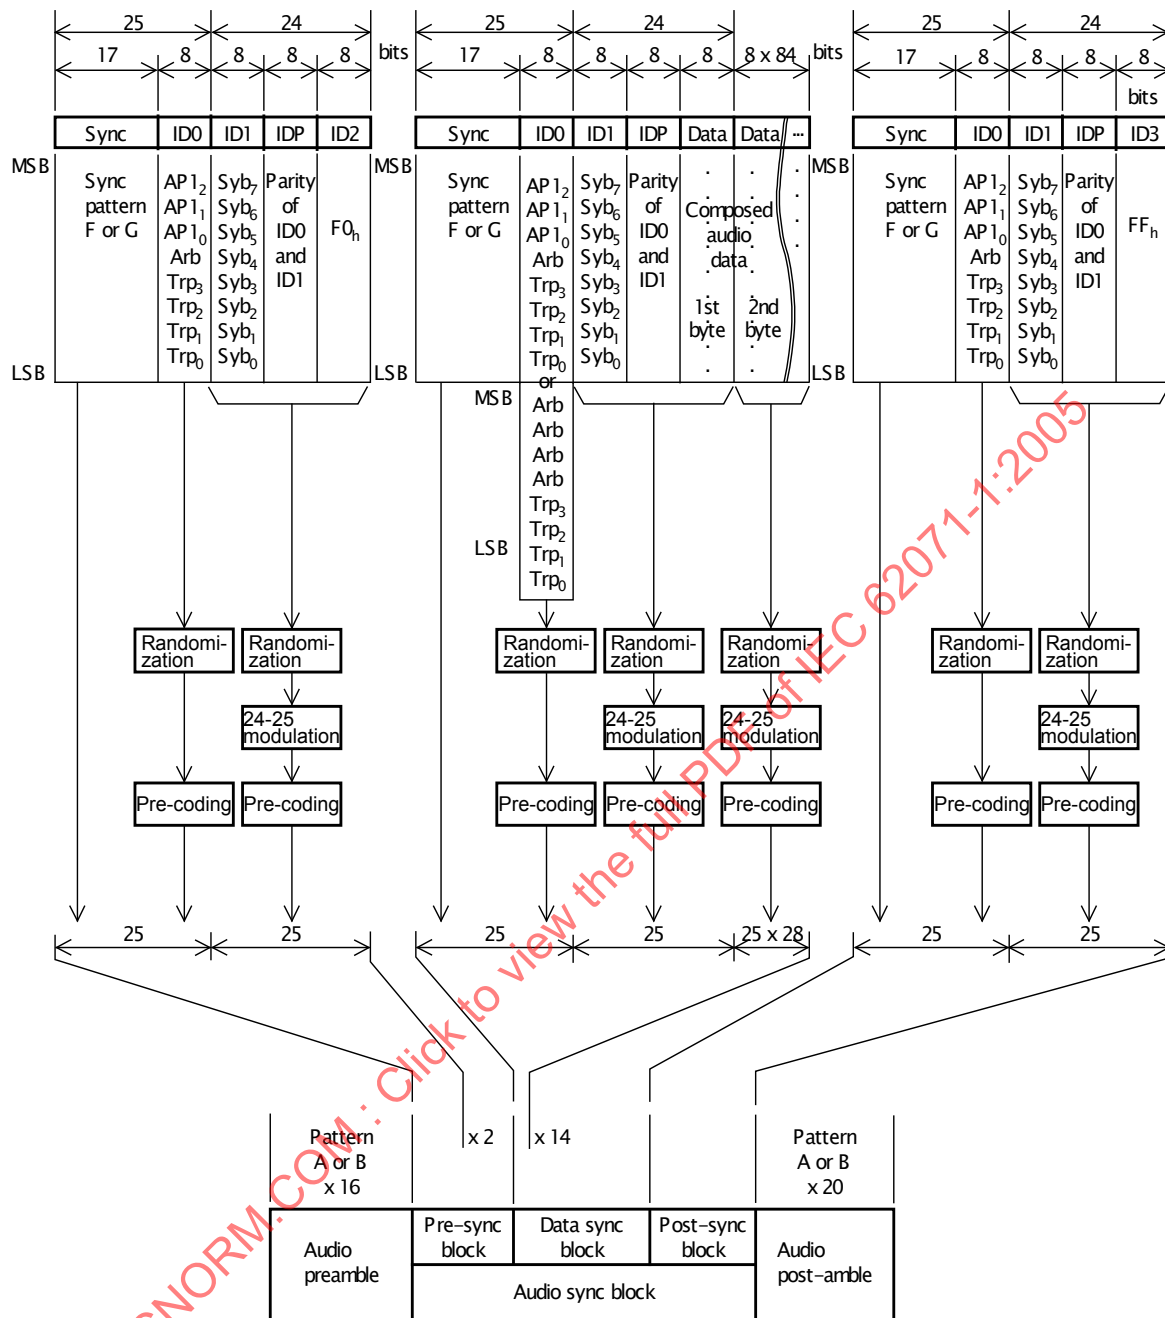


Figure 15 – Modulation for audio sector

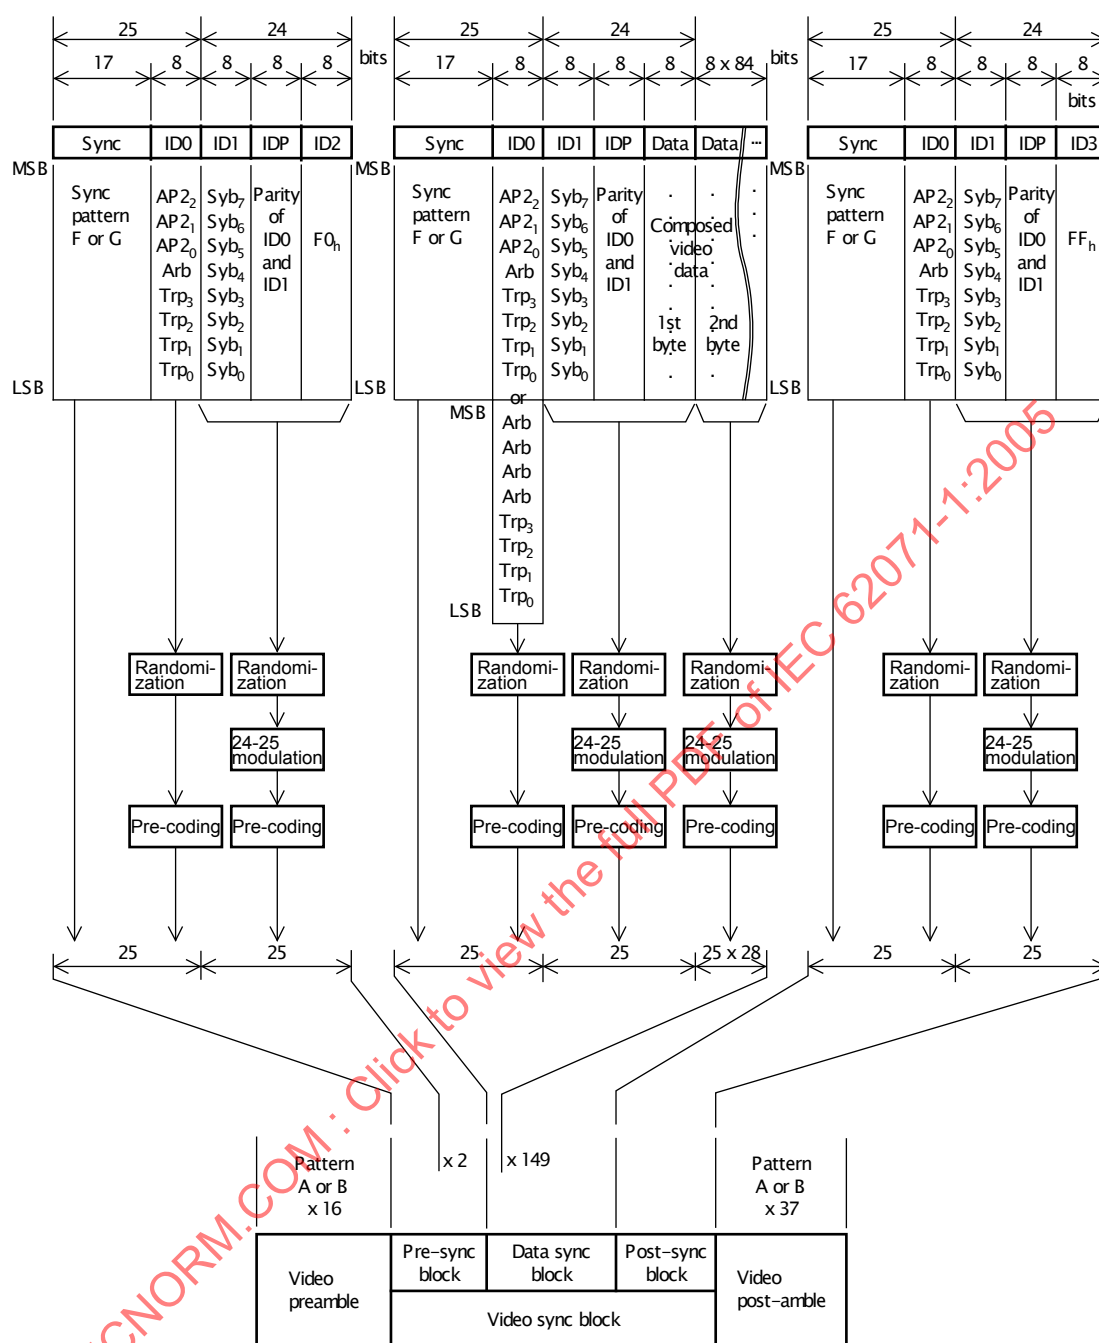


Figure 16 – Modulation for video sector


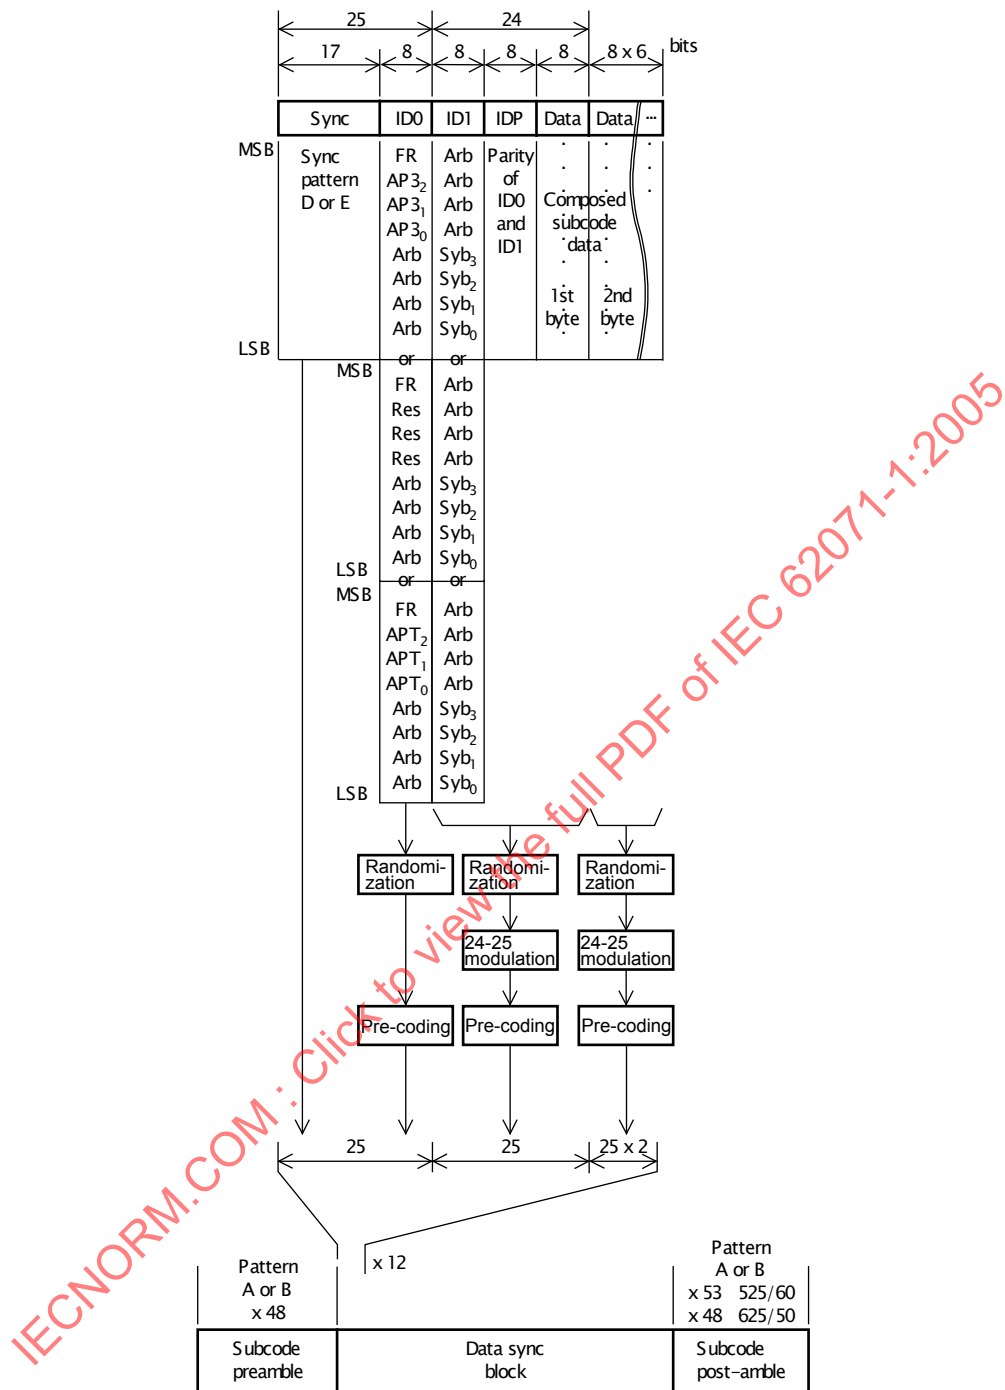


Figure 17 – Modulation for subcode sector

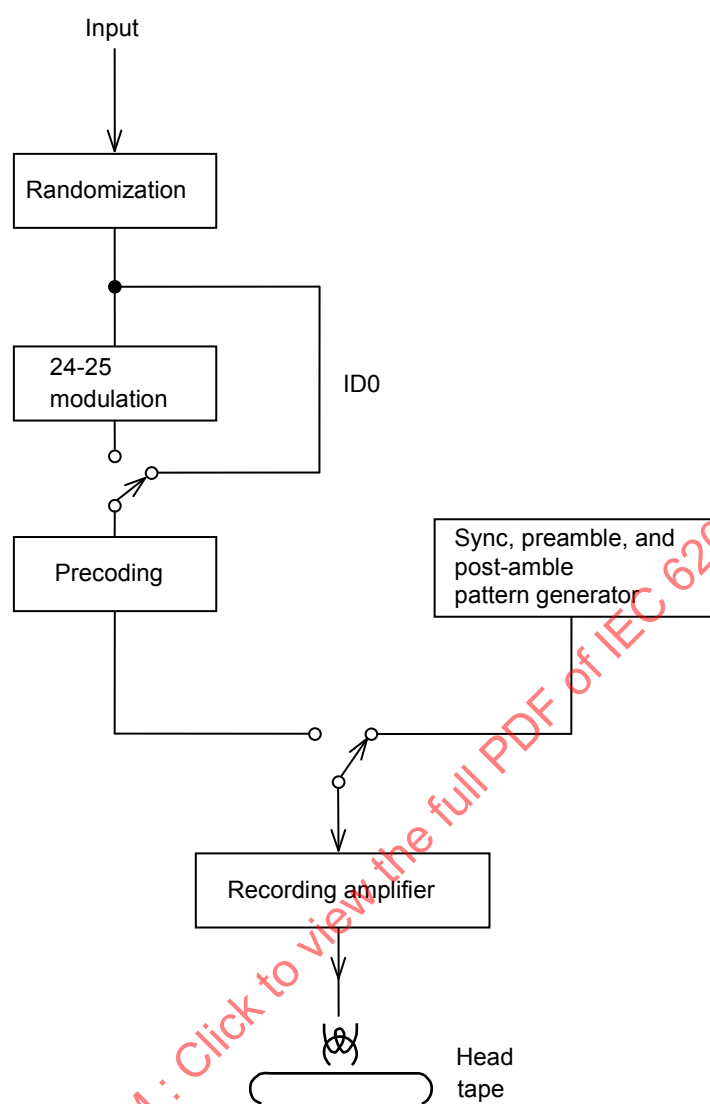

IEC 1875/05

Figure 18 – Possible block diagram for signal processing

7.1.3.1 Randomization

Bit streams of data except sync patterns shall be randomized. The randomizing is equivalent to performing the exclusive-or operation between the serial data stream and the serial stream generated by the polynomial function below:

$$X^7 + X^3 + 1$$

where X^i are place-keeping variables in GF(2), the binary field. The first term is the most significant and the first to enter the division computation. The randomizing is reset at ID0.

The randomization limits the run length of the same binary value.


7.1.3.2 24-25 modulation

The 24-25 modulation is applied to the randomized data bit stream. An extra bit is inserted into the bit stream at the beginning of three consecutive randomized bytes, as shown in Figure 19. The modulation output, 25 bits data, is referred to as a code word. The following criteria are used to insert a bit 1 or 0 at the beginning of each three consecutive bytes:

- if the run length of 1s or 0s, including the extra bit to be inserted at the junction, is shorter than 9, a bit generating the required pilot frequency is inserted;
- if the run length of 1s or 0s, including the extra bit to be inserted at the junction, exceeds 10, a bit which breaks the run continuation is inserted;
- including the extra bit to be inserted at the junction, and the run length of both 1s and 0s exceeds 10, a bit generating the required pilot frequency is inserted.


7.1.3.3 Pre-coding

The modulated bit stream shall be converted to interleaved NRZI as shown in Figures 15 to 17 and Figure 20.

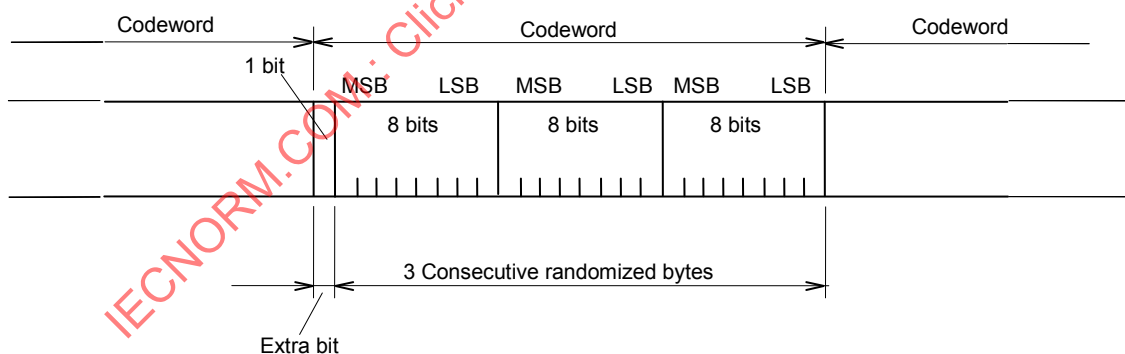

IEC 1876/05

Figure 19 – Bit stream before interleaved NRZI modulation

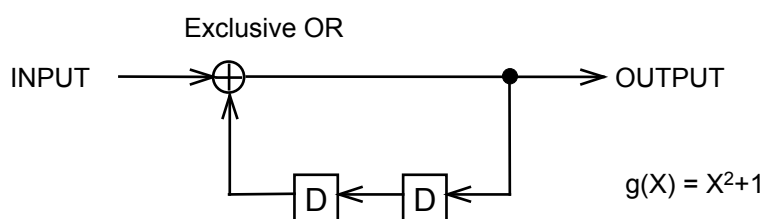

IEC 1877/05

Figure 20 – Pre-coding

7.1.4 Magnetization

7.1.4.1 Polarity

The recorder shall operate in reproduction without regard to the polarity of the recorded flux on the helical tracks.

7.1.4.2 Record equalization

The record current shall generate a record head gap flux level that is constant within ± 1 dB between f_1 and $f_b/2$.

7.1.4.3 Record current level

The optimum record current is 6 dB higher than the lower side of the current value producing 1 dB below the maximum playback output at $f_b/2$.

7.2 Insert and track information (ITI) sector

7.2.1 Structure

The ITI sector is located at the entrance side of each track for accurate placement of the reproducing

head. The ITI sector, after initial recording, is not replaced in an editing operation.

The ITI sector contains the following elements:

- ITI preamble;
- Start sync area (SSA);
- Track information area (TIA);
- ITI post-amble.

Figure 21 shows the structure of the ITI sector.


7.2.2 ITI preamble

The bit stream of the ITI preamble before the recording shall be defined as in Tables 11 to 13 in accordance with the low frequency appropriate pilot tone signal for each track. The length of the ITI preamble shall be 1400 bits as recorded on tape.

7.2.3 Start sync area (SSA)

SSA consists of 61 sync blocks and each sync block consists of 30 bits. Every start-sync block has a number which indicates the position of the sync block from the beginning of the SSA from zero.

The bit stream of the SSA after the modulation shall be as defined in Tables 14 to 16 in accordance with the low frequency pilot signals. The length of the SSA shall be 1830 bits as recorded on tape.

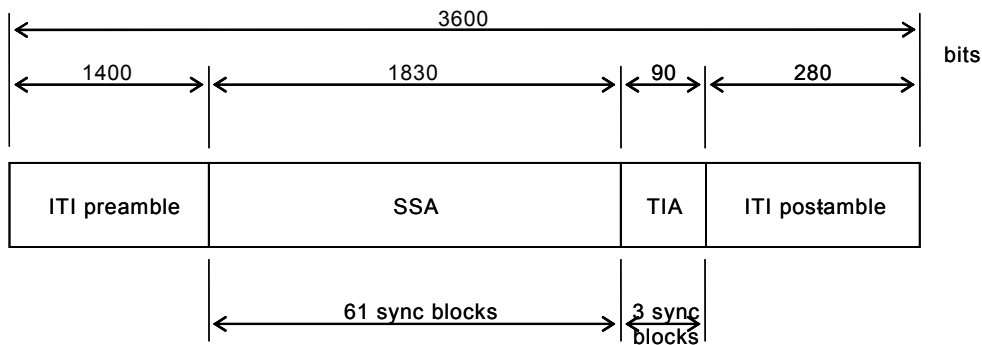

NOTE Each sync block has 30 bits.

IEC 1878/05

Figure 21 – Structure of ITI sector

Table 11 – Bit stream of ITI preamble for servo information F_0

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	1000101110	40	1000101110	80	1000101110	120	1000101110
1	1000101110	41	1000101110	81	1000101110	121	1000101110
2	1000101110	42	1000101110	82	1000101110	122	1000101110
3	1000101110	43	1000101110	83	1000101110	123	1000101110
4	1000101110	44	1000101110	84	1000101110	124	1000101110
5	1000101110	45	1000101110	85	1000101110	125	1000101110
6	1000101110	46	1000101110	86	1000101110	126	1000101110
7	1000101110	47	1000101110	87	1000101110	127	1000101110
8	1000101110	48	1000101110	88	1000101110	128	1000101110
9	1000101110	49	1000101110	89	1000101110	129	1000101110
10	1000101110	50	1000101110	90	1000101110	130	1000101110
11	1000101110	51	1000101110	91	1000101110	131	1000101110
12	1000101110	52	1000101110	92	1000101110	132	1000101110
13	1000101110	53	1000101110	93	1000101110	133	1000101110
14	1000101110	54	1000101110	94	1000101110	134	1000101110
15	1000101110	55	1000101110	95	1000101110	135	1000101110
16	1000101110	56	1000101110	96	1000101110	136	1000101110
17	1000101110	57	1000101110	97	1000101110	137	1000101110
18	1000101110	58	1000101110	98	1000101110	138	1000101110
19	1000101110	59	1000101110	99	1000101110	139	1000101110
20	1000101110	60	1000101110	100	1000101110		
21	1000101110	61	1000101110	101	1000101110		
22	1000101110	62	1000101110	102	1000101110		
23	1000101110	63	1000101110	103	1000101110		
24	1000101110	64	1000101110	104	1000101110		
25	1000101110	65	1000101110	105	1000101110		
26	1000101110	66	1000101110	106	1000101110		
27	1000101110	67	1000101110	107	1000101110		
28	1000101110	68	1000101110	108	1000101110		
29	1000101110	69	1000101110	109	1000101110		
30	1000101110	70	1000101110	110	1000101110		
31	1000101110	71	1000101110	111	1000101110		
32	1000101110	72	1000101110	112	1000101110		
33	1000101110	73	1000101110	113	1000101110		
34	1000101110	74	1000101110	114	1000101110		
35	1000101110	75	1000101110	115	1000101110		
36	1000101110	76	1000101110	116	1000101110		
37	1000101110	77	1000101110	117	1000101110		
38	1000101110	78	1000101110	118	1000101110		
39	1000101110	79	1000101110	119	1000101110		

Table 12 – Bit stream of ITI preamble for servo information F₁

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	1101110001	40	1000101110	80	0010001110	120	1101110001
1	1101110001	41	0010001110	81	1101110001	121	1000101110
2	1101110001	42	0010001110	82	1101110001	122	0010001110
3	1101110001	43	0010001110	83	1101110001	123	0010001110
4	1000101110	44	0010001110	84	1101110001	124	0010001110
5	0010001110	45	1101110001	85	1000101110	125	0010001110
6	0010001110	46	1101110001	86	0010001110	126	1101110001
7	0010001110	47	1101110001	87	0010001110	127	1101110001
8	0010001110	48	1101110001	88	0010001110	128	1101110001
9	1101110001	49	1000101110	89	0010001110	129	1101110001
10	1101110001	50	0010001110	90	1101110001	130	1000101110
11	1101110001	51	0010001110	91	1101110001	131	0010001110
12	1101110001	52	0010001110	92	1101110001	132	0010001110
13	1000101110	53	0010001110	93	1101110001	133	0010001110
14	0010001110	54	1101110001	94	1000101110	134	0010001110
15	0010001110	55	1101110001	95	0010001110	135	1101110001
16	0010001110	56	1101110001	96	0010001110	136	1101110001
17	0010001110	57	1101110001	97	0010001110	137	1101110001
18	1101110001	58	1000101110	98	0010001110	138	1101110001
19	1101110001	59	0010001110	99	1101110001	139	1000101110
20	1101110001	60	0010001110	100	1101110001		
21	1101110001	61	0010001110	101	1101110001		
22	1000101110	62	0010001110	102	1101110001		
23	0010001110	63	1101110001	103	1000101110		
24	0010001110	64	1101110001	104	0010001110		
25	0010001110	65	1101110001	105	0010001110		
26	0010001110	66	1101110001	106	0010001110		
27	1101110001	67	1000101110	107	0010001110		
28	1101110001	68	0010001110	108	1101110001		
29	1101110001	69	0010001110	109	1101110001		
30	1101110001	70	0010001110	110	1101110001		
31	1000101110	71	0010001110	111	1101110001		
32	0010001110	72	1101110001	112	1000101110		
33	0010001110	73	1101110001	113	0010001110		
34	0010001110	74	1101110001	114	0010001110		
35	0010001110	75	1101110001	115	0010001110		
36	1101110001	76	1000101110	116	0010001110		
37	1101110001	77	0010001110	117	1101110001		
38	1101110001	78	0010001110	118	1101110001		
39	1101110001	79	0010001110	119	1101110001		

Table 13 – Bit stream of ITI preamble for servo information F_2

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	1101110001	40	0010001110	80	1101110001	120	1101110001
1	1101110001	41	0010001110	81	0010001110	121	1101110001
2	1101110001	42	1101110001	82	0010001110	122	1101110001
3	0010001110	43	1101110001	83	0010001110	123	0010001110
4	0010001110	44	1101110001	84	1101110001	124	0010001110
5	0010001110	45	0010001110	85	1101110001	125	0010001110
6	1101110001	46	0010001110	86	1101110001	126	1101110001
7	1101110001	47	0010001110	87	0010001110	127	1101110001
8	1101110001	48	1101110001	88	0010001110	128	1101110001
9	0010001110	49	1101110001	89	0010001110	129	0010001110
10	0010001110	50	1101110001	90	1101110001	130	0010001110
11	0010001110	51	0010001110	91	1101110001	131	0010001110
12	1101110001	52	0010001110	92	1101110001	132	1101110001
13	1101110001	53	0010001110	93	0010001110	133	1101110001
14	1101110001	54	1101110001	94	0010001110	134	1101110001
15	0010001110	55	1101110001	95	0010001110	135	0010001110
16	0010001110	56	1101110001	96	1101110001	136	0010001110
17	0010001110	57	0010001110	97	1101110001	137	0010001110
18	1101110001	58	0010001110	98	1101110001	138	1101110001
19	1101110001	59	0010001110	99	0010001110	139	1101110001
20	1101110001	60	1101110001	100	0010001110		
21	0010001110	61	1101110001	101	0010001110		
22	0010001110	62	1101110001	102	1101110001		
23	0010001110	63	0010001110	103	1101110001		
24	1101110001	64	0010001110	104	1101110001		
25	1101110001	65	0010001110	105	0010001110		
26	1101110001	66	1101110001	106	0010001110		
27	0010001110	67	1101110001	107	0010001110		
28	0010001110	68	1101110001	108	1101110001		
29	0010001110	69	0010001110	109	1101110001		
30	1101110001	70	0010001110	110	1101110001		
31	1101110001	71	0010001110	111	0010001110		
32	1101110001	72	1101110001	112	0010001110		
33	0010001110	73	1101110001	113	0010001110		
34	0010001110	74	1101110001	114	1101110001		
35	0010001110	75	0010001110	115	1101110001		
36	1101110001	76	0010001110	116	1101110001		
37	1101110001	77	0010001110	117	0010001110		
38	1101110001	78	1101110001	118	0010001110		
39	0010001110	79	1101110001	119	0010001110		

Table 14 – Bit stream of SSA for servo information F_0

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	0010011101	50	0101010101	100	0110101001	150	0010011101
1	0101010101	51	0010011101	101	0101011001	151	0110010101
2	0101010101	52	0101101001	102	0010011101	152	0101101001
3	0010011101	53	0101011001	103	0110101001	153	0010011101
4	0101010101	54	0010011101	104	0101101001	154	0110010101
5	0101011001	55	0101101001	105	0010011101	155	0101100101
6	0010011101	56	0101101001	106	0110101001	156	0010011101
7	0101010101	57	0010011101	107	0101100101	157	0110010101
8	0101101001	58	0101101001	108	0010011101	158	0110101001
9	0010011101	59	0101100101	109	0110101001	159	0010011101
10	0101010101	60	0010011101	110	0110101001	160	0110010101
11	0101100101	61	0101101001	111	0010011101	161	0110100101
12	0010011101	62	0110101001	112	0110101001	162	0010011101
13	0101010101	63	0010011101	113	0110100101	163	0110010101
14	0110101001	64	0101101001	114	0010011101	164	0110010101
15	0010011101	65	0110100101	115	0110101001	165	0010011101
16	0101010101	66	0010011101	116	0110010101	166	0110010101
17	0110100101	67	0101101001	117	0010011101	167	0110011001
18	0010011101	68	0110010101	118	0110101001	168	0010011101
19	0101010101	69	0010011101	119	0110011001	169	0110011001
20	0110010101	70	0101101001	120	0010011101	170	0101010101
21	0010011101	71	0110011001	121	0110100101	171	0010011101
22	0101010101	72	0010011101	122	0101010101	172	0110011001
23	0110011001	73	0101100101	123	0010011101	173	0101011001
24	0010011101	74	0101010101	124	0110100101	174	0010011101
25	0101011001	75	0010011101	125	0101011001	175	0110011001
26	0101010101	76	0101100101	126	0010011101	176	0101101001
27	0010011101	77	0101011001	127	0110100101	177	0010011101
28	0101011001	78	0010011101	128	0101101001	178	0110011001
29	0101011001	79	0101100101	129	0010011101	179	0101100101
30	0010011101	80	0101101001	130	0110100101	180	0010011101
31	0101011001	81	0010011101	131	0101100101	181	0110011001
32	0101101001	82	0101100101	132	0010011101	182	0110101001
33	0010011101	83	0101100101	133	0110100101		
34	0101011001	84	0010011101	134	0110101001		
35	0101100101	85	0101100101	135	0010011101		
36	0010011101	86	0110101001	136	0110100101		
37	0101011001	87	0010011101	137	0110100101		
38	0110101001	88	0101100101	138	0010011101		
39	0010011101	89	0110100101	139	0110100101		
40	0101011001	90	0010011101	140	0110010101		
41	0110100101	91	0101100101	141	0010011101		
42	0010011101	92	0110010101	142	0110100101		
43	0101011001	93	0010011101	143	0110011001		
44	0110010101	94	0101100101	144	0010011101		
45	0010011101	95	0110011001	145	0110010101		
46	0101011001	96	0010011101	146	0101010101		
47	0110011001	97	0110101001	147	0010011101		
48	0010011101	98	0101010101	148	0110010101		
49	0101101001	99	0010011101	149	0101011001		

Table 15 – Bit stream of SSA for servo information F₁

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	0111001000	50	0101010111	100	1001010100	150	1000110111
1	1010101000	51	1000110111	101	1010100100	151	0110010111
2	1010101000	52	0101101011	102	0111001000	152	0101101001
3	0111001000	53	0101011001	103	0110101011	153	0111001000
4	0101010111	54	0111001000	104	0101101011	154	1001101000
5	0101011011	55	1010010100	105	1000110111	155	1010011000
6	1000110111	56	1010010100	106	0110101011	156	0111001000
7	0101010111	57	0111001000	107	0101100101	157	0110010111
8	0101101001	58	0101101011	108	0111001000	158	0110101011
9	0111001000	59	0101100111	109	1001010100	159	1000110111
10	1010101000	60	1000110111	110	1001010100	160	0110010111
11	1010011000	61	0101101011	111	0111001000	161	0110100101
12	0111001000	62	0110101001	112	0110101011	162	0111001000
13	0101010111	63	0111001000	113	0110100111	163	1001101000
14	0110101011	64	1010010100	114	1000110111	164	1001101000
15	1000110111	65	1001011000	115	0110101011	165	0111001000
16	0101010111	66	0111001000	116	0110010101	166	0110010111
17	0110100101	67	0101101011	117	0111001000	167	0110011011
18	0111001000	68	0110010111	118	1001010100	168	1000110111
19	1010101000	69	1000110111	119	1001100100	169	0110011011
20	1001101000	70	0101101011	120	0111001000	170	0101010101
21	0111001000	71	0110011001	121	0110100111	171	0111001000
22	0101010111	72	0111001000	122	0101010111	172	1001100100
23	0110011011	73	1010011000	123	1000110111	173	1010100100
24	1000110111	74	1010101000	124	0110100111	174	0111001000
25	0101011011	75	0111001000	125	0101011001	175	0110011011
26	0101010101	76	0101100111	126	0111001000	176	0101101011
27	0111001000	77	0101011011	127	1001011000	177	1000110111
28	1010100100	78	1000110111	128	1010010100	178	0110011011
29	1010100100	79	0101100111	129	0111001000	179	0101100101
30	0111001000	80	0101101001	130	0110100111	180	0111001000
31	0101011011	81	0111001000	131	0101100111	181	1001100100
32	0101101011	82	1010011000	132	1000110111	182	1001010100
33	1000110111	83	1010011000	133	0110100111		
34	0101011011	84	0111001000	134	0110101001		
35	0101100101	85	0101100111	135	0111001000		
36	0111001000	86	0110101011	136	1001011000		
37	1010100100	87	1000110111	137	1001011000		
38	1001010100	88	0101100111	138	0111001000		
39	0111001000	89	0110100101	139	0110100111		
40	0101011011	90	0111001000	140	0110010111		
41	0110100111	91	1010011000	141	1000110111		
42	1000110111	92	1001101000	142	0110100111		
43	0101011011	93	0111001000	143	0110011001		
44	0110010101	94	0101100111	144	0111001000		
45	0111001000	95	0110011011	145	1001101000		
46	1010100100	96	1000110111	146	1010101000		
47	1001100100	97	0110101011	147	0111001000		
48	0111001000	98	0101010101	148	0110010111		
49	0101101011	99	0111001000	149	0101011011		


Table 16 – Bit stream of SSA for servo information F₂

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	1000110111	50	1010101000	100	0110101011	150	1000110111
1	1010101000	51	0111001000	101	0101011011	151	1001101000
2	1010101000	52	0101101011	102	1000110111	152	1010010100
3	0111001000	53	0101011011	103	1001010100	153	0111001000
4	0101010111	54	1000110111	104	1010010100	154	0110010111
5	0101011011	55	1010010100	105	0111001000	155	0101100111
6	1000110111	56	1010010100	106	0110101011	156	1000110111
7	1010101000	57	0111001000	107	0101100111	157	1001101000
8	1010010100	58	0101101011	108	1000110111	158	1001010100
9	0111001000	59	0101100111	109	1001010100	159	0111001000
10	0101010111	60	1000110111	110	1001010100	160	0110010111
11	0101100111	61	1010010100	111	0111001000	161	0110100111
12	1000110111	62	1001010100	112	0110101011	162	1000110111
13	1010101000	63	0111001000	113	0110100111	163	1001101000
14	1001010100	64	0101101011	114	1000110111	164	1001101000
15	0111001000	65	0110100111	115	1001010100	165	0111001000
16	0101010111	66	1000110111	116	1001101000	166	0110010111
17	0110100111	67	1010010100	117	0111001000	167	0110011011
18	1000110111	68	1001101000	118	0110101011	168	1000110111
19	1010101000	69	0111001000	119	0110011011	169	1001100100
20	1001101000	70	0101101011	120	1000110111	170	1010101000
21	0111001000	71	0110011011	121	1001011000	171	0111001000
22	0101010111	72	1000110111	122	1010101000	172	0110011011
23	0110011011	73	1010011000	123	0111001000	173	0101011011
24	1000110111	74	1010101000	124	0110100111	174	1000110111
25	1010100100	75	0111001000	125	0101011011	175	1001100100
26	1010101000	76	0101100111	126	1000110111	176	1010010100
27	0111001000	77	0101011011	127	1001011000	177	0111001000
28	0101011011	78	1000110111	128	1010010100	178	0110011011
29	0101011011	79	1010011000	129	0111001000	179	0101100111
30	1000110111	80	1010010100	130	0110100111	180	1000110111
31	1010100100	81	0111001000	131	0101100111	181	1001100100
32	1010010100	82	0101100111	132	1000110111	182	1001010100
33	0111001000	83	0101100111	133	1001011000		
34	0101011011	84	1000110111	134	1001010100		
35	0101100111	85	1010011000	135	0111001000		
36	1000110111	86	1001010100	136	0110100111		
37	1010100100	87	0111001000	137	0110100111		
38	1001010100	88	0101100111	138	1000110111		
39	0111001000	89	0110100111	139	1001011000		
40	0101011011	90	1000110111	140	1001101000		
41	0110100111	91	1010011000	141	0111001000		
42	1000110111	92	1001101000	142	0110100111		
43	1010100100	93	0111001000	143	0110011011		
44	1001101000	94	0101100111	144	1000110111		
45	0111001000	95	0110011011	145	1001101000		
46	0101011011	96	1000110111	146	1010101000		
47	0110011011	97	1001010100	147	0111001000		
48	1000110111	98	1010101000	148	0110010111		
49	1010010100	99	0111001000	149	0101011011		

7.2.4 Track information area (TIA)

Track information area (TIA) consists of three sync blocks. Each sync block consists of 30 bits as shown in Figure 22. Every sync block has the same track information. Before the randomization, application ID of the track information shall be defined as in Table 17. The pilot frame shall be assigned as in Table 18.

Before the recording, the bit stream of the TIA shall be as defined in Tables 19 to 21 in accordance with the low frequency pilot signals. The length of the TIA shall be 90 bits as recorded on tape.

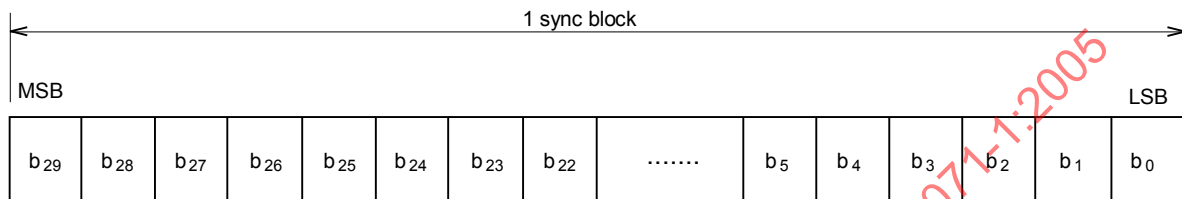

IEC 1879/05

Figure 22 – Structure of sync block of TIA

Table 17 – Application ID of track information

b ₁₇	b ₁₆	b ₁₅	b ₁₄	b ₁₃	b ₁₂	b ₇	b ₆	b ₅	b ₄	ID
APT ₂	APT ₂	APT ₁	APT ₁	APT ₀	APT ₀	TP ₁	TP ₁	TP ₀	TP ₀	
0	0	0	0	1	1	0	0	1	1	D-7 standard format
Others										Reserved

Table 18 – Pilot frame

	b ₃	b ₂
PF = 0	0	0
PF = 1	1	1

Table 19 – Bit stream of TIA for servo information F_0

PF = 0		PF = 1	
Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	0010011101	0	0010011101
1	0101011001	1	0101011001
2	0101101001	2	0101100101
3	0010011101	3	0010011101
4	0101011001	4	0101011001
5	0101101001	5	0101100101
6	0010011101	6	0010011101
7	0101011001	7	0101011001
8	0101101001	8	0101100101

Table 20 – Bit stream of TIA for servo information F_1

PF = 0		PF = 1	
Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	0111001000	0	0111001000
1	0101011011	1	0101011011
2	0101101011	2	0101100111
3	1000110111	3	1000110111
4	0101011011	4	0101011011
5	0101101001	5	0101100101
6	0111001000	6	0111001000
7	1010100100	7	1010100100
8	1010010100	8	1010011000

Table 21 – Bit stream of TIA for servo information F_2

PF = 0		PF = 1	
Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	0111001000	0	0111001000
1	0101011011	1	0101011011
2	0101101011	2	0101100111
3	1000110111	3	1000110111
4	1010100100	4	1010100100
5	1010010100	5	1010011000
6	0111001000	6	0111001000
7	0101011011	7	0101011011
8	0101101011	8	0101100111

7.2.5 ITI post-amble

The bit stream of the ITI post-amble before recording shall be as defined in Tables 22 to 24 in accordance with the low frequency pilot signals. The length of the ITI post-amble shall be 280 bits as recorded on tape.

Table 22 – Bit stream of ITI post-amble for servo information F_0

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	1000101110	10	1000101110	20	1000101110
1	1000101110	11	1000101110	21	1000101110
2	1000101110	12	1000101110	22	1000101110
3	1000101110	13	1000101110	23	1000101110
4	1000101110	14	1000101110	24	1000101110
5	1000101110	15	1000101110	25	1000101110
6	1000101110	16	1000101110	26	1000101110
7	1000101110	17	1000101110	27	1000101110
8	1000101110	18	1000101110		
9	1000101110	19	1000101110		

Table 23 – Bit stream of ITI post-amble for servo information F_1

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	0010001110	10	1101110001	20	1101110001
1	1101110001	11	1101110001	21	1101110001
2	1101110001	12	1101110001	22	1101110001
3	1101110001	13	1101110001	23	1000101110
4	1101110001	14	1000101110	24	0010001110
5	1000101110	15	0010001110	25	0010001110
6	0010001110	16	0010001110	26	0010001110
7	0010001110	17	0010001110	27	0010001110
8	0010001110	18	0010001110		
9	0010001110	19	1101110001		

Table 24 – Bit stream of ITI post-amble for servo information F_2

Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB	Order of recording	Codeword MSB LSB
0	1101110001	10	1101110001	20	0010001110
1	0010001110	11	1101110001	21	0010001110
2	0010001110	12	1101110001	22	1101110001
3	0010001110	13	0010001110	23	1101110001
4	1101110001	14	0010001110	24	1101110001
5	1101110001	15	0010001110	25	0010001110
6	1101110001	16	1101110001	26	0010001110
7	0010001110	17	1101110001	27	0010001110
8	0010001110	18	1101110001		
9	0010001110	19	0010001110		

7.3 Audio sector

7.3.1 Structure

The audio sector consists of the following elements:

- audio preamble;
- audio sync block;
- audio post-amble.

The audio sync block contains the following elements:

- pre-sync block;
- data sync block;
- post--sync block.

Figure 23 shows the structure of an audio sector.

The audio data in data sync block are described in Clause 8. The audio pre- and post-amble are described in 7.3.2 and 7.3.4 respectively. The audio sync block are described in 7.3.3.

7.3.2 Audio preamble

Two types of the audio preamble pattern are defined as shown below:

MSBLSB


Pattern A: 0 0 0 1 1 1 0 0 0 1 1 1 0 0 0 0 0 1 1 1 0 0 0 1 1

Pattern B: 1 1 1 0 0 0 1 1 1 0 0 0 1 1 1 1 1 0 0 0 1 1 1 0 0

Before the recording, a preamble pattern shall be chosen from the above two sequences according to the criteria as described in 7.1.3.2. The length of the audio preamble shall be 400 bits as recorded on tape.


7.3.3 Audio sync block

Three components, two pre-sync blocks, 14 data sync blocks, and one post-sync block constitute the overall audio sync block structure. Each of the two pre-sync blocks consists of a two-byte sync word and a four-byte ID word comprising ID0, ID1, IDP, and ID2. The post-sync block consists of a two-byte sync word and a four-byte ID word comprising ID0, ID1, IDP, and ID3. The audio data sync block consists of a two-byte sync word, a three-byte ID, and 85 bytes of audio data including inner parity, or 85 bytes of outer and inner parity data, as shown in Figure 24.

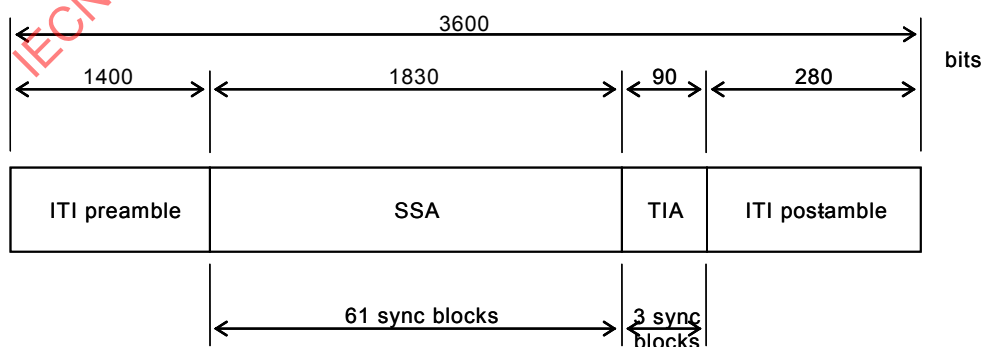

IEC 1880/05

Figure 23 – Structure of audio sector

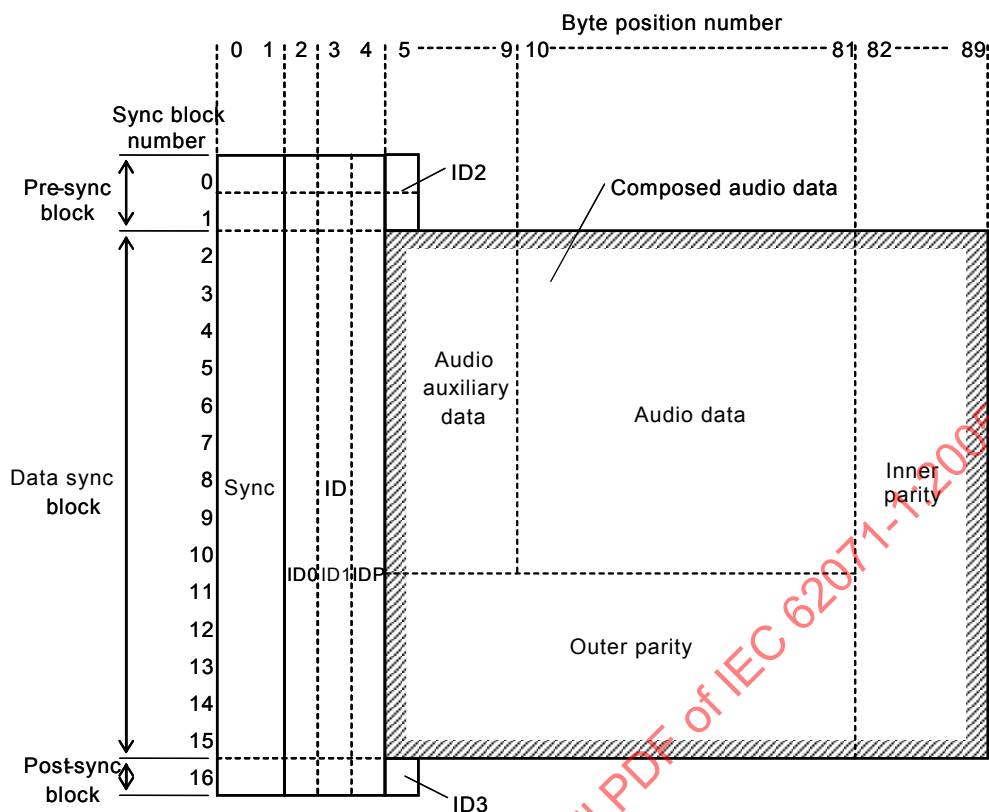

IEC 1881/05

NOTE Sync in byte position 0 and 1 shows the position. It is 17 bit pattern as specified in 7.3.3.1.

Figure 24 – Structure of sync blocks in audio sector

7.3.3.1 Sync

Two types of sync patterns are defined as shown below:

MSB	LSB
Sync pattern F : 0 0 0 1 1 1 1 1 1 1 1 0 0 0 1	
Sync pattern G : 1 1 1 0 0 0 0 0 0 0 0 0 1 1 1 0	

A sync pattern to be recorded shall be chosen from the above two sequences according to the criteria as described in 7.1.3.2. The length of the sync shall be 17 bits as recorded on tape.

7.3.3.2 ID

The ID consists of ID data (ID0, ID1) of 2 bytes, and ID parity (IDP) of 1 byte. As shown in Tables 25 to 28, the ID data consists of the audio application ID (AP1₂, AP1₁, AP1₀), track pair number (Trp₃, Trp₂, Trp₁, Trp₀), and sync block number (Syb₇, Syb₆, Syb₅, Syb₄, Syb₃, Syb₂, Syb₁, Syb₀).

– ID0

ID0 contains the information defined in Table 25. The length of ID0 shall be 8 bits before modulation. Audio application ID shall be as given in Table 26. The track pair number shall be as defined in Table 27 or 28.

Table 25 – ID0 in audio sector

	Sync block number 0, 1, 11 to 16	Sync block number 2 to 10
Bit 7	AP1 ₂	Arb
Bit 6	AP1 ₁	Arb
Bit 5	AP1 ₀	Arb
Bit 4	Arb	Arb
Bit 3	Trp ₃	Trp ₃
Bit 2	Trp ₂	Trp ₂
Bit 1	Trp ₁	Trp ₁
Bit 0	Trp ₀	Trp ₀

Table 26 – Audio application ID

Audio application ID			Format type
AP1 ₂	AP1 ₁	AP1 ₀	
0	0	0	Not used
0	0	1	D-7 format
0	1	0	Reserved
0	1	1	
1	0	0	
1	0	1	
1	1	0	
1	1	1	Not used

Table 27 – Track pair number for 25 Mb/s format

Track number	Track pair number							
	525/60 system				625/50 system			
	Trp ₃	Trp ₂	Trp ₁	Trp ₀	Trp ₃	Trp ₂	Trp ₁	Trp ₀
0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0
2	0	0	0	1	0	0	0	1
3	0	0	0	1	0	0	0	1
4	0	0	1	0	0	0	1	0
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
9	0	1	0	0	0	1	0	0
10	Non-existent				0	1	0	1
11					0	1	0	1

NOTE Track numbers as shown in Figure 10 or 11.

Table 28 – Track pair number for 50 Mb/s format

Track number	Track pair number							
	525/60 system				625/50 system			
	Trp ₃	Trp ₂	Trp ₁	Trp ₀	Trp ₃	Trp ₂	Trp ₁	Trp ₀
0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0
2	0	0	0	1	0	0	0	1
3	0	0	0	1	0	0	0	1
4	0	0	1	0	0	0	1	0
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
19	1	0	0	1	1	0	0	1
20	Non-existent				1	0	1	0
21					1	0	1	0
22					1	0	1	1
23					1	0	1	1

NOTE Track numbers as shown in Figure 12 or 13.

– ID1

ID1 contains the sync block number defined as follows:

MSB				LSB			
Syb ₇	Syb ₆	Syb ₅	Syb ₄	Syb ₃	Syb ₂	Syb ₁	Syb ₀

The length of ID1 shall be 8 bits before modulation.

The sync block numbers shall be numbered from 0 to 16 as shown in Figure 24.

Modulation shall be applied together with ID1, IDP, and ID2 or ID3 or the first audio data as shown in Figure 15. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3;
- IDP.

IDP is a parity byte of ID0 and ID1. The length of the IDP shall be 8 bits before modulation.

IDP is defined as a (12, 8, 3) BCH code of which the generator polynomial is $X^4 + X + 1$. The ID code is divided into two ID codewords (ID-CW0, ID-CW1). The bit assignment of ID codewords is shown in Table 29.

ID-CW0: C14, C12, C10, C8, C6, C4, C2, C0, P6, P4, P2, P0

ID-CW1: C15, C13, C11, C9, C7, C5, C3, C1, P7, P5, P3, P1

Parity bits P0 to P7 are given by the following equations:

$$\begin{aligned} P6 &= C14 \oplus C10 \oplus C6 \oplus C4 \\ P4 &= C14 \oplus C12 \oplus C8 \oplus C4 \oplus C2 \\ P2 &= C14 \oplus C12 \oplus C10 \oplus C6 \oplus C2 \oplus C0 \\ P0 &= C12 \oplus C8 \oplus C6 \oplus C0 \\ P7 &= C15 \oplus C11 \oplus C7 \oplus C5 \\ P5 &= C15 \oplus C13 \oplus C9 \oplus C5 \oplus C3 \\ P3 &= C15 \oplus C13 \oplus C11 \oplus C7 \oplus C3 \oplus C1 \\ P1 &= C13 \oplus C9 \oplus C7 \oplus C1 \end{aligned}$$

where $\oplus$ is the symbol of an exclusive -or.

Modulation shall be done together with ID1, IDP, and ID2 or ID3 or the first audio data as shown in Figure 15. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

Table 29 – Bit assignment of ID codewords

Byte position number			
	2 ID0	3 ID1	4 IDP
MSB	C15	C7	P7
	C14	C6	P6
	C13	C5	P5
	C12	C4	P4
	C11	C3	P3
	C10	C2	P2
	C9	C1	P1
LSB	C8	C0	P0

7.3.3.3 Additional ID (ID2, ID3)

Byte position number 5 of the pre-sync blocks (ID2) shall be set to $F0_h$ before modulation. Byte position number 5 of the post-sync block (ID3) shall be set to FF_h before modulation.

The following operations shall be performed on additional ID together with ID1, IDP, and ID2 or ID3 or the first audio data:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

7.3.3.4 Composed audio data

As shown in Figure 24, composed audio data contain the audio data, audio auxiliary data, inner error code, and outer error code.

The composed audio data length shall be 85 bytes. By including the last two bytes of the ID, the length of the composed audio data shall be 87 bytes, divisible into 3-byte length sections for additional processing as described below:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

7.3.4 Audio post-amble

The audio post-amble shall be the same as the audio preamble described in 7.3.2 except for the length. The length of the audio post-amble shall be 500 bits as recorded on tape. The following operations shall be performed:

- randomization: none;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: none.

7.4 Video sector

7.4.1 Structure

The video sector contains the following elements:

- video preamble;
- video sync block;
- video post-amble.

The video sync block contains the following elements:


- pre-sync block;
- data sync block;
- post-sync block.

Figure 25 shows the structure of the video sector.

The video data in data sync block are described in Clause 9. The video pre- and post-amble are described in 7.4.2 and 7.4.3.5 respectively. The video sync block is described in 7.4.3

7.4.2 Video preamble

The video preamble pattern shall be the same as that of the audio preamble described in 7.3.2. The length of the video preamble shall be 400 bits as recorded on tape.

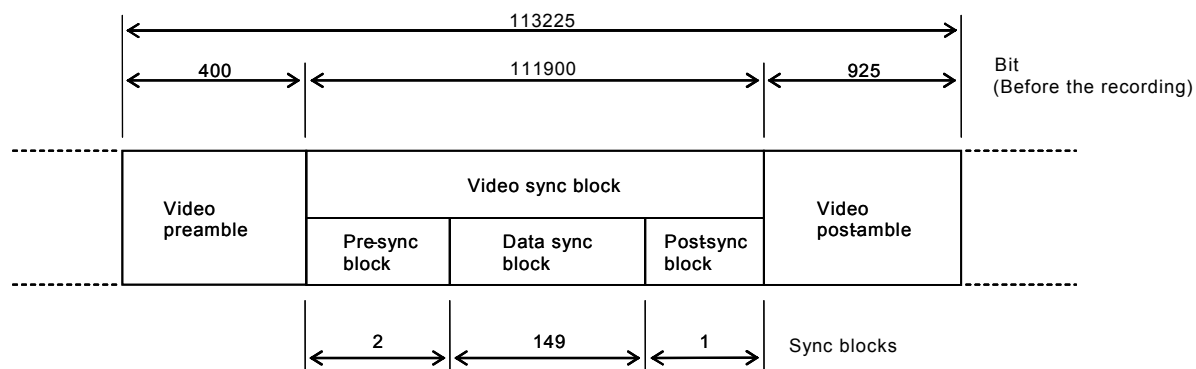

IEC 1882/05

Figure 25 – Structure of video sector**7.4.3 Video sync block**

Three components, two pre-sync blocks, 149 data sync blocks, and one post-sync block constitute the overall video sync block structure. Each of the two pre-sync blocks consists of a 2-byte sync word and a 4-byte ID word comprising ID0, ID1, IDP, and ID2. The post-sync block consists of a 2-byte sync word and a 4-byte ID word comprising ID0, ID1, IDP, and ID3. Each data sync block is comprised of either 1) 2-byte sync block word, 3-byte ID, 77 bytes of data and 8 inner parity bytes, or 2) 2-byte sync block word, 3-byte ID, 77 bytes of outer parity, and 8 inner parity bytes, as shown in Figure 26.

7.4.3.1 Sync

Sync shall be the same as the audio sync described in 7.3.3.1. The length of the sync shall be 17 bits as recorded on tape.

7.4.3.2 ID


ID consists of ID data (ID0, ID1) of 2 bytes and ID parity (IDP) of 1 byte. ID data consist of the video application ID (AP2₂, AP2₁, AP2₀), track pair number (Trp₃, Trp₂, Trp₁, Trp₀), and sync block number (Syb₇, Syb₆, Syb₅, ..., Syb₀).

– ID0

ID0 contains the information given in Table 30. The length of ID0 shall be 8 bits before modulation.

Video application ID shall be as specified in Table 31. The track pair number shall be the same as that indicated in Table 27 or 28. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: none;
- pre-coding: see 7.1.3.3.

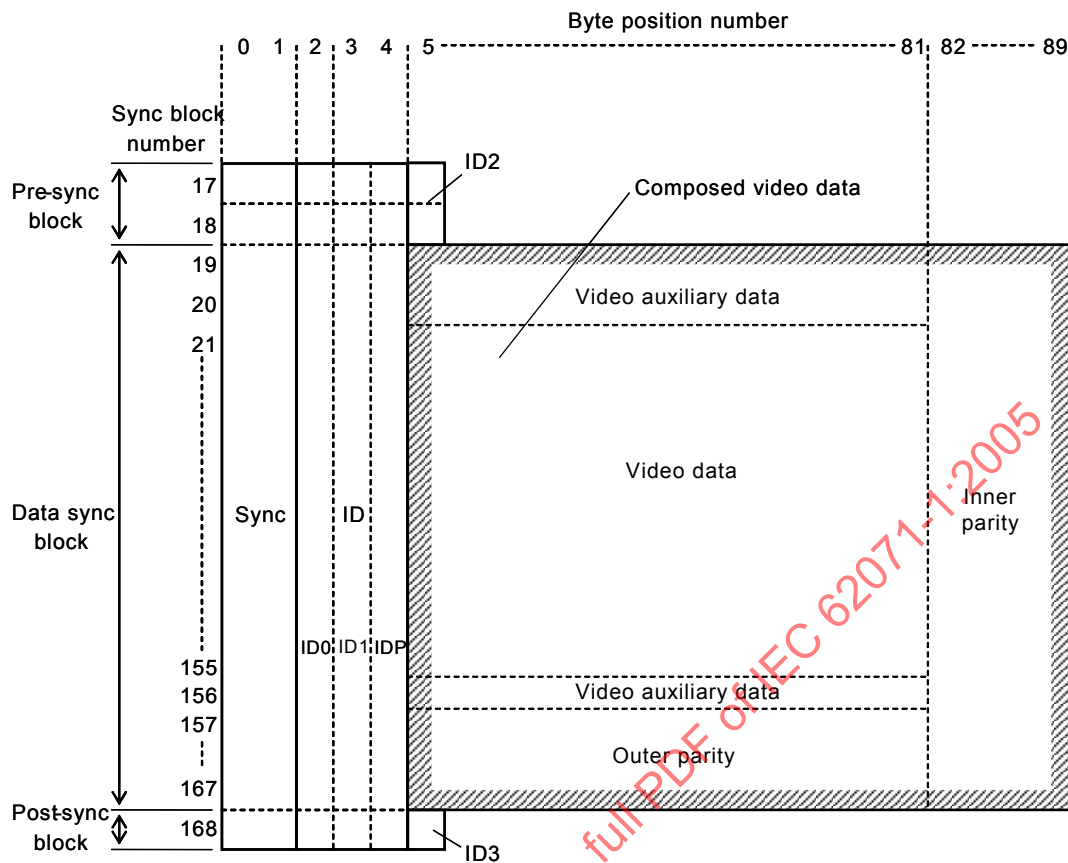

IEC 1883/05

NOTE Sync in byte position 0 and 1 shows the position. It is 17 bit pattern as specified in 7.3.3.1.

Figure 26 – Structure of sync blocks in video sector

Table 30 – ID data in video sector

Bit position	Sync block number 17 to 18 and 157 to 168		Sync block number 19 to 156	
	ID0	ID1	ID0	ID1
b7	AP2 ₂	Syb ₇	Arb	Syb ₇
b6	AP2 ₁	Syb ₆	Arb	Syb ₆
b5	AP2 ₀	Syb ₅	Arb	Syb ₅
b4	Arb	Syb ₄	Arb	Syb ₄
b3	Trp ₃	Syb ₃	Trp ₃	Syb ₃
b2	Trp ₂	Syb ₂	Trp ₂	Syb ₂
b1	Trp ₁	Syb ₁	Trp ₁	Syb ₁
b0	Trp ₀	Syb ₀	Trp ₀	Syb ₀

– ID1

ID1 contains the sync block number defined as follows:

MSB				LSB			
Syb ₇	Syb ₆	Syb ₅	Syb ₄	Syb ₃	Syb ₂	Syb ₁	Syb ₀

The length of ID1 shall be 8 bits before modulation.

The sync block numbers shall be numbered from 17 to 168 as shown in Figure 26.

The length of the composed video data shall be 85 bytes before modulation.

Modulation shall be done together with ID1, IDP, and ID2 or ID3 or the first video data, and/or followed every 3 video data bytes as shown in Figure 16. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

– IDP

IDP shall be the same as that given in 7.3.3.1. The length of the IDP shall be 8 bits before modulation.

The length of the composed video data shall be 85 bytes before modulation.

Modulation shall be done together with ID1, IDP, and ID2 or ID3 or the first video data, and/or followed every three video data bytes as shown in Figure 16. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

Table 31 – Video application ID

Video application ID			Format type
AP2 ₂	AP2 ₁	AP2 ₀	
0	0	0	Not used
0	0	1	D-7
0	1	0	Reserved
0	1	1	
1	0	0	
1	0	1	
1	1	0	
1	1	1	Not used

7.4.3.3 Additional ID (ID2, ID3)

Byte position number 5 of pre-sync blocks (ID2) shall be set to F0_h before modulation. Byte position number 5 of post-sync block (ID3) shall be set to FF_h before modulation.

7.4.3.4 Composed video data

Composed video data contains the video data, video auxiliary data, inner error code, and outer error code as shown in Figure 26.

The composed video data length shall be 85 bytes. By including the last two bytes of ID, the length of the composed video data shall be 87 bytes, divisible into 3 byte-length sections for additional processing as described below.

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

7.4.3.5 Video post-amble

The video post-amble shall be the same as the audio preamble described in 7.3.2 except for the length.

The length of the video post-amble shall be 925 bits as recorded on tape.

7.5 Subcode sector


7.5.1 Structure

The subcode sector contains the following elements:

- subcode preamble;
- subcode sync block;
- subcode postamble.

Figure 27 shows the structure of a subcode sector.

The subcode data in data sync block are described in Clause 10. The subcode preamble and post-amble are described in 7.5.2 and 7.5.3.4 respectively. The subcode sync block is described in 7.5.3.

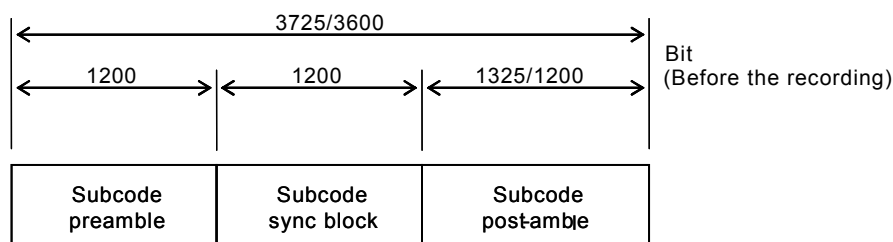

IEC 1884/05

NOTE This refers to 525/60 system / 625/50 system.

Figure 27 – Structure of subcode sector

7.5.2 Subcode preamble

The subcode preamble pattern shall be the same as the audio preamble pattern described in 7.3.2 except for the length.

The length of the subcode preamble shall be 1 200 bits as recorded on tape.

7.5.3 Subcode sync block

The subcode sync block contains 12 sync blocks. Each sync block contains sync of 2 bytes, ID of 3 bytes, and composed subcode data of 7 bytes. Figure 28 shows a structure of the subcode sync block.

7.5.3.1 Sync

Two types of sync patterns are defined as shown below:

MSB	LSB
Sync pattern D: 0 0 0 0 0 1 1 1 1 1 1 1 1 1 0 1	
Sync pattern E: 1 1 1 1 1 0 0 0 0 0 0 0 0 0 1 0	

A sync pattern to be recorded shall be chosen from the above two sequences according to the criteria described in 7.1.3.2. The length of the sync shall be 17 bits as recorded on tape.

7.5.3.2 ID

The ID consists of ID data (ID₀, ID₁) of 2 bytes and ID parity (IDP) of 1 byte. ID data consists of the FRID, sync block number (Syb₃, Syb₂, Syb₁, Syb₀), and/or subcode application ID (AP₃₂, AP₃₁, AP₃₀), and/or track application ID (APT₂, APT₁, APT₀).

Table 32 defines the contents of ID₀ and ID₁.


The subcode application ID shall be as defined in Table 33.

The length of the ID shall be as follows:

- ID₀: 8 bits;
- ID₁: 8 bits;
- IDP: 8 bits before modulation.

Modulation shall be applied together with ID1, IDP, and the first subcode data as shown in Figure 17. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

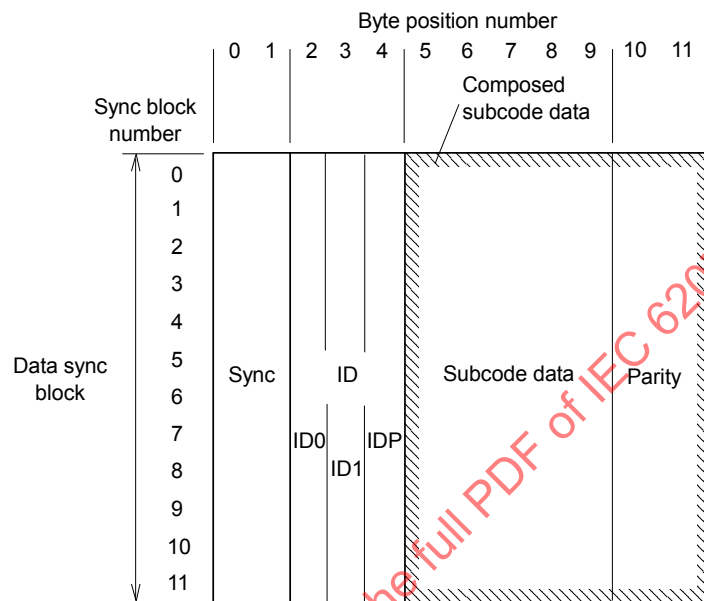

IEC 1885/05

NOTE Sync in byte position 0 and 1 shows the position. It is 17 bit pattern as specified in 7.5.3.1.

Figure 28 – Structure of sync blocks in subcode sector

Table 32 – ID data in subcode sector

Bit position	Sync block number 0 and 6		Sync block number 1 to 5 and 7 to 10		Sync block number 11	
	ID0	ID1	ID0	ID1	ID0	ID1
b7 (MSB)	FR	Arb	FR	Arb	FR	Arb
b6	AP3 ₂	Arb	Res	Arb	APT ₂	Arb
b5	AP3 ₁	Arb	Res	Arb	APT ₁	Arb
b4	AP3 ₀	Arb	Res	Arb	APT ₀	Arb
b3	Arb	Syb ₃	Arb	Syb ₃	Arb	Syb ₃
b2	Arb	Syb ₂	Arb	Syb ₂	Arb	Syb ₂
b1	Arb	Syb ₁	Arb	Syb ₁	Arb	Syb ₁
b0 (LSB)	Arb	Syb ₀	Arb	Syb ₀	Arb	Syb ₀

FR: the identification for the first or second half of each channel

1 = the first half of each channel

0 = the second half of each channel

Table 33 – Subcode application ID

Subcode application ID			Format
AP3 ₂	AP3 ₁	AP3 ₀	type
0	0	0	Not used
0	0	1	D-7
0	1	0	Reserved
0	1	1	
1	0	0	
1	0	1	
1	1	0	
1	1	1	Not used

IDP shall be the same as that in 7.3.3.2.

Modulation shall be applied together with ID1, IDP, and the first video data as shown in Figure 17. The following operations shall be performed:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

7.5.3.3 Composed subcode data

Composed subcode data structure consists of 12 subcode data blocks. Each subcode data block is composed of a 2-byte sync word, 3-byte ID, and 7 bytes of subcode data and parity. Three bytes consisting of ID1, IDP, and the first video data byte shall be processed through the following three operations:

- randomization: see 7.1.3.1;
- 24-25 modulation: see 7.1.3.2;
- pre-coding: see 7.1.3.3.

7.5.3.4 Subcode post-amble

The subcode post-amble shall be the same as the audio preamble described in 7.3.2 except for the length. The length of the subcode post-amble shall be 1 325 bits for the 525/60 system and 1 200 bits for the 625/50 system as recorded on tape.

7.6 Edit gap

The space between areas on a track is used to accommodate timing errors during editing. In an original recording the edit gap shall record concatenations of run patterns A and B defined as follows:

MSB	LSB
Run pattern A: 0 0 0 1 1 1 0 0 0 1 1 1 0 0 0 0 1 1 1 0 0 0 1 1	
Run pattern B: 1 1 1 0 0 0 1 1 1 0 0 0 1 1 1 1 1 0 0 0 1 1 1 0 0	

During an edit, the edit gap may be partially rewritten with the above concatenations provided that the preamble and post-amble of adjacent unedited areas are not overwritten.

Each preamble of areas except area 0 begins with run-up. Each postamble of areas except area 0 ends with the guard area. The run-up and the guard area shall be recorded concatenations of run patterns A and B.

Run patterns A and B are already modulated patterns under the rule of interleaved NRZI modulation. The choice of a run pattern between A and B depends on the restriction described in 7.1.3.2.

The length of the edit gaps shall be as follows:

- edit gap 1: 625 bits;
- edit gap 2: 700 bits;
- edit gap 3: 1550 bits as recorded on tape.

8 Audio processing

8.1 General

Audio data accompanying the video frame is processed simultaneously. The audio data shall be recorded on 10 consecutive tracks in each frame for the 525/60 system and 12 consecutive tracks in each frame for the 625/50 system for 25 Mb/s format. The audio data shall be recorded on 20 consecutive tracks in each frame for the 525/60 system and 24 consecutive tracks in each frame for the 625/50 system for 50 Mb/s format.

Each audio sector consists of audio data, audio auxiliary data (AAUX), and inner and outer parity data as shown in Figure 24. Audio data are shuffled within the audio data block of 77 columns x 9 rows prior to the addition of parity data. Each audio channel is identically but independently processed. Audio data are modulated by 24-25 code prior to recording. The total audio data processing sequence is shown in Figure 8.

8.2 Encoding mode

8.2.1 Source coding

Each audio input signal is sampled at 48 kHz, which is locked to the video signal, with 16-bit quantization. The system provides two-channel simultaneous recording for 25 Mb/s format and four-channel simultaneous recording for 50 Mb/s format.

Audio data is processed in frames. Each frame contains 1602 or 1600 audio samples (525/60 system) or 1920 audio samples (625/50 system) for an audio channel with associated status, user, and validity data. For the 525/60 system, the number of audio samples per frame shall follow the five-frame sequence as shown below:

1600, 1602, 1602, 1602, 1602 samples.

Audio recording capacity is 1620 samples per frame for the 525/60 system or 1944 samples per frame for the 625/50 system. The unused space at the end of each frame is filled with arbitrary values.

In addition, a number of control and user words are added to the data.

8.2.2 Emphasis

Audio encoding is carried out with the first order pre-emphasis of 50/15µs. For the analogue-input recording, emphasis should be off in the default state.

8.2.3 Audio error code

In the audio encoded data, 8000h shall be assigned as the audio error code to indicate the invalid audio sample. This code corresponds to the negative full-scale value in ordinary two's complement representation. When the encoded data include 8000h, it shall be converted to 8001h before audio processing and recording.

8.2.4 Relative audio-video timing

The audio frame duration equals the video frame period. An audio frame begins with the audio sample acquired within the duration of minus 50 samples to zero samples from the first pre-equalizing pulse of the vertical blanking period of the input video signal. The first pre-equalizing pulse means the beginning of line number 1 for the 525/60 system, and the middle of line number 623 for the 625/50 system.

8.3 Audio shuffling

The 16-bit audio data word is divided into two bytes; the upper byte which contains the MSB and the lower byte with the LSB, as shown in Figure 29. Audio data shall be shuffled over tracks and data-sync blocks within a frame. The data bytes are defined as D_n ($n = 0, 1, 2, \dots$) which is sampled at n th order within a frame and shuffled by each D_n unit.


The data shall be shuffled through a process as expressed by the following equations:

525/60 system:

Track number: $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 5$ for CH1
 $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 5 + 5$ for CH2
 $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 5 + 10$ for CH3
 $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 5 + 15$ for CH4
 Sync block number: $2 + 3 \times (n \bmod 3) + \text{INT}((n \bmod 45) / 15)$
 Byte position number: $10 + 2 \times \text{INT}(n/45)$ for the most significant byte
 $11 + 2 \times \text{INT}(n/45)$ for the least significant byte
 where $n = 0$ to 1619

625/50 system:

Track number: $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 6$ for CH1
 $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 6 + 6$ for CH2
 $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 6 + 12$ for CH3
 $(\text{INT}(n/3) + 2 \times (n \bmod 3)) \bmod 6 + 18$ for CH4
 Sync block number: $2 + 3 \times (n \bmod 3) + \text{INT}((n \bmod 54) / 18)$
 Byte position number: $10 + 2 \times \text{INT}(n/54)$ for the most significant byte
 $11 + 2 \times \text{INT}(n/54)$ for the least significant byte
 where $n = 0$ to 1943

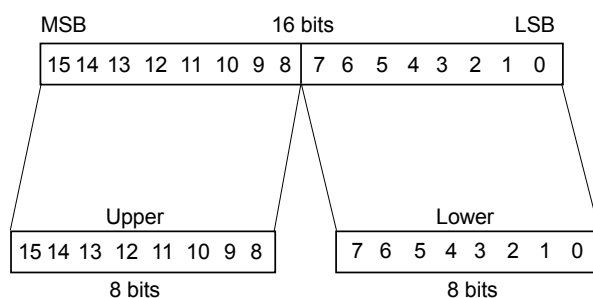

IEC 1886/05

Figure 29 – Sample to audio data bytes conversion

8.4 Audio auxiliary data (AAUX)

AAUX shall be added to the shuffled audio data as shown in Figure 24. The AAUX packet shall include a pack header, the data of the AAUX source pack (AS), and AAUX source control pack (ASC). The length of AS and ASC shall be a fixed value of 5 bytes as shown in Figure 30, which shows the AAUX pack arrangement for each track. One audio auxiliary data packet consists of nine sync blocks, numbers 2 through 10. Byte positions 5 through 9 of each sync block constitute the data, with byte position 5 the pack header. Therefore, there are nine packs in each track. Packs are numbered 0 to 8 from the entrance side of the audio sector in the order as shown in Figure 30. This number is called the audio pack number.

Table 34 shows the AAUX data which include the AAUX source pack and the AAUX source control pack.

AAUX has a reserved data area as shown below:


25 Mb/s format

- 525/60 system: 5 bytes x 7 packs x 10 tracks x 30 frames = 10500 bytes/s
- 625/50 system: 5 bytes x 7 packs x 12 tracks x 25 frames = 10500 bytes/s

50 Mb/s format

- 525/60 system: 5 bytes x 7 packs x 20 tracks x 30 frames = 21000 bytes/s
- 625/50 system: 5 bytes x 7 packs x 24 tracks x 25 frames = 21000 bytes/s

The reserved area shall be filled up by FFh.

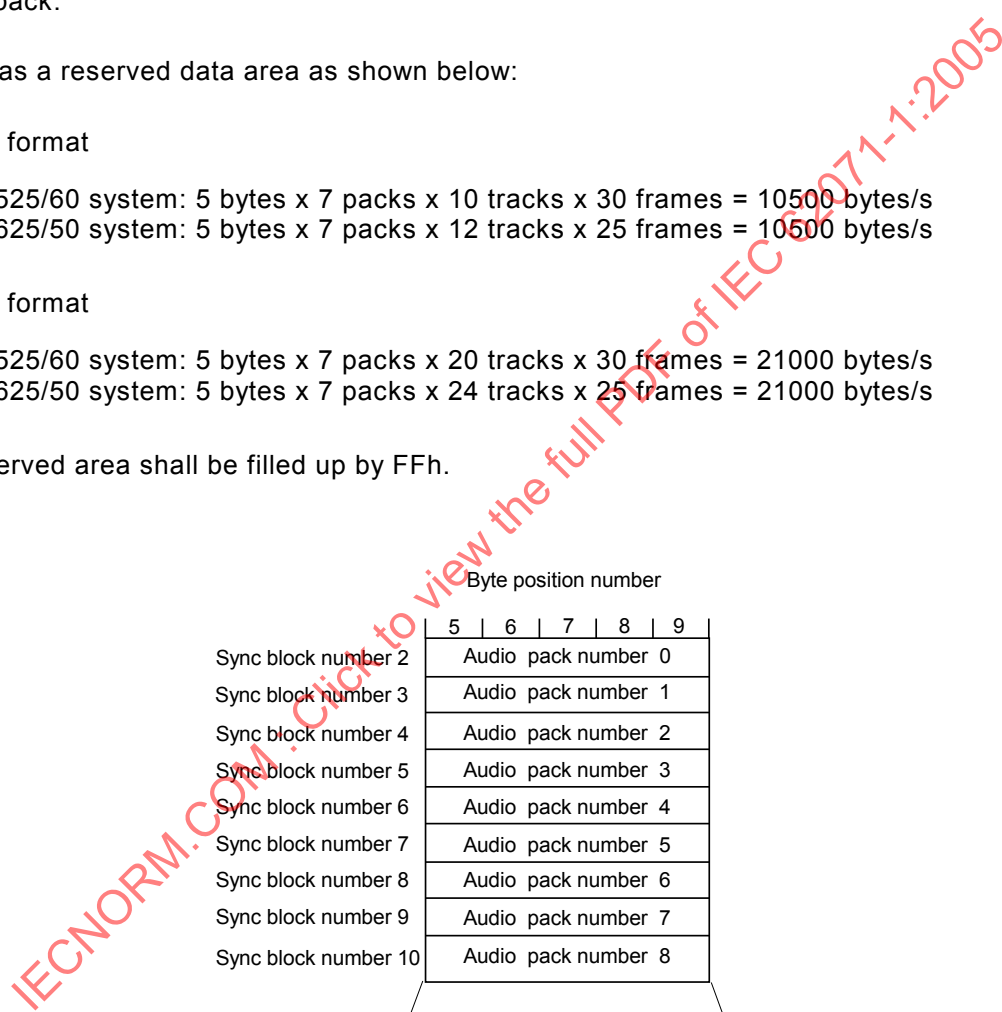

IEC 1887/05

Figure 30 – Arrangement of AAUX packs in audio auxiliary data

Table 34 – AAUX data

Audio pack number		AAUX data of a video frame
Track A	Track B	
3	0	AS
4	1	ASC
NOTE 1 AS: AAUX source pack (pack header = 50h) NOTE 2 ASC: AAUX source control pack (pack header = 51h) NOTE 3 Unused AAUX packs shall be reserved. NOTE 4 25 Mb/s format 525/60 system Track A: Track number 0, 2, 4, 6, 8 Track B: Track number 1, 3, 5, 7, 9 625/50 system Track A: Track number 0, 2, 4, 6, 8, 10 Track B: Track number 1, 3, 5, 7, 9, 11 50 Mb/s format 525/60 system Track A: Track number 0, 2, 4, 6, 8, 10, 12, 14, 16, 18 Track B: Track number 1, 3, 5, 7, 9, 11, 13, 15, 17, 19 625/50 system Track A: Track number 0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22 Track B: Track number 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23		

8.4.1 AAUX source pack (AS)

The AAUX source pack shall be configured as shown in Table 35.

Table 35 – Mapping of AAUX source pack

MSB								LSB	
PC0	0	1	0	1	0	0	0	0	
PC1	LF	Res	AF SIZE						
PC2	0	CHN		0	AUDIO MODE				
PC3	Res	Res	50/60	STYPE					
PC4	Arb	Res	SMP			QU			
NOTE Res means reservation for future use. Hereinafter, the default value of Res shall be set to 1.									

LF: Locked mode flag

Locking condition of audio sampling frequency with video signal

0 = Locked mode

1 = Reserved

AF SIZE: The number of audio samples per frame

0 1 0 1 0 0 b = 1 600 samples / frame (525/60 system)
 0 1 0 1 1 0 b = 1 602 samples / frame (525/60 system)
 0 1 1 0 0 0 b = 1 920 samples / frame (625/50 system)

CHN: The number of audio channels within an audio block

0 0 b = One channel per audio block
 Others = Reserved

The audio block is composed of five audio sectors in five consecutive tracks for the 525/60 system; six audio sectors in six consecutive tracks for the 625/50 system.

AUDIO MODE: The contents of the audio signal on each channel

0 0 0 0 b = CH1(CH3)
 0 0 0 1 b = CH2(CH4)
 1 1 1 1 b = Invalid audio data
 Others = Reserved

50/60:

0 = 60-field system
 1 = 50-field system

STYPE: STYPE defines audio blocks per video frame

0 0 0 0 0 b = 2 audio blocks
 0 0 0 1 0 b = 4 audio blocks
 Others = Reserved

SMP: Sampling frequency

0 0 0 b = 48 kHz
 Others = Reserved

QU: Quantization

0 0 0 b = 16 bits linear
 Others = Reserved

8.4.2 AAUX source control pack (ASC)

Table 36 shows a mapping of the AAUX source control pack.

Table 36 – Mapping of AAUX source control pack

	MSB				LSB			
PC0	0	1	0	1	0	0	0	1
PC1	EDIT ST		EDIT END		CGMS		EFC	
PC2	Arb	Arb	0	0	Res	Res	Res	Res
PC3	Res	0	Res	0	0	0	0	0
PC4	Arb	Res	Res	Res	Res	Res	Res	Res

EDIT ST: Start position of insert edit

0 0 b = Unedited portion
 0 1 b = Editing point without fading
 1 0 b = Editing point with fading
 1 1 b = Reserved

The duration of recording EDIT ST shall be one audio block period for each channel.

EDIT END: End position of insert edit

0 0 b = Unedited portion
 0 1 b = Editing point without fading
 1 0 b = Editing point with fading
 1 1 b = Reserved

The duration of recording EDIT END shall be one audio block period for each channel.

CGMS: Copy generation management system

0 0 b = Copy free
 Others = Reserved

EFC: Emphasis channel flag

0 0 b = Emphasis off
 0 1 b = Emphasis on
 Others = Reserved

EFC shall be set for each audio block.

8.5 Error correction code addition

Audio data are protected by inner and outer error correction codes.

8.5.1 Inner error correction code

The inner parity as shown in Figure 24 is defined as the codeword of an inner error correction code.

The inner error correction code is a (85, 77) Reed-Solomon code in GF(256) of which the field generator polynomial is:

$$X^8 + X^4 + X^3 + X^2 + 1$$

where X^i are place-keeping variables in GF(2), the binary field.

The generator polynomial of the code in GF(256) is:

$$g_{in}(X) = (X + 1)(X + \alpha)(X + \alpha^2)(X + \alpha^3)(X + \alpha^4)(X + \alpha^5)(X + \alpha^6)(X + \alpha^7)$$

where α is given by 2_h in GF(256).

The inner parity bytes $K_7, K_6, K_5, K_4, K_3, K_2, K_1, K_0$ as shown in Figure 31 are given by the equation:

$$K_7X^7 + K_6X^6 + K_5X^5 + K_4X^4 + K_3X^3 + K_2X^2 + K_1X + K_0$$

which is a residue of $X^8D(X)$ divided by $g_{in}(X)$, where the data polynomial $D(X)$ is defined as:

$$D(X) = D_{76}X^{76} + D_{75}X^{75} + \dots + D_2X^2 + D_1X + D_0$$

and the codeword polynomial is given by the following equation for every column of the byte position number 5 to 81:

$$D_{76}X^{84} + D_{75}X^{83} + \dots + D_1X^9 + D_0X^8 + K_7X^7 + K_6X^6 + \dots + K_1X + K_0$$

8.5.2 Outer error correction code

The outer parity as shown in Figure 24 is defined as a codeword of an outer error correction code.

The outer error correction code is a (14, 9) Reed-Solomon code in GF(256) of which the field generator polynomial is:

$$X^8 + X^4 + X^3 + X^2 + 1$$

where X^i are place-keeping variables in GF(2), the binary field.

The generator polynomial of the code in GF(256) is:

$$g_{aout}(X) = (X + 1)(X + \alpha)(X + \alpha^2)(X + \alpha^3)(X + \alpha^4)$$

where α is given by 2_h in GF(256).

The outer parity bytes K_4, K_3, K_2, K_1, K_0 as shown in Figure 32, are given by the equation:

$$K_4X^4 + K_3X^3 + K_2X^2 + K_1X + K_0$$

which is a residue of $X^5D(X)$ divided by $g_{aout}(X)$, where the data polynomial $D(X)$ is defined as:

$$D(X) = D_8X^8 + D_7X^7 + \dots + D_2X^2 + D_1X + D_0$$

and the codeword polynomial is given by the following equation:

$$D_8X^{13} + D_7X^{12} + \dots + D_1X^6 + D_0X^5 + K_4X^4 + K_3X^3 + \dots + K_1X + K_0$$


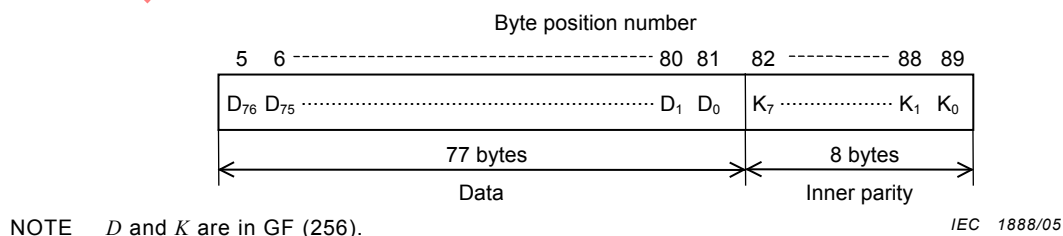


Figure 31 – Data and inner parity of a data sync block

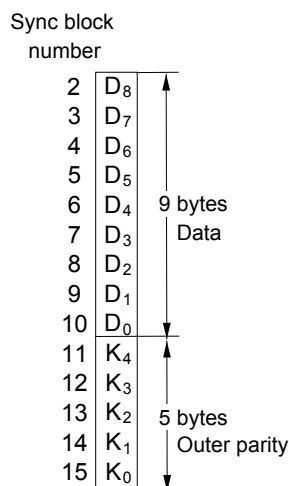

NOTE D and K are in GF (256).

IEC 1889/05

Figure 32 – Data and outer parity of a data sync block for audio sector

9 Video processing

9.1 General

The video signal is compressed in compliance with part 2 of this standard and formatted into a recording stream.

Video auxiliary data (VAUX) are multiplexed with the compressed video data, and the multiplexed data are processed in a product block of 77 columns by 138 rows. The data in the product block are protected with the error correction codes added to the product block. Prior to recording, 24-25 modulation is applied (see Figure 9).

9.2 Compressed macro block and data-sync block

A compressed macro block data is distributed to data-sync blocks as shown in Figure 33. A compressed macro block whose compressed macro block number is CM i, j, k is distributed to a data-sync block of sync block numbers as follows:

$27j + k + 21$ of track i where $i = 0, \dots, n-1$

$j = 0, \dots, 4$

$k = 0, \dots, 26$

$n = 10 \times m$ for 525/60 system

$n = 12 \times m$ for 625/50 system

$m = 1$ for 4:1:1 compression

$m = 2$ for 4:2:2 compression

Sync block number	Track number				
	0	1		$n-2$	$n-1$
156	VAUX	VAUX		VAUX	VAUX
155	CM 0, 4, 26	CM 1, 4, 26		CM $n-2$, 4, 26	CM $n-1$, 4, 26
154	CM 0, 4, 25	CM 1, 4, 25		CM $n-2$, 4, 25	CM $n-1$, 4, 25
:	:	:	:	:	:
:	:	:	:	:	:
:	:	:	:	:	:
129	CM 0, 4, 0	CM 1, 4, 0		CM $n-2$, 4, 0	CM $n-1$, 4, 0
128	CM 0, 3, 26	CM 1, 3, 26		CM $n-2$, 3, 26	CM $n-1$, 3, 26
127	CM 0, 3, 25	CM 1, 3, 25		CM $n-2$, 3, 25	CM $n-1$, 3, 25
:	:	:	:	:	:
:	:	:	:	:	:
:	:	:	:	:	:
102	CM 0, 3, 0	CM 1, 3, 0		CM $n-2$, 3, 0	CM $n-1$, 3, 0
101	CM 0, 2, 26	CM 1, 2, 26		CM $n-2$, 2, 26	CM $n-1$, 2, 26
100	CM 0, 2, 25	CM 1, 2, 25		CM $n-2$, 2, 25	CM $n-1$, 2, 25
:	:	:	:	:	:
:	:	:	:	:	:
:	:	:	:	:	:
75	CM 0, 2, 0	CM 1, 2, 0		CM $n-2$, 2, 0	CM $n-1$, 2, 0
74	CM 0, 1, 26	CM 1, 1, 26		CM $n-2$, 1, 26	CM $n-1$, 1, 26
73	CM 0, 1, 25	CM 1, 1, 25		CM $n-2$, 1, 25	CM $n-1$, 1, 25
:	:	:	:	:	:
:	:	:	:	:	:
:	:	:	:	:	:
48	CM 0, 1, 0	CM 1, 1, 0		CM $n-2$, 1, 0	CM $n-1$, 1, 0
47	CM 0, 0, 26	CM 1, 0, 26		CM $n-2$, 0, 26	CM $n-1$, 0, 26
46	CM 0, 0, 25	CM 1, 0, 25		CM $n-2$, 0, 25	CM $n-1$, 0, 25
:	:	:	:	:	:
:	:	:	:	:	:
:	:	:	:	:	:
21	CM 0, 0, 0	CM 1, 0, 0		CM $n-2$, 0, 0	CM $n-1$, 0, 0
20	VAUX	VAUX		VAUX	VAUX
19	VAUX	VAUX		VAUX	VAUX

NOTE $n = 10 \times m$ for 525/60 system

$n = 12 \times m$ for 625/50 system

$m = 1$ for 4:1:1 compression

$m = 2$ for 4:2:2 compression

IEC 1890/05

Figure 33 – Relation between the compressed macro block number and the data-sync block

9.3 Video auxiliary data (VAUX)

VAUX shall be added to the compressed video data as shown in Figure 26.

VAUX is formed using the fixed length pack structure. Figure 34 shows the VAUX pack arrangement of each track. There are 15 packs following the ID code of the data-sync block of which the sync block number is 19, 20, and 156. Therefore, there are 45 packs in each track, and there are two reserved bytes in each data-sync block for VAUX. The default value of the reserved bytes is FFh. VAUX packs are sequentially numbered from 0 to 44 from the entrance side of the video sector in the order as shown in Figure 34. This number is called the video pack number.

Table 37 shows the VAUX data. The VAUX source pack and VAUX source control pack include mandatory data for playback video signals and shall be recorded.

The other area of VAUX consists of 43 packs per track, 430 packs per frame for the 525/60 system and 516 packs per frame for the 625/50 system of 25 Mb/s format, and 860 packs per frame for the 525/60 system and 1032 packs per frame for the 625/50 system of 50 Mb/s format.

The reserved area of VAUX is as follows:


25 Mb/s format

- 525/60 system
(5 bytes x 43 packs + 6 bytes) x 10 tracks x 30 frames = 66300 bytes
- 625/50 system
(5 bytes x 43 packs + 6 bytes) x 12 tracks x 25 frames = 66300 bytes

50 Mb/s format

- 525/60 system
(5 bytes x 43 packs + 6 bytes) x 20 tracks x 30 frames = 132600 bytes
- 625/50 system
(5 bytes x 43 packs + 6 bytes) x 24 tracks x 25 frames = 132600 bytes

The reserved area shall be filled with FFh.

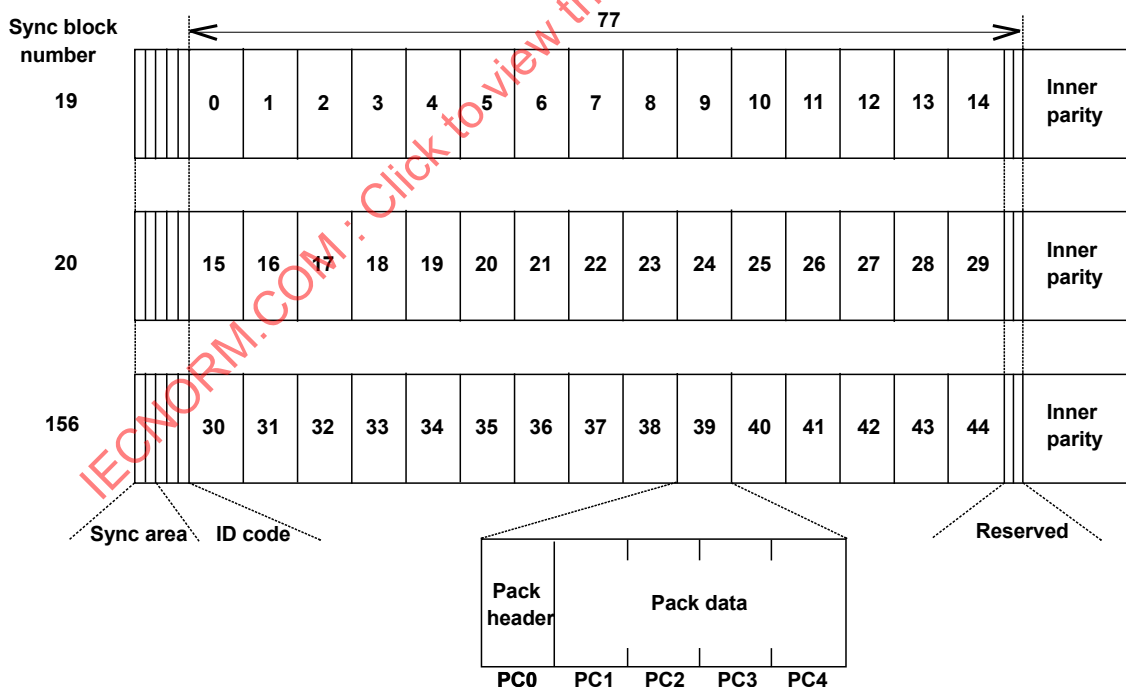

IEC 1891/05

Figure 34 – Arrangement

Table 37 – VAUX data

Video pack number		VAUX data of a video frame
Track A	Track B	
39	0	VS
40	1	VSC
NOTE 1 VS: VAUX source pack (pack header = 60h) NOTE 2 VSC: VAUX source control pack (pack header = 61h) NOTE 3 25 Mb/s format 525/60 system Track A: Track number 0, 2, 4, 6, 8 Track B: Track number 1, 3, 5, 7, 9 625/50 system Track A: Track number 0, 2, 4, 6, 8, 10 Track B: Track number 1, 3, 5, 7, 9, 11 50 Mb/s format 525/60 system Track A: Track number 0, 1, 4, 5, 8, 9, 12, 13, 16, 17 Track B: Track number 2, 3, 6, 7, 10, 11, 14, 15, 18, 19 625/50 system Track A: Track number 0, 1, 4, 5, 8, 9, 12, 13, 16, 17, 20, 21 Track B: Track number 2, 3, 6, 7, 10, 11, 14, 15, 18, 19, 22, 23		

9.3.1 VAUX source pack (VS)

Table 38 shows the mapping of the VAUX source pack.

Table 38 – Mapping of VAUX source pack

	MSB				LSB			
PC0	0	1	1	0	0	0	0	0
PC1	Res	Res	RR		Res	Res	Res	Res
PC2	Res	Res	Res	Res	Res	Res	Res	Res
PC3	Arb	Arb	50/60	STYPE				
PC4	Res	Res	Res	Res	Res	Res	Res	Res

50/60:

0 = 60 field system
1 = 50 field system

RR: Total recording rate

10b = 50 Mb/s
11b = 25 Mb/s

STYPE: STYPE defines a type of video signal.

STYPE	Type of video signal
0 0 0 0 0	4:1:1 compression (D-7, 25 Mb/s)
0 0 0 0 1 0 0 0 1 1	Reserved
0 0 1 0 0	4:2:2 compression (D-7, 50 Mb/s)
0 0 1 0 1 1 1 1 1 1	Reserved

9.3.2 VAUX source control pack (VSC)

Table 39 shows the mapping of the VAUX source control pack.

Table 39 – Mapping of VAUX source control pack

	MSB				LSB			
PC0	0	1	1	0	0	0	0	1
PC1	CGMS		0	0	Res	Res	Res	Res
PC2	Arb	Res	0	0	Res	DISP		
PC3	FF	FS	FC	Res	Res	Res	0	0
PC4	Res	Res	Res	Res	Res	Res	Res	Res

CGMS: Copy generation management system

0 0 b = Copy free
Others = Reserved

DISP: Display select mode

DISP	Aspect ratio and format	Position
0 0 0	4 : 3 full format	Not applicable
0 0 1	Reserved	Centre
0 1 0	16 : 9 full format (squeeze)	Not applicable
0 1 1 ⋮ 1 1 1	Reserved	

FF: Frame/Field flag

FF indicates whether two consecutive fields are delivered, or one field is repeated twice during one frame period.

0 = Only one of two fields is delivered twice.
1 = Both fields are delivered in order.

FS: First/Second flag

FS indicates a field which should be delivered during field one period.

0 = Field 2 is delivered.

1 = Field 1 is delivered.

FF	FS	Output field
1	1	Field 1 and field 2 are output in this order
1	0	Field 2 and field 1 are output in this order
0	1	Field 1 is output twice
0	0	Field 2 is output twice

FC: Frame change flag

FC indicates whether the picture of the current frame is repeated on the immediately previous frame.

0 = Same picture as the immediate previous frame

1 = Different picture from the immediate previous frame

9.4 Error correction code addition

Video data are protected by inner and outer error correction codes.

9.4.1 Inner error correction code

The inner parity as shown in Figure 26 is defined as the codeword of an inner error correction code. See 8.5.1 for the specification of this error correction code.

9.4.2 Outer error correction code

The outer parity as shown in Figure 26 is defined as a codeword of an outer error correction code.

The outer error correction code is a (149, 138) Reed-Solomon code in GF(256) of which the field generator polynomial is shown as:

$$X^8 + X^4 + X^3 + X^2 + 1$$

where X^i are place-keeping variables in GF(2), the binary field.

The generator polynomial of the code in GF(256) is:

$$g_{\text{vout}}(X) = (X + 1)(X + \alpha)(X + \alpha^2)(X + \alpha^3) \dots (X + \alpha^9)(X + \alpha^{10})$$

where α is given by 2h in GF(256).

The outer parity bytes, K_{10} , K_9 , K_8 , K_7 , K_6 , K_5 , K_4 , K_3 , K_2 , K_1 , K_0 as shown in Figure 35 are given by the equation:


$$K_{10}X^{10} + K_9X^9 + K_8X^8 + K_7X^7 + K_6X^6 + K_5X^5 + K_4X^4 + K_3X^3 + K_2X^2 + K_1X + K_0$$

which is a residue of $X^{11}D(X)$ divided by $g_{\text{vout}}(X)$, where the data polynomial $D(X)$ is defined as:

$$D(X) = D_{137}X^{137} + D_{136}X^{136} + \dots + D_2X^2 + D_1X + D_0$$

and the codeword polynomial is given by the following equation for every column of the byte position number 5 to 81:

$$D_{137}X^{148} + D_{136}X^{147} + \dots + D_1X^{12} + D_0X^{11} + K_{10}X^{10} + K_9X^9 + \dots + K_1X + K_0$$

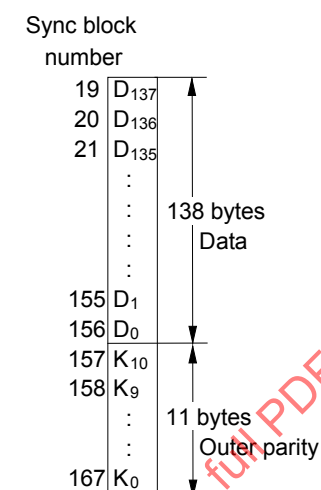

Where D and K are in GF(256)

IEC 1892/05

Figure 35 – Data and outer parity of a data sync block for video sector

10 Subcode processing

10.1 General

Subcode data is processed with every video frame. The subcode data shall be recorded 10 consecutive tracks in the frame for the 525/60 system and 12 consecutive tracks in the frame for the 625/50 system for 25 Mb/s format. The subcode data shall be recorded 20 consecutive tracks in the frame for the 525/60 system and 24 consecutive tracks in the frame for the 625/50 system for 50 Mb/s format.


Each subcode sector is a block of 5 columns by 12 rows as shown in Figure 28.

Subcode data with the addition of an error correction code (ECC) shall be modulated prior to recording. A typical block diagram of the subcode processing is shown in Figure 8.

10.2 Subcode data

As shown in Figure 36, each subcode row consists of a pack header byte and 4 data bytes. Within the 12 columns of the subcode data pack, a time code pack (TC) and a binary group pack (BG) are included as shown in Table 40.

The time and control code, which is internally generated or externally input, shall comply with SMPTE 12M.

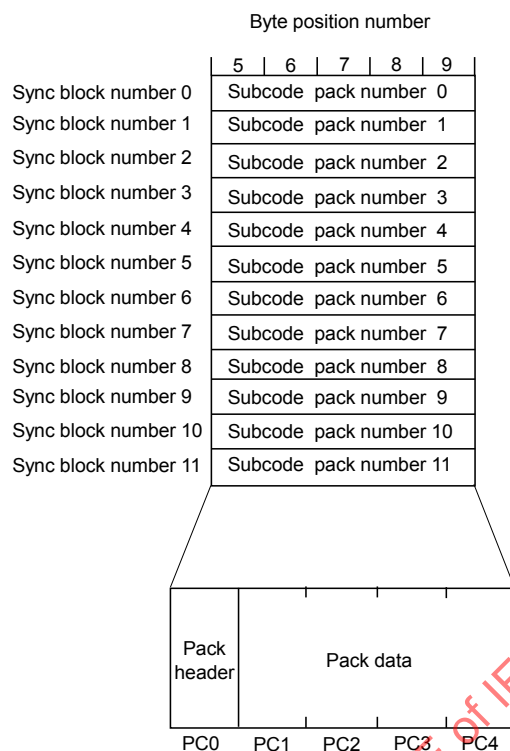

IEC 1893/05

Figure 36 – Arrangement of subcode data

Table 40 – Mapping of subcode pack

Subcode pack number	First half of a video frame	Second half of a video frame
0	Reserved	Reserved
1	Reserved	Reserved
2	Reserved	Reserved
3	TC	TC
4	BG	Reserved
5	TC	Reserved
6	Reserved	Reserved
7	Reserved	Reserved
8	Reserved	Reserved
9	TC	TC
10	BG	Reserved
11	TC	Reserved

TC: Time code pack (pack header = 13 h)

BG: Binary group pack (pack header = 14 h)

25 Mb/s format

525/60 system

The first half of a video frame: Track number 0, 1, ..., 4

The second half of a video frame: Track number 5, 6, ..., 9

625/50 system

The first half of a video frame: Track number 0, 1, ..., 5

The second half of a video frame: Track number 6, 7, ..., 11

50 Mb/s format**525/60 system**

The first half of a video frame: Track number 0, 1, ..., 9

The second half of a video frame: Track number 10, 11, ..., 19

625/50 system

The first half of a video frame: Track number 0, 1, ..., 11

The second half of a video frame: Track number 12, 13, ..., 23

The subcode data frame is provided with a reserved area as follows:

25 Mb/s format**525/60 system**

5 bytes x 16 packs x 5 track pairs x 30 frames = 12 000 bytes

625/50 system

5 bytes x 16 packs x 6 track pairs x 25 frames = 12 000 bytes

50 Mb/s format**525/60 system**

5 bytes x 16 packs x 10 track pairs x 30 frames = 24 000 bytes

625/50 system

5 bytes x 16 packs x 12 track pairs x 25 frames = 24 000 bytes

10.2.1 Time code pack (TC)

Table 41 shows the mapping of the time code pack.

Table 41 – Mapping of time code pack

525/60 system								
MSB					LSB			
PC0	0	0	0	1	0	0	1	1
PC1	CF	DF	Tens of frames		Units of frames			
PC2	PC	Tens of seconds			Units of seconds			
PC3	BGF0	Tens of minutes			Units of minutes			
PC4	BGF2	BGF1	Tens of hours		Units of hours			
625/50 system								
MSB					LSB			
PC0	0	0	0	1	0	0	1	1
PC1	CF	Arb	Tens of frames		Units of frames			
PC2	BGF0	Tens of seconds			Units of seconds			
PC3	BGF2	Tens of minutes			Units of minutes			
PC4	PC	BGF1	Tens of hours		Units of hours			
NOTE Detailed information is given in SMPTE 12M.								

DF: Drop frame flag

DF = 0: Nondrop frame time code

DF = 1: Drop frame time code

CF: Colour frame

CF = 0: Unsynchronized mode

CF = 1: Synchronized mode

PC: Biphase mark polarity correction

PC = 0: Even

PC = 1: Odd

BGF: Binary group flag

10.2.2 Binary group pack (BG)

Table 42 shows the mapping of a binary group pack.

Table 42 – Mapping of a binary group pack

	MSB				LSB			
PC0	0	0	0	1	0	1	0	0
PC1	Binary group 2				Binary group 1			
PC2	Binary group 4				Binary group 3			
PC3	Binary group 6				Binary group 5			
PC4	Binary group 8				Binary group 7			

10.3 Error correction code addition

Subcode error correction code shall be a (14, 10) Reed – Solomon code on GF (16) of which the field generator polynomial is:

$$X^4 + X + 1$$

where X^i are place-keeping variables in GF(2) the binary field.

The generator polynomial of the code in GF (16) is:

$$g_{\text{sub}} (X) = (X+1) (X + \alpha) (X + \alpha^2) (X + \alpha^3)$$

where α is given by 2h in GF (16).

The subcode parity bytes, K_3, K_2, K_1, K_0 , as shown in Figure 37, are given by the equation:

$$K_3 X^3 + K_2 X^2 + K_1 X + K_0$$

which is a residue of $X^4 D (X)$ divided by $g_{\text{sub}} (X)$, where the data polynomial $D (X)$ is defined as:

$$D (X) = D_9 X^9 + D_8 X^8 + \dots + D_2 X^2 + D_1 X + D_0$$

and the codeword polynomial is given by the equation:

$$D_9 X^{13} + D_8 X^{12} + \dots + D_1 X^5 + D_0 X^4 + K_3 X^3 + K_2 X^2 + K_1 X + K_0$$

		Byte position number						
		5	6	7	8	9	10	11
MSB	d 9,3	d 7,3	d 5,3	d 3,3	d 1,3	k 3,3	k 1,3	
	d 9,2	d 7,2	d 5,2	d 3,2	d 1,2	k 3,2	k 1,2	
	d 9,1	d 7,1	d 5,1	d 3,1	d 1,1	k 3,1	k 1,1	
	d 9,0	d 7,0	d 5,0	d 3,0	d 1,0	k 3,0	k 1,0	
	d 8,3	d 6,3	d 4,3	d 2,3	d 0,3	k 2,3	k 0,3	
LSB	d 8,2	d 6,2	d 4,2	d 2,2	d 0,2	k 2,2	k 0,2	
	d 8,1	d 6,1	d 4,1	d 2,1	d 0,1	k 2,1	k 0,1	
	d 8,0	d 6,0	d 4,0	d 2,0	d 0,0	k 2,0	k 0,0	
	Subcode data						Subcode parity	

IEC 1894/05

where $D_n = (d_{n,3} d_{n,2} d_{n,1} d_{n,0}) \quad 9 \geq n \geq 0$

$K_n = (k_{n,3} k_{n,2} k_{n,1} k_{n,0}) \quad 3 \geq n \geq 0$

Figure 37 – Bit assignment for subcode data and parity

11 Longitudinal tracks

11.1 Control track

11.1.1 Method of recording

The control track shall be recorded using the hysteresis (direct recording) method.

11.1.2 Servo reference pulse

The control track servo reference pulse, as recorded on the tape, shall be a series of pulses with a period of $673 \mu\text{s} \pm 10 \mu\text{s}$ as shown in Figure 38 (525/60 system) or $667 \mu\text{s} \pm 10 \mu\text{s}$ as shown in Figure 39 (625/50 system).

11.1.3 Flux polarity

The polarities of the recorded flux shall be as shown in Figure 3.

11.1.4 Flux level

The peak recorded flux level shall be greater than 500 nWb/m of the track width. The recording shall attenuate any previous recording by at least 25 dB.

11.1.5 Pulse width


The recorded pulses shall have periods of 4T, 5T, or 6T where T equals $667,3 \mu\text{s}$ nominal (525/60 system) or $666,7 \mu\text{s}$ nominal (625/50 system). The rise and fall times of the record current (10 % to 90 % points) shall be less than 150 μs .

11.1.6 Servo reference pulse timing

As shown in Figure 3, the servo reference pulse timing point and the helical track programme reference point shall be time coincident.

11.1.7 Colour frame indication


Information on the colour frame sequence, extracted from the input composite video signal, shall be encoded into the servo reference pulse as a pulse rise transmission point following the 6T or 4T duration pulse. Details are shown in Figure 38.

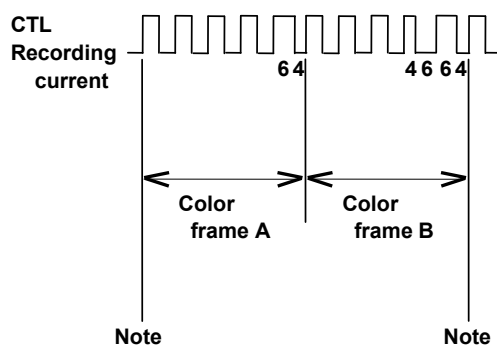

IEC 1895/05

NOTE Control track reference pulse position for measurement of P_1 .

Figure 38 – Recorded control code waveform timing (525/60 system)

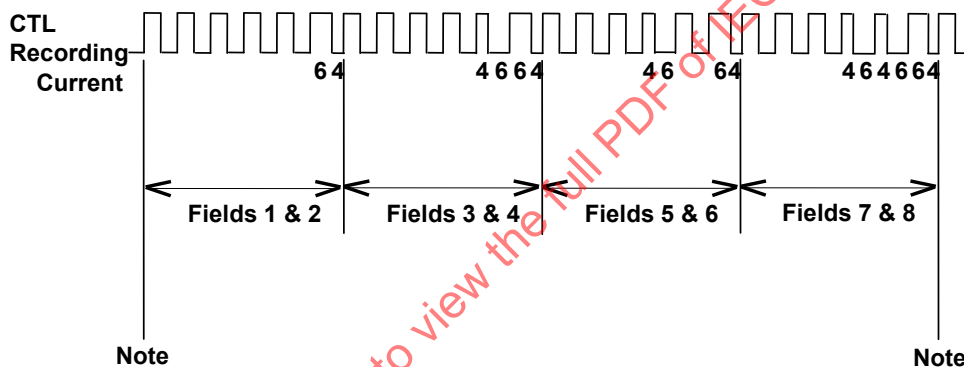

IEC 1896/05

NOTE Control track reference pulse position for measurement of P_1 .

Figure 39 – Recorded control code waveform timing (625/50 system)

11.2 Cue track

11.2.1 Method of recording

The signals shall be recorded using the anhysteresis (AC bias) method.

11.2.2 Flux level

The recorded reference audio level shall correspond to an r.m.s. magnetic short-circuit flux level of $23 \text{ nWb/m} \pm 3 \text{ nWb/m}$ of track width at 1 000 Hz.

11.2.3 Relative timing

Cue information shall be recorded on the tape at a point referenced to the associated video information as defined by dimension P_2 of Figure 3 and Table 1 (525/60 system) or Table 2 (625/50 system).

Annex A
(normative)

Tape tension


The value measured with a tension monitor on the entrance side of the scanner may vary among manufacturers, but would typically be $0,09 \text{ N} \pm 0,02 \text{ N}$.

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

Annex B (normative)

Track pattern during insert editing

A guard band of 3 μm (nominal) at editing points only is shown in Figures B.1 and B.2

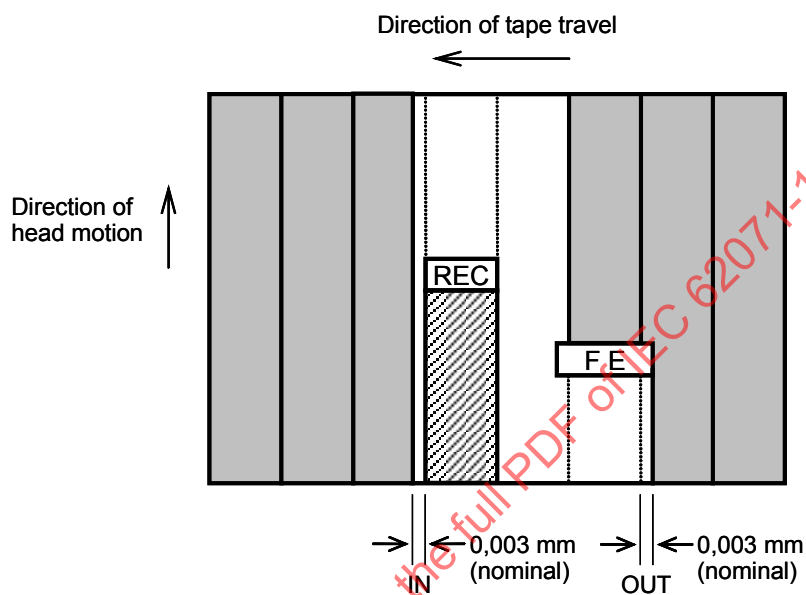


IEC 1897/05

NOTE 1 REC is a recording head.

NOTE 2 FE is a flying erase head.

Figure B.1 – Typical track pattern during insert editing for 25 Mb/s format

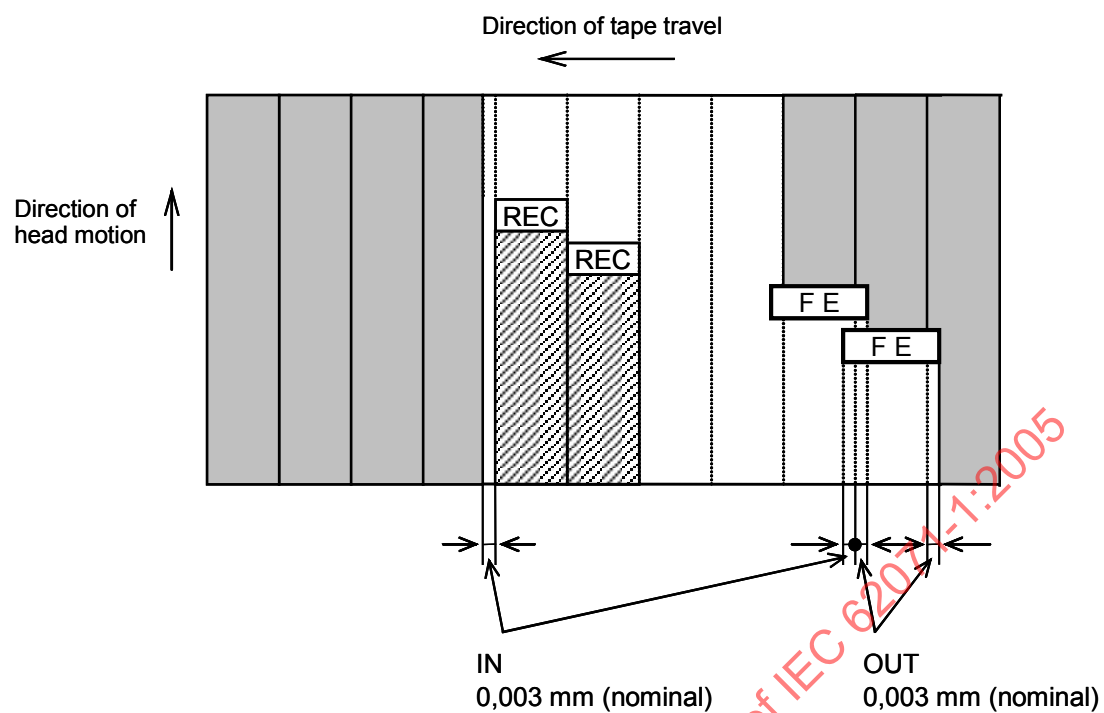

NOTE 1 REC is a recording head.

NOTE 2 FE is a flying erase head.

IEC 1898/05

Figure B.2 – Typical track pattern during insert editing for 50 Mb/s format

Annex C (normative)

Cross-tape track measurement technique

The cross-tape track measuring technique utilizes the fact that all tracks of a helical-scan video recording, recorded by the same head at constant tape speed, have the same longitudinal track pitch, the same track angle, and the same track curvature.


From a ferrofluid development, measurements are made of the actual track positions and the distance between a minimum of 300 control track pitches. All measurements shall be made under the environmental conditions described in 4.1 except that the measurements are made without tape tension (see Table C.1). The tape is then mathematically stretched to account for tape tension (see Figure C.1). The theoretical track position is calculated from the corrected longitudinal track pitch and the theoretical track angle. The track location error is calculated as the difference between the theoretical track position and the actual track position (see Table C.1 and Figure C.2).

Track location error, which shall be expressed by the error for the centre of the tracks, includes track angle errors, track straightness errors, and track pitch errors. The starting point for calculations and measurements is, for example, the cross point of the centre of the track containing the programme reference point and the line along the measurement path in Figure C.4. The values for each eighth track are the errors for tolerance zone one. Shifting one track, the second tolerance zone can be measured. It is not necessary to measure all tracks; a suitable number can be 35 samples per zone. A plot of the track location error against the track number must be computed (see Figures C.2 and C.3). The peak-to-peak value shall lie within the tolerance zones specified in 5.4.

IECNORM.COM : Click to view the full text of IEC 62071-1:2005

Table C.1 – Nomenclature and calculation of track location error

Y_0	Programme area reference (basic)	0,615
θ	Track angle (basic)	9,1784 °
T	Tension	0,09 N
E	Young's modulus	8 000 N/mm ² for 8,8 µm tape
A	Cross-sectional area	Thickness × width
CTM	Distance of n control track pitches without tape tension	
CTM'	Distance of n control track pitches with tape tension	$CTM' = CTM(1 + T/(A \times E))$
λ	Longitudinal track pitch	$\lambda = CTM'/n$
i	Track number, $i = 0$ for track containing reference point	
Y_i	Measured position of track i at the recorded pattern	
ΔY	Cross-section track pitch	$\Delta Y = l \times \tan \theta$
Y_{it}	Theoretical position of track i at the recorded pattern	$Y_{it} = Y_0 + i \times \Delta Y$
l	Track pitch	$l = \lambda \times \sin \theta$
TLE	Track location error	$TLE = Y_i - Y_{it}$
Z	Tolerance zone for 25 Mb/s format	$Z1 = 0,003 \text{ mm}$ $Z2 = 0,005 \text{ mm}$
	Tolerance zone for 50 Mb/s format	$Z1 = 0,005 \text{ mm}$ $Z2 = 0,003 \text{ mm}$ $Z3 = 0,005 \text{ mm}$ $Z4 = 0,005 \text{ mm}$
NOTE For the tolerance zone of 25 Mb/s format, $Z1: i = \dots -2, 0, +2, +4, \dots$ $Z2: i = \dots -1, +1, +3, +5, \dots$ For the tolerance zone of 50 Mb/s format, $Z1: i = \dots -4, 0, +4, +8, \dots$ $Z2: i = \dots -3, 1, +5, +9, \dots$ $Z3: i = \dots -2, 2, +6, +10, \dots$ $Z4: i = \dots -1, 3, +7, +11, \dots$		

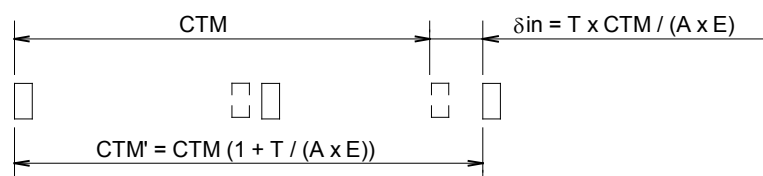

IEC 1899/05

Figure C.1 – Correction factors (actual tape speed, tension)

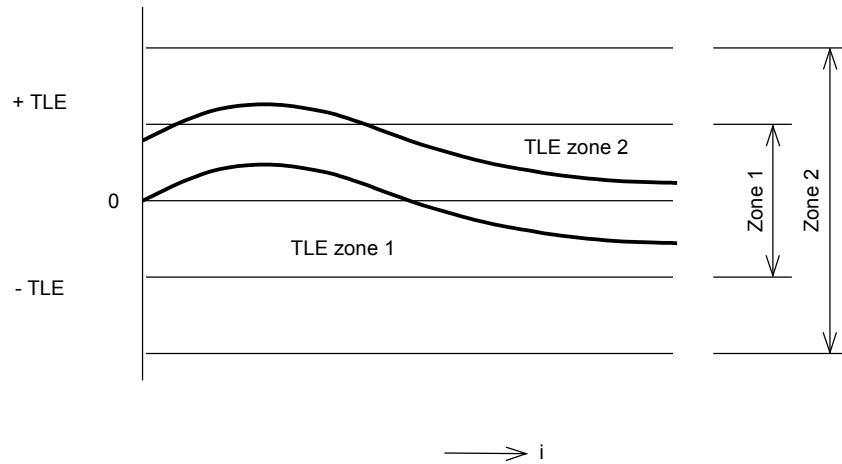


Figure C.2 – Track location error plot for 25 Mb/s format (example)


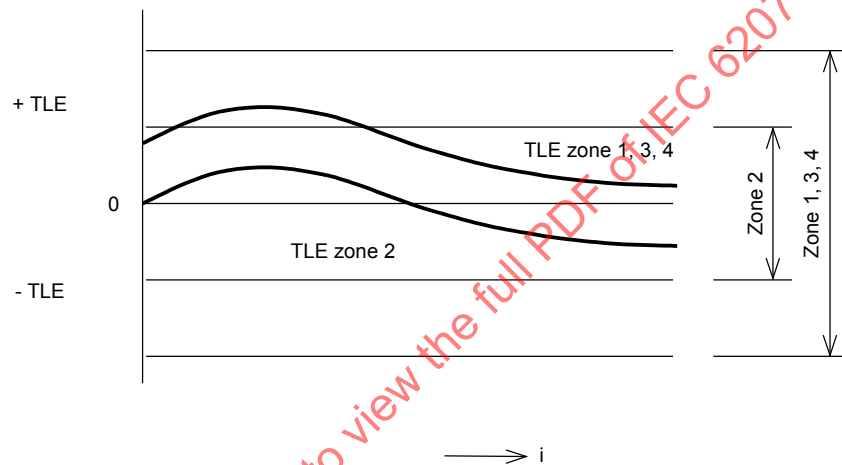


Figure C.3 – Track location error plot for 50 Mb/s format (example)

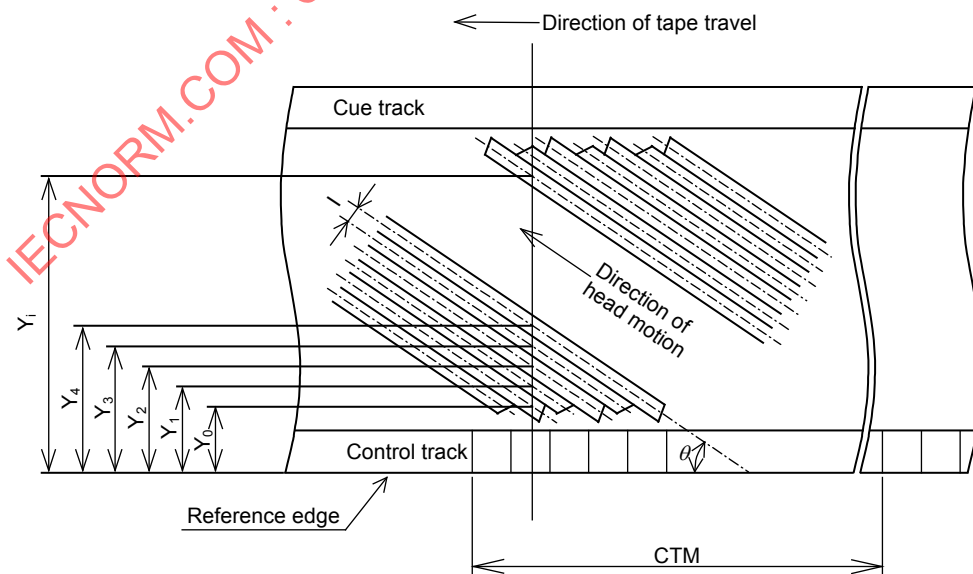

NOTE The same head must be used for Y_i measurement (i.e. every 8th track).

CTM is the distance of n control track pitches ($n = 300$ minimum).

IEC 1902/05

Figure C.4 – Cross-tape measurement technique

Annex D (normative)

Frequency characteristics of F_0 track

The recommended frequency characteristics of the F_0 track shall be defined as follows:

$$[(N1+N2)/2] - [(NL+NH)/2] > 5 \text{ [dB]}$$


f_{WL} is defined as $f_c - f_b/4000$

f_{WH} is defined as $f_c + f_b/4000$

NL is defined as amplitude at the f_{WL}

NH is defined as amplitude at the f_{WH}

f_c means a notch frequency f_1 or f_2

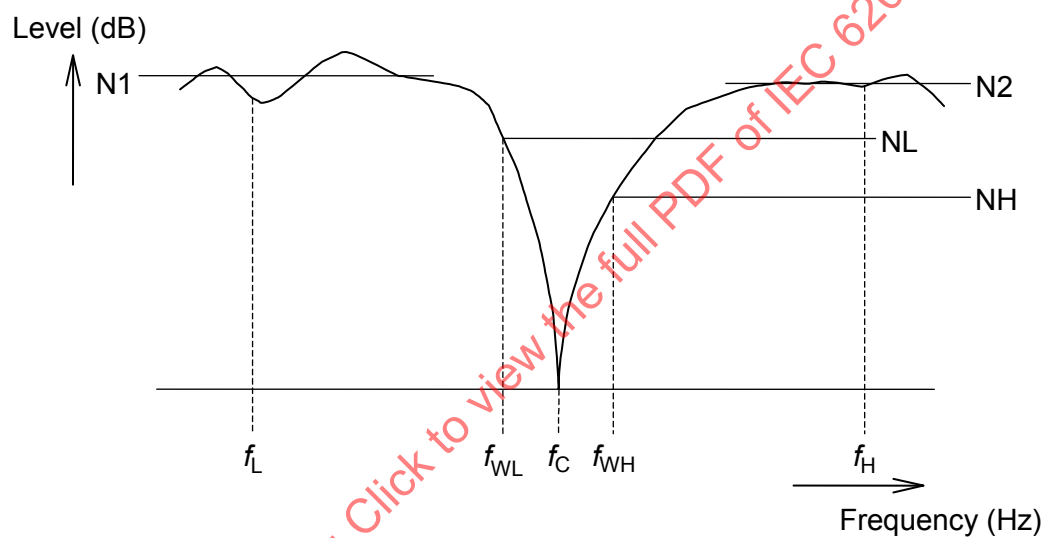

IEC 1903/05

Figure D.1 – Frequency characteristics of F_0 track

Annex E (informative)

Relationship between tape length and recording time

Table F.1 shows the relationship between tape length and recording time for M, L and EL cassette.


Table E.1 – Tape length and recording time

Cassette size	Tape thickness (µm)	Tape length (m)	Recording time (min.)	
			25 Mb/s	50 Mb/s
M	8,8	27	12	6
		51	24	12
		70	33	16
		96	46	23
		137	66	33
L	8,8	72	34	17
		137	66	33
		194	94	47
		259	126	63
EL	6,7	377	184	92

Annex F (informative)

Block diagram of D-7 recorder

Figure C.1 shows the relationship between the VTR specification (this part) and other parts defining the D-7 recorder.

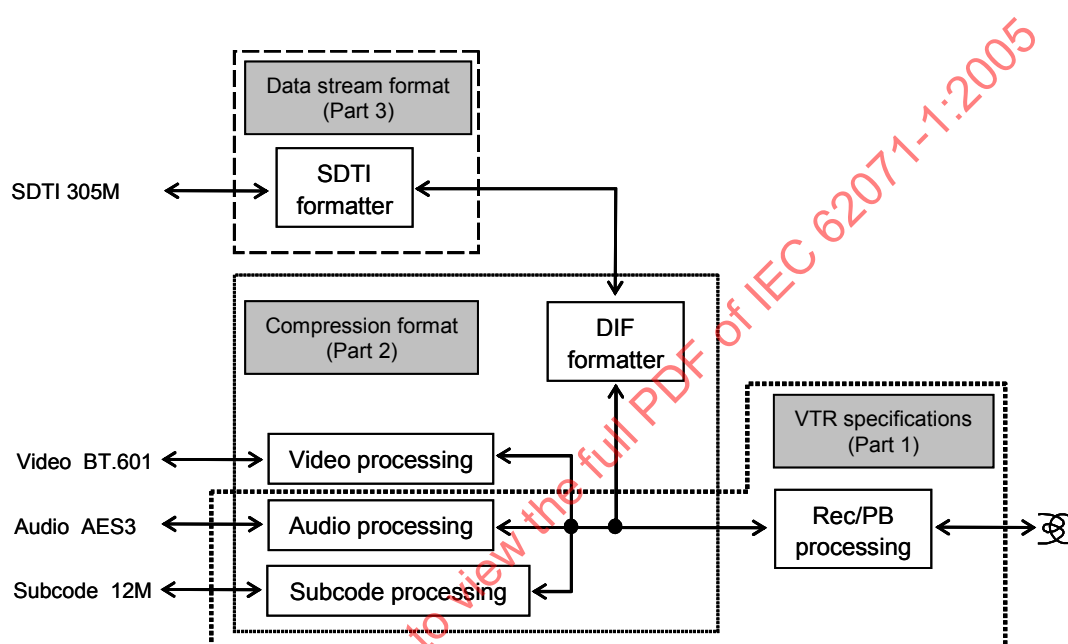

IEC 1904/05

Figure F.1 – Block diagram of D-7 recorder

Bibliography

IEC 60735:1991, *Measuring methods for video tape properties*

IEC 61834-1:1998, *Recording – Helical-scan digital video cassette recording system using 6,35 mm magnetic tape for consumer use (525-60, 625-50, 1125-60 and 1250-50 systems) – Part 1: General specifications*

ISO 2110:1989, *Information technology – Data communication – 25-Pole DTE/DCE interface connector and contact number assignments*

ITU-R BT.470-7 :2005, *Conventional television systems*

ITU-T Recommendation J.17, *Pre-emphasis used on sound-programme circuits*

SMPTE 125M:1995, *Television – Component Video Signal 4:2:2 – Bit-Parallel Digital Interface*

SMPTE 307M: 2002, *Television Digital Recording – 6.35-mm Type D-7 Component Format – Tape Cassette*

SMPTE RP 155: 1997, *Audio Levels for Digital Audio Records on Digital Television Tape Recorders*

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

SOMMAIRE

AVANT-PROPOS	98
1 Domaine d'application	100
2 Références normatives	100
3 Symboles et abréviations	101
4 Environnement et conditions d'essai	102
4.1 Environnement	102
4.2 Bande de référence	102
4.3 Bandes d'étalonnage	102
5 Bande	102
5.1 Substrat	102
5.2 Largeur	102
5.3 Fluctuations de la largeur	103
5.4 Rectitude du bord de référence	103
5.5 Épaisseur de la bande	103
5.6 Transmissivité	103
5.7 Force d'élongation élastique limite	103
5.8 Couche magnétique	103
5.9 Force coercitive de la couche	103
6 Enregistrements hélicoïdaux	103
6.1 Vitesse de la bande	103
6.2 Secteurs	103
6.3 Emplacements et dimensions de l'enregistrement	104
6.4 Zones de tolérances des pistes hélicoïdales enregistrées	104
6.5 Emplacements relatifs des informations enregistrées	104
6.6 Azimut d'entrefer	114
7 Données des pistes de programme	118
7.1 Généralités	118
7.2 Secteur d'information de piste initiale (ITI)	138
7.3 Secteur audio	149
7.4 Secteur vidéo	155
7.5 Secteur de sous-code	159
7.6 Intervalle de montage	163
8 Traitement audio	163
8.1 Généralités	163
8.2 Mode de codage	164
8.3 Brassage audio	164
8.4 Données audio auxiliaires (AAUX)	165
8.5 Ajout de code de correction d'erreurs	169
9 Traitement vidéo	172
9.1 Généralités	172
9.2 Macrobloc compressé et bloc de synchronisation des données	172
9.3 Données vidéo auxiliaires (VAUX)	173
9.4 Ajout de code de correction d'erreurs	177
10 Traitement de sous-code	179

10.1 Généralités.....	179
10.2 Données de sous-code.....	179
10.3 Ajout de code de correction d'erreurs	183
11 Pistes longitudinales.....	184
11.1 Piste d'asservissement.....	184
11.2 Piste d'ordres	186
Annexe A (normative) Tension de bande.....	187
Annexe B (normative) Disposition des pistes pendant le montage.....	188
Annexe C (normative) Technique de mesure de piste en travers de la bande.....	190
Annexe D (normative) Caractéristiques de fréquence de la piste F_0	194
Annexe E (informative) Relation entre la longueur de bande et le temps d'enregistrement.....	195
Annexe F (informative) Schéma par blocs d'un enregistreur D-7	196
Bibliographie.....	197
Figure 1 – Emplacements et dimensions des pistes enregistrées du format à 25 Mb/s	106
Figure 2 – Emplacements et dimensions des pistes enregistrées du format à 50 Mb/s	107
Figure 3 – Emplacement des enregistrements de pistes d'ordres et d'asservissement	108
Figure 4 – Emplacements et dimensions des zones de tolérance de l'enregistrement de la piste hélicoïdale du format à 25 Mb/s	112
Figure 5 – Emplacements et dimensions des zones de tolérance de l'enregistrement de la piste hélicoïdale du format à 50 Mb/s	113
Figure 6 – Configuration possible du dispositif de balayage et enroulement de la bande du format à 25 Mb/s	117
Figure 7 – Configuration possible du dispositif de balayage et enroulement de la bande du format à 50 Mb/s	118
Figure 8 – Configuration possible de système d'enregistrement avec port d'interface numérique (informative).....	120
Figure 9 – Répartition des secteurs sur la piste hélicoïdale.....	121
Figure 10 – Trames et pistes (système 625/50 du format à 25 Mb/s).....	121
Figure 11 – Trames et pistes (système 625/50 du format à 25 Mb/s).....	122
Figure 12 – Trame et pistes (système 525/50 du format à 50 Mb/s)	123
Figure 13 – Trame et pistes (système 625/50 du format à 50 Mb/s)	123
Figure 14 – Caractéristiques de fréquence des pistes	129
Figure 15 – Modulation pour le secteur audio.....	131
Figure 16 – Modulation pour le secteur vidéo.....	133
Figure 17 – Modulation pour le secteur de sous-code	135
Figure 18 – Schéma possible pour le traitement des signaux	136
Figure 19 – Suite de bits avant la modulation NRZI entrelacée	138
Figure 20 – Précodage.....	138
Figure 21 – Structure du secteur ITI.....	139
Figure 22 – Structure du bloc de synchronisation de la zone TIA	146
Figure 23 – Structure d'un secteur audio.....	150
Figure 24 – Structure des blocs de synchronisation dans le secteur audio	151

Figure 25 – Structure du secteur vidéo	156
Figure 26 – Structure des blocs de synchronisation dans le secteur vidéo	157
Figure 27 – Structure du secteur de sous-code	160
Figure 28 – Structure des blocs de synchronisation dans le secteur de sous-code	161
Figure 29 – Échantillon pour la conversion des octets de données audio	165
Figure 30 – Disposition des paquets AAUX dans les données audio auxiliaires	167
Figure 31 – Données et parité interne d'un bloc de synchronisation des données	171
Figure 32 – Données et parité externe d'un bloc de synchronisation des données pour le secteur audio	171
Figure 33 – Relation entre le numéro du macrobloc compressé et le bloc de synchronisation de données	173
Figure 34 – Disposition	175
Figure 35 – Données et parité externe d'un bloc de synchronisation de données pour le secteur vidéo	179
Figure 36 – Disposition des données de sous-code	181
Figure 37 – Attribution de bits pour les données et la parité de sous-code	184
Figure 38 – Synchronisation de la forme d'onde du code d'asservissement (système 525/60)	185
Figure 39 – Synchronisation de la forme d'onde du code d'asservissement (système 625/50)	186
Figure B.1 – Disposition type des pistes pendant le montage pour le format à 25 Mb/s	188
Figure B.2 – Disposition type des pistes pendant le montage pour le format à 50 Mb/s	189
Figure C.1 – Facteurs de correction (vitesse réelle de la bande, tension)	191
Figure C.2 – Représentation graphique de l'erreur d'emplacement de la piste pour le format à 25 Mb/s (exemple)	192
Figure C.3 – Représentation graphique de l'erreur d'emplacement de la piste pour le format à 50 Mb/s (exemple)	192
Figure C.4 – Technique de mesure en travers de la bande	193
Figure D.1 – Caractéristiques de fréquence de la piste F_0	194
Figure F.1 – Schéma par blocs d'un enregistreur D-7	196
Tableau 1 – Emplacements et dimensions de l'enregistrement (système 525/50 du format à 25 Mb/s)	108
Tableau 2 – Emplacements et dimensions de l'enregistrement (système 625/50 du format à 25 Mb/s)	109
Tableau 3 – Emplacements et dimensions de l'enregistrement (système 525/50 du format à 50 Mb/s)	110
Tableau 4 – Emplacements et dimensions de l'enregistrement (système 625/50 du format à 50 Mb/s)	111
Tableau 5 – Paramètres pour une conception possible du dispositif de balayage du format à 25 Mb/s	115
Tableau 6 – Paramètres pour une conception possible du dispositif de balayage du format à 50 Mb/s	115
Tableau 7 – Informations de trame et d'asservissement (système 525/50 du format à 25 Mb/s)	124
Tableau 8 – Informations de trame et d'asservissement (système 625/50 du format à 25 Mb/s)	125

Tableau 9 – Informations de trame et d'asservissement (système 525/50 du format à 50 Mb/s)	126
Tableau 10 – Informations de trame et d'asservissement (système 625/50 du format à 50 Mb/s)	127
Tableau 11 – Suite de bits du préambule ITI pour l'information d'asservissement F_0	140
Tableau 12 – Suite de bits du préambule ITI pour l'information d'asservissement F_1	141
Tableau 13 – Suite de bits du préambule ITI pour l'information d'asservissement F_2	142
Tableau 14 – Suite de bits du début de la zone de synchronisation (SSA) pour l'information d'asservissement F_0	143
Tableau 15 – Suite de bits du début de la zone de synchronisation (SSA) pour l'information d'asservissement F_1	144
Tableau 16 – Suite de bits du début de la zone de synchronisation (SSA) pour l'information d'asservissement F_2	145
Tableau 17 – ID d'application des informations de piste	146
Tableau 18 – Trame pilote	146
Tableau 19 – Suite de bits de la zone TIA pour l'information d'asservissement F_0	147
Tableau 20 – Suite de bits de la zone TIA pour l'information d'asservissement F_1	147
Tableau 21 – Suite de bits de la zone TIA pour l'information d'asservissement F_2	147
Tableau 22 – Suite de bits du postambule ITI pour l'information d'asservissement F_0	148
Tableau 23 – Suite de bits du postambule ITI pour l'information d'asservissement F_1	148
Tableau 24 – Suite de bits du postambule ITI pour l'information d'asservissement F_2	148
Tableau 25 – ID0 dans le secteur audio	151
Tableau 26 – ID d'application audio	152
Tableau 27 – Numéro de paire de piste pour le format à 25 Mb/s	152
Tableau 28 – Numéro de paire de piste pour le format à 50 Mb/s	153
Tableau 29 – Attribution de bits des mots codes d'ID	154
Tableau 30 – Données d'ID dans le secteur vidéo	158
Tableau 31 – ID d'application vidéo	159
Tableau 32 – Données d'ID dans le secteur de sous-code	162
Tableau 33 – ID d'application de sous-code	162
Tableau 34 – Données AAUX	167
Tableau 35 – Correspondance d'un paquet source AAUX	168
Tableau 36 – Correspondance d'un paquet d'asservissement de source AAUX	169
Tableau 37 – Données VAUX	175
Tableau 38 – Correspondance d'un paquet de source VAUX	175
Tableau 39 – Correspondance d'un paquet d'asservissement de source VAUX	176
Tableau 40 – Correspondance du paquet de sous-code	181
Tableau 41 – Correspondance d'un paquet de code temporel	182
Tableau 42 – Correspondance d'un paquet de groupe binaire	183
Tableau C.1 – Nomenclature et calcul de l'erreur d'emplacement de la piste	191
Tableau E.1 – Longueur de bande et temps d'enregistrement	195

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

SYSTÈME DE MAGNÉTOSCOPE NUMÉRIQUE À CASSETTE À BALAYAGE HÉLICOÏDAL À SIGNAL COMPRESSÉ UTILISANT UNE BANDE MAGNÉTIQUE DE 6,35 mm – FORMAT D-7 –

Partie 1: Spécifications VTR

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (CEI) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de la CEI). La CEI a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, la CEI – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de la CEI"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec la CEI, participent également aux travaux. La CEI collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de la CEI concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de la CEI intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de la CEI se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de la CEI. Tous les efforts raisonnables sont entrepris afin que la CEI s'assure de l'exactitude du contenu technique de ses publications; la CEI ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de la CEI s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de la CEI dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de la CEI et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) La CEI n'a prévu aucune procédure de marquage valant indication d'approbation et n'engage pas sa responsabilité pour les équipements déclarés conformes à une de ses Publications.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à la CEI, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de la CEI, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de la CEI ou de toute autre Publication de la CEI, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de la CEI peuvent faire l'objet de droits de propriété intellectuelle ou de droits analogues. La CEI ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de propriété et de ne pas avoir signalé leur existence.

La Norme internationale CEI 62071-1 a été établie par le domaine technique 6: Supports de stockage de débit de données supérieur, structures des données et matériel, du comité d'étude 100 de la CEI: Systèmes et appareils audio, vidéo et multimédia.

La présente version bilingue (2012-11) correspond à la version anglaise monolingue publiée en 2005-10.

Le texte anglais de cette norme est issu des documents 100/900/CDV et 100/984/RVC.

Le rapport de vote 100/984/RVC donne toute information sur le vote ayant abouti à l'approbation de cette norme.

La version française n'a pas été soumise au vote.

Cette publication a été rédigée selon les Directives ISO/CEI, Partie 2.

La CEI 62071 comprend les parties suivantes, sous le titre général *Système de magnétoscope numérique à cassette à balayage hélicoïdal à signal compressé utilisant une bande magnétique de 6,35 mm – Format D-7* :

Partie 1: Spécifications VTR

Partie 2: Format de compression

Partie 3: Format du flux de données

La présente Partie 1 décrit les spécifications du magnétoscope à savoir, la bande, la magnétisation, l'enregistrement hélicoïdal, la méthode de modulation et les données du système de base pour des données vidéo compressées.

La Partie 2 décrit les spécifications du processus de codage et le format de données pour les systèmes 525i et 625i.

La Partie 3 décrit les spécifications de transmission du flux de données vidéo et audio compressées DV sur une interface numérique série à 270 Mb/s et 360 Mb/s.

Le comité a décidé que le contenu de cette publication ne sera pas modifié avant la date de maintenance indiquée sur le site web de la CEI sous "<http://webstore.iec.ch>" dans les données relatives à la publication recherchée. A cette date, la publication sera

- reconduite;
- supprimée;
- remplacée par une édition révisée, ou
- amendée.

SYSTÈME DE MAGNÉSCOPE NUMÉRIQUE À CASSETTE À BALAYAGE HÉLICOÏDAL À SIGNAL COMPRESSÉ UTILISANT UNE BANDE MAGNÉTIQUE DE 6,35 mm – FORMAT D-7 –

Partie 1: Spécifications VTR

1 Domaine d'application

La présente partie de la CEI 62071 spécifie le contenu, le format et la méthode d'enregistrement des blocs de données contenant des données vidéo, audio et des données associées formant les enregistrements hélicoïdaux sur les bandes de 6,35 mm contenues dans des cassettes, comme cela est spécifié dans le SMPTE 307M.

De plus, cette norme spécifie le contenu, le format et la méthode d'enregistrement des pistes longitudinales d'ordres et d'asservissement.

Une voie vidéo et deux voies audio indépendantes sont enregistrées en format numérique pour les magnétoscopes à 25 Mb/s et une voie vidéo et quatre voies audio indépendantes pour les magnétoscopes à 50 Mb/s. Chacune de ces voies est conçue pour pouvoir être montée de manière indépendante.

La voie vidéo enregistre et reproduit un signal de télévision à composante pour le système 525 lignes avec une fréquence de trame de 29,97 Hz (appelé ci-après système 525/60) et pour le système 625 lignes avec une fréquence de trame de 25,00 Hz (appelé ci-après système 625/50).

Le signal numérique est compressé avant l'enregistrement pour donner une suite d'éléments binaires DV à 25 MB/s avec échantillonnage 4:1:1 ou une suite d'éléments binaires DV à 50 Mb/s avec échantillonnage 4:2:2.

La présente norme inclut le processus requis pour décoder la suite d'éléments binaires DV à 25 Mb/s et la suite d'éléments binaires DV à 50 Mb/s en sortie vidéo, audio et de données.

2 Références normatives

Les documents de référence suivants sont indispensables pour l'application du présent document. Pour les références datées, seule l'édition citée s'applique. Pour les références non datées, la dernière édition du document de référence (y compris les éventuels amendements) s'applique.

AES3:2003, *AES Recommended Practice for Digital Audio Engineering - Serial transmission format for two-channel linearly represented digital audio data*

SMPTE 12M:1999, *Television, Audio and Film – Time and Control Code*

SMPTE 259M:1997, *Television - 10-Bit 4:2:2 Component and 4fsc NTSC Composite Digital Signals – Serial Digital Interface*

3 Symboles et abréviations

AAUX	Données audio auxiliaires
AP1	ID d'application audio
AP2	ID d'application vidéo
AP3	ID d'application de sous-code
APT	ID d'application de piste
Arb	Arbitraire
AS	Paquet source AAUX
ASC	Paquet d'asservissement de source AAUX
B/W	Drapeau noir et blanc
CGMS	Système de gestion de génération de copies
DBN	Numéro de bloc DIF
DCT	Transformée en cosinus discret
DIF	Interface numérique
DSF	Drapeau de séquence DIF
ECC	Code de correction d'erreurs
EFC	Drapeau de voie d'accentuation
EOB	Fin de bloc
ID	Identification
IDP	Parité d'ID
ITI	Information de piste initiale
LF	Drapeau de mode verrouillé
PF	Trame pilote
QNO	Numéro de quantification
QU	Quantification.
Res	Réservé pour usage ultérieur
SMP	Fréquence d'échantillonnage
SSA	Début de la zone de synchronisation
SSYB	Numéro de bloc de synchronisation de sous-code
STA	État du macrobloc compressé
Syb	Numéro de bloc de synchronisation:
TF	Drapeau de transmission
TIA	Zone d'information de piste
Trp	Numéro de paire de piste
VAUX	Données vidéo auxiliaires
VLC	Codage de longueur variable
VS	Paquet de source VAUX
VSC	Paquet d'asservissement de source VAUX
VSM	Magnétomètre d'échantillon de vibration

4 Environnement et conditions d'essai

4.1 Environnement

Les essais et les mesures effectués sur le système pour vérifier les exigences de la présente norme doivent être réalisés dans les conditions suivantes:

- Température: $20\text{ °C} \pm 1\text{ °C}$
- Humidité relative: $(50 \pm 2)\%$
- Pression barométrique de 86 kPa à 106 kPa
- Conditionnement de la bande au moins 24 h
- Tension au centre de la bande $0,09\text{ N} \pm 0,02\text{ N}$ (voir Annexe A)

4.2 Bande de référence

Une bande magnétique vierge pour les enregistrements d'étalonnage doit être disponible auprès du détenteur du format ou d'une source agréée.

4.3 Bandes d'étalonnage

Les bandes d'étalonnage satisfaisant aux exigences de 4.3.1, 4.3.2, et de l'Article 5 doivent être disponibles auprès des fabricants produisant des magnétoscopes et des lecteurs pour télévision numérique conformes à la présente norme.

4.3.1 Emplacements et dimensions de l'enregistrement

Une bande d'étalonnage doit être fabriquée avec les tolérances données dans le Tableau 1 ou dans le Tableau 2 pour le format à 25 Mb/s ou dans le Tableau 3 ou dans le Tableau 4 pour le format à 50 Mb/s, mais ces tolérances étant réduites de 50 %.

4.3.2 Signaux d'étalonnage

Deux classes de signaux doivent être enregistrées sur la bande d'étalonnage:

- a) – Vidéo: Barres de couleur 100 / 0 / 100 / 0
- Audio: Signal à la fréquence de 1 kHz à 20 dB au-dessous du niveau maximal de chaque voie audio
- Ordres: Signal à la fréquence de 1 kHz et 6 kHz au niveau de référence de l'enregistrement analogique;
- b) Un signal de fréquence constante enregistrée (c'est-à-dire à la fréquence de Nyquist) pour l'alignement mécanique. Le niveau d'enregistrement doit être conforme à 7.1.4.3.

5 Bande

5.1 Substrat

Le matériau du substrat doit être du polyester ou un matériau équivalent.

5.2 Largeur

La largeur de la bande doit être de $6,350\text{ mm} \pm 0,005\text{ mm}$.

La bande, recouverte par une plaque de verre, est mesurée sans tension en au moins cinq points différents le long de la bande en utilisant un comparateur étalonné d'une précision de $0,001\text{ mm}$ ($1\text{ }\mu\text{m}$). La largeur de la bande doit correspondre à la spécification donnée ci-dessus quelle que soit la position de mesure.

5.3 Fluctuations de la largeur

Les fluctuations de la largeur de la bande ne doivent pas dépasser 5 µm crête à crête. La mesure de la fluctuation de la largeur de la bande doit être effectuée sur une longueur de bande de 900 mm. La valeur de la fluctuation de la largeur de la bande doit correspondre à la spécification donnée ci-dessus en dix points espacés de 900 mm.

5.4 Rectitude du bord de référence

La déviation maximale de la rectitude du bord de référence est de 6 µm crête à crête. La fluctuation de la rectitude du bord de référence est mesurée sur le bord d'une bande en mouvement guidée par trois guides en contact avec le même bord et espacés de 85 mm les uns des autres. Les mesures sont moyennées sur une longueur de 10 m et sont effectuées à 5 mm du point de milieu entre le premier et le deuxième guide en direction du premier guide.

5.5 Epaisseur de la bande

L'épaisseur totale de la bande doit être de $8,8 \begin{smallmatrix} 0 \\ -0,8 \end{smallmatrix} \mu\text{m}$ et $6,7 \begin{smallmatrix} 0 \\ -0,4 \end{smallmatrix} \mu\text{m}$.

NOTE Une bande ayant l'une ou l'autre épaisseur peut être utilisée pour les formats à 25 Mb/s ou 50 Mb/s.

5.6 Transmissivité

La transmissivité doit être inférieure à 5 %, pour des longueurs d'onde comprises entre 800 nm et 1 000 nm.

5.7 Force d'élongation élastique limite

La force d'élongation élastique limite doit être supérieure à 3 N. La force nécessaire pour produire une élongation de 0,2 % d'un échantillon d'essai de 1 000 mm avec une élongation tangentielle de 10 mm par minute doit être utilisée pour confirmer la force d'élongation élastique limite. La ligne débutant à une élongation de 0,2 % parallèle à la pente initiale tangentielle est tracée puis lue au point d'intersection de cette ligne avec la courbe des contraintes.

5.8 Couche magnétique

La couche magnétique de la bande doit être constituée d'un revêtement en particules métalliques ou d'un revêtement équivalent.

5.9 Force coercitive de la couche

La force coercitive de la couche doit être de la classe 2300 (approximativement 2 300 Oe/184 000 A/m), avec un champ appliqué de 10 000 Oe/800 000 A/m mesuré par un magnétomètre à échantillon vibrant.

6 Enregistrements hélicoïdaux

6.1 Vitesse de la bande

La vitesse de la bande pour le format à 25 Mb/s doit être de 33,8201 mm/s pour le système 525/60 et de 33,8539 mm/s pour le système 625/50. La vitesse de la bande pour le format à 50 Mb/s doit être de 67,6401 mm/s pour le système 525/60 et de 67,7077 mm/s pour le système 625/50. La tolérance doit être respectivement de $\pm 0,2 \%$.

6.2 Secteurs

Chaque piste enregistrée contient un secteur ITI, un secteur audio, un secteur vidéo et un secteur de sous-code.

6.3 Emplacements et dimensions de l'enregistrement

Les emplacements et les dimensions pour l'enregistrement continu du format à 25 MB/s doivent être comme cela est spécifié aux Figures 1 et 3 et au Tableau 1 (système 525/60) ou aux Figures 1 et 3 et au Tableau 2 (système 625/50). Lors de l'enregistrement, les emplacements des secteurs sur chaque piste hélicoïdale doivent être compris dans les tolérances spécifiées à la Figure 1 et au Tableau 1 (système 525/60) ou à la Figure 1 et au Tableau 2 (système 625/50).

L'emplacement et les dimensions pour l'enregistrement continu du format à 50 Mb/s doivent être comme cela est spécifié aux Figures 2 et 3 et au Tableau 3 (système 525/60) ou aux Figures 2 et 3 et au Tableau 4 (système 625/50). Lors de l'enregistrement, les emplacements des secteurs sur chaque piste hélicoïdale doivent être compris dans les tolérances spécifiées à la Figure 2 et au Tableau 3 (système 525/60) ou à la Figure 2 et au Tableau 4 (système 625/50).

Pour les dimensions spécifiées dans la présente norme, le bord de référence de la bande doit être le bord inférieur comme cela est indiqué aux Figure 1 et 2. La couche magnétique, pour le sens de défilement illustré aux Figures 1 et 2, est du côté de l'observateur.

Comme cela est indiqué aux Figures 1 et 2, cette norme tient compte d'une bande de garde nulle entre les pistes enregistrées, et la largeur nominale de la tête d'enregistrement doit être égale au pas de piste qui est de 18 μm . Il convient de choisir la configuration de la tête de balayage de façon que les largeurs des pistes enregistrées soient contenues dans les limites de 16 μm à 20 μm .

Le format exige l'effacement mobile pour l'enregistrement. En mode insertion pour le montage, cette norme donne une bande de garde de 3 $\mu\text{m} \pm 1,5 \mu\text{m}$ entre la piste enregistrée initialement et la piste insérée uniquement aux points de montage. Une configuration type des pistes pour le mode d'insertion de montage est indiquée aux Figures B.1 et B.2 de l'Annexe B.

6.4 Zones de tolérances des pistes hélicoïdales enregistrées

Dans le cas du format à 25 Mb/s, le centre de deux pistes consécutives commençant à la première piste de chaque trame vidéo doit être contenu dans la configuration des deux zones de tolérance établies à la Figure 4. Chaque zone est définie par deux lignes parallèles inclinées selon un angle nominal de $9,1784^\circ$ par rapport au bord de référence de la bande. Les lignes centrales de chaque zone doivent être séparées de 18,0 μm nominal. La largeur de la zone 1 doit être de 3 μm et la largeur de la zone 2 doit être de 5 μm . Ces zones sont établies pour contenir les erreurs d'angle de piste, de linéarité de piste et de tolérances du réglage vertical de tête (la technique de mesure est donnée à l'Annexe C).

Dans le cas du format à 50 Mb/s, le bord inférieur de quatre pistes consécutives commençant à la première piste de chaque trame vidéo doit être contenu dans la configuration des quatre zones de tolérance établies à la Figure 5. Chaque zone est définie par deux lignes parallèles inclinées selon un angle nominal de $9,1784^\circ$ par rapport au bord de référence de la bande. Les lignes centrales de chaque zone doivent être séparées de 18,0 μm nominal. La largeur de la zone 2 doit être de 3 μm et la largeur des zones 1, 3 et 4 doit être de 5 μm . Ces zones sont établies pour tenir compte des erreurs d'angle de piste, de linéarité de piste et de tolérance du réglage vertical de tête.

6.5 Emplacements relatifs des informations enregistrées


6.5.1 Emplacements relatifs des pistes longitudinales

Les pistes audio, vidéo, d'asservissement et d'ordres contenant des informations destinées à être simultanées doivent être positionnées comme indiqué aux Figures 1 à 3.

6.5.2 Point de référence de la zone de programme

Le point de référence de la zone de programme est déterminé par l'intersection d'une ligne parallèle au bord de référence de la bande à la distance Y_0 du bord de référence et de l'axe central de la piste 0 dans chaque secteur ITI (voir Figures 1 à 3).

La fin du préambule et le début de la zone SSA dans le secteur ITI doivent être enregistrés au point de référence de la zone de programme; la tolérance de dimension étant X_0 . Les emplacements sont indiqués aux Figures 1 à 3; les dimensions X_0 et Y_0 sont spécifiées aux Tableaux 1 à 4. La relation entre les secteurs et le contenu de chaque secteur est spécifiée à l'Article 7.

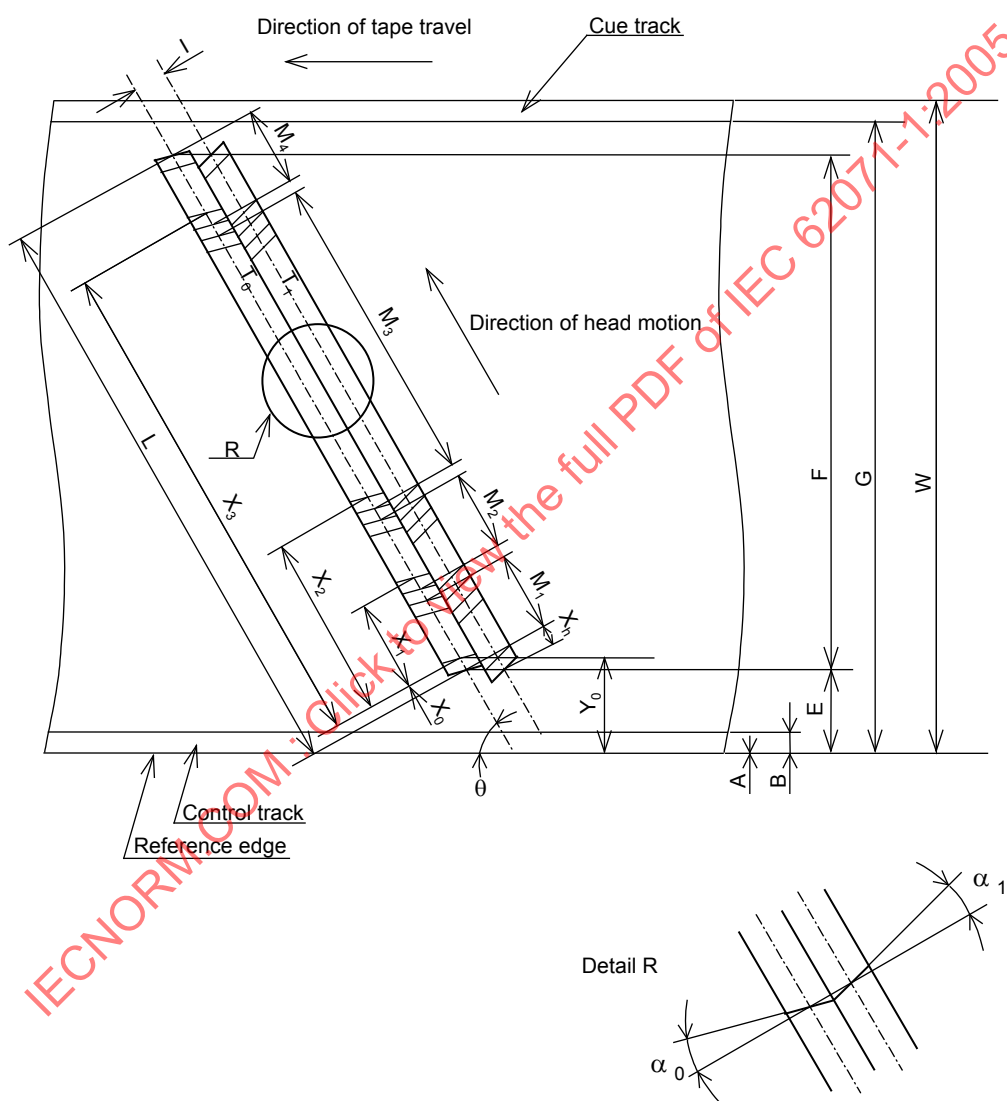

NOTE 1 M_1 est un secteur ITI.

NOTE 2 M_2 est un secteur audio.

NOTE 3 M_3 est un secteur vidéo.

NOTE 4 M_4 est un secteur de sous-code.


NOTE 5 Les pistes sont vues du côté de la couche magnétique.

NOTE 6 Les dimensions X_1 à X_3 sont déterminées par le point de référence du programme défini à la Figure 3.

Légende

Anglais	Français
Direction of tape travel	Direction de déplacement de la bande
Cue track	Piste d'ordres
Direction of head motion	Direction de déplacement de la tête
Control track	Piste d'asservissement
Reference edge	Bord de référence
Detail R	Détail R

Figure 1 – Emplacements et dimensions des pistes enregistrées du format à 25 Mb/s

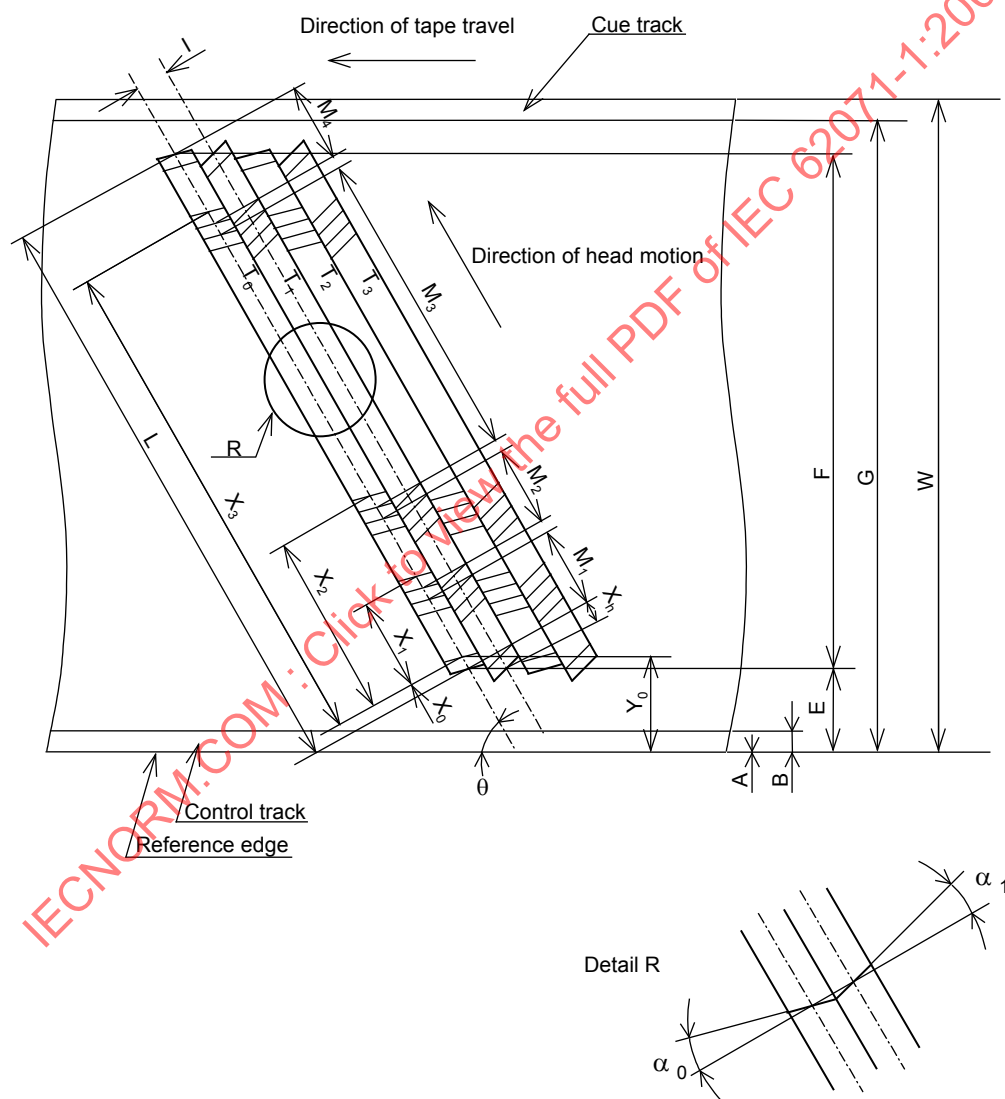

IEC 1859/05

NOTE 1 M_1 est un secteur ITI.

NOTE 2 M_2 est un secteur audio.

NOTE 3 M_3 est un secteur vidéo.


NOTE 4 M_4 est un secteur de sous-code.

NOTE 5 Les pistes sont vues du côté de la couche magnétique.

NOTE 6 Les dimensions X_1 à X_3 sont déterminées par le point de référence du programme défini à la Figure 3.

Légende

Anglais	Français
Direction of tape travel	Direction de déplacement de la bande
Cue track	Piste d'ordres
Direction of head motion	Direction de déplacement de la tête
Control track	Piste d'asservissement
Reference edge	Bord de référence
Detail R	Détail R

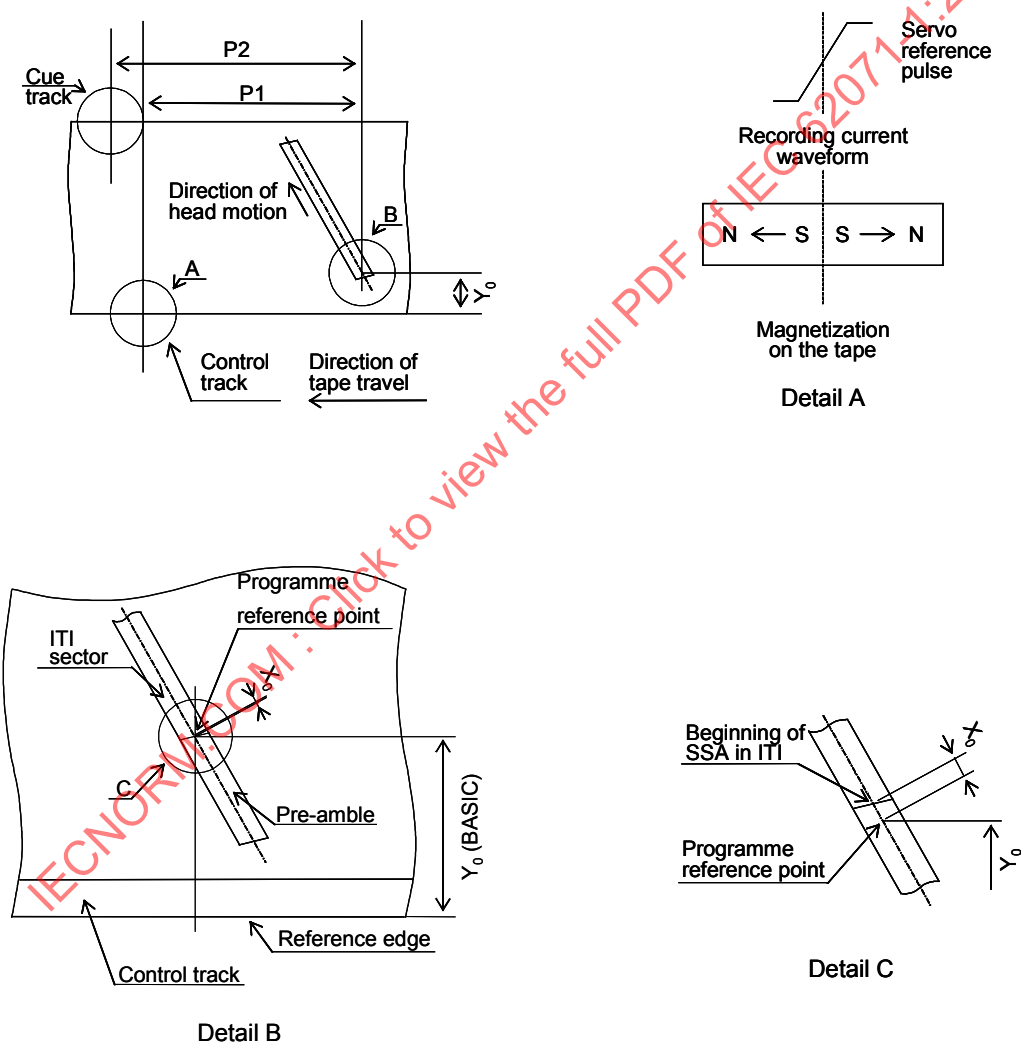Figure 2 – Emplacements et dimensions des pistes enregistrées du format à 50 Mb/s

IEC 1860/05

Légende

Anglais	Français
Cue track	Piste d'ordres
Direction of head motion	Direction de déplacement de la tête
Control track	Piste d'asservissement
Direction of tape travel	Direction de déplacement de la bande
Servo reference pulse	Impulsion de référence d'asservissement
Recording current waveform	Forme d'onde du courant d'enregistrement

Anglais	Français
Magnetization of the tape	Magnétisation de la bande
Program reference point	Point de référence du programme
ITI sector	Secteur ITI
Preamble	Préambule
Control track	Piste d'asservissement
Reference edge	Bord de référence
Y ₀ (BASIC)	Y ₀ (NOMINAL)
Program reference point	Point de référence du programme
Beginning of SSA in ITI	Début SSA dans ITI
Detail A	Détail A
Detail B	Détail B
Detail C	Détail C

Figure 3 – Emplacement des enregistrements de pistes d'ordres et d'asservissement

Tableau 1 – Emplacements et dimensions de l'enregistrement (système 525/60 du format à 25 Mb/s)

Dimensions en millimètres

Dimensions		Valeur nominale	Tolérance
<i>A</i>	Bord inférieur de la piste d'asservissement	0	De base
<i>B</i>	Bord supérieur de la piste d'asservissement	0,400	± 0,050
<i>E</i>	Bord inférieur de la zone de programme	0,56	Dérivé
<i>F</i>	Largeur de la zone de programme	5,24	Dérivé
<i>G</i>	Bord inférieur de la piste d'ordres	6,000	± 0,050
<i>I</i>	Pas de la piste hélicoïdale	0,018	Réf.
<i>L</i>	Longueur totale de la piste hélicoïdale	32,842	Dérivé
<i>M</i> ₁	Longueur du secteur ITI avec préambule et postambule	0,876	Dérivé
<i>M</i> ₂	Longueur du secteur audio avec préambule et postambule	2,810	Dérivé
<i>M</i> ₃	Longueur du secteur vidéo avec préambule et postambule	27,548	Dérivé
<i>M</i> ₄	Longueur du secteur de sous-code avec préambule et postambule	0,906	Dérivé
<i>P</i> ₁	Impulsion de référence de la piste d'asservissement jusqu'au point de référence du programme (voir Figure 3)	67,500	± 0,030
<i>P</i> ₂	Signal d'ordres, début du mot code d'ordres jusqu'au point de référence du programme (Voir Figure 3)	69,900	± 0,300
<i>W</i>	Largeur de bande	6,350	± 0,005
<i>X</i> ₀	Emplacement du début de la zone SSA dans le secteur ITI	0	± 0,050
<i>X</i> ₁	Emplacement du début des blocs de synchronisation des données audio	0,809	± 0,050
<i>X</i> ₂	Emplacement du début des blocs de synchronisation des données vidéo	3,790	± 0,050
<i>X</i> ₃	Emplacement du début des blocs de synchronisation des données de sous-code	31,885	± 0,050
<i>X</i> _h	Décalage de tête et tolérance en ligne	0,111	± 0,021
<i>Y</i> ₀	Point de référence de piste de programme	0,615	De base
θ	Angle de piste	9,178 4	De base
α_0	Angle d'azimut (piste 0)	19,97	± 0,150 °
α_1	Angle d'azimut (piste 1)	20,03	± 0,150 °

NOTE Il convient d'effectuer les mesures dans les conditions spécifiées en 4.1. Il convient de corriger les mesures pour tenir compte de la vitesse réelle de la bande (voir Figures C.1 et C.2).

**Tableau 2 – Emplacements et dimensions de l'enregistrement
(système 625/50 du format à 25 Mb/s)**

Dimensions en millimètres

Dimensions		Valeur nominale	Tolérance
A	Bord inférieur de la piste d'asservissement	0	De base
B	Bord supérieur de la piste d'asservissement	0,400	$\pm 0,050$
E	Bord inférieur de la zone de programme	0,56	Dérivé
F	Largeur de la zone de programme	5,24	Dérivé
G	Bord inférieur de la piste d'ordres	6,000	$\pm 0,050$
I	Pas de la piste hélicoïdale	0,018	Réf.
L	Longueur totale de la piste hélicoïdale	32,842	Dérivé
M_1	Longueur du secteur ITI avec préambule et postambule	0,877	Dérivé
M_2	Longueur du secteur audio avec préambule et postambule	2,813	Dérivé
M_3	Longueur du secteur vidéo avec préambule et postambule	27,576	Dérivé
M_4	Longueur du secteur de sous-code avec préambule et postambule	0,877	Dérivé
P_1	Impulsion de référence de la piste d'asservissement jusqu'au point de référence du programme (voir Figure 3)	67,500	$\pm 0,030$
P_2	Signal d'ordres, début du mot code d'ordres jusqu'au point de référence du programme (Voir Figure 3).	70,380	$\pm 0,300$
W	Largeur de bande	6,350	$\pm 0,005$
X_0	Emplacement du début de la zone SSA dans le secteur ITI	0	$\pm 0,050$
X_1	Emplacement du début des blocs de synchronisation des données audio	0,810	$\pm 0,050$
X_2	Emplacement du début des blocs de synchronisation des données vidéo	3,793	$\pm 0,050$
X_3	Emplacement du début des blocs de synchronisation des données de sous-code	31,917	$\pm 0,050$
X_h	Décalage de tête et tolérance en ligne	0,111	$\pm 0,021$
Y_0	Point de référence de piste de programme	0,615	De base
θ	Angle de piste	9,178 4°	De base
α_0	Angle d'azimut (piste 0)	19,97°	$\pm 0,150^\circ$
α_1	Angle d'azimut (piste 1)	20,03°	$\pm 0,150^\circ$

NOTE Il convient d'effectuer les mesures dans les conditions spécifiées en 4.1. Il convient de corriger les mesures pour tenir compte de la vitesse réelle de la bande (voir Figures C.1 et C.2).

**Tableau 3 – Emplacements et dimensions de l'enregistrement
(système 525/60 du format à 50 Mb/s)**

Dimensions en millimètres

Dimensions		Valeur nominale	Tolérance
A	Bord inférieur de la piste d'asservissement	0	De base
B	Bord supérieur de la piste d'asservissement	0,400	$\pm 0,050$
E	Bord inférieur de la zone de programme	0,56	Dérivé
F	Largeur de la zone de programme	5,24	Dérivé
G	Bord inférieur de la piste d'ordres	6,000	$\pm 0,050$
I	Pas de la piste hélicoïdale	0,018	Réf.
L	Longueur totale de la piste hélicoïdale	32,842	Dérivé
M_1	Longueur du secteur ITI avec préambule et postambule	0,876	Dérivé
M_2	Longueur du secteur audio avec préambule et postambule	2,810	Dérivé
M_3	Longueur du secteur vidéo avec préambule et postambule	27,548	Dérivé
M_4	Longueur du secteur de sous-code avec préambule et postambule	0,906	Dérivé
P_1	Impulsion de référence de la piste d'asservissement jusqu'au point de référence du programme (voir Figure 3)	67,500	$\pm 0,030$
P_2	Signal d'ordres, début du mot code d'ordres jusqu'au point de référence du programme (Voir Figure 3).	67,500	$\pm 0,300$
W	Largeur de bande	6,350	$\pm 0,005$
X_0	Emplacement du début de la zone SSA dans le secteur ITI	0	$\pm 0,050$
X_1	Emplacement du début des blocs de synchronisation des données audio	0,809	$\pm 0,050$
X_2	Emplacement du début des blocs de synchronisation des données vidéo	3,790	$\pm 0,050$
X_3	Emplacement du début des blocs de synchronisation des données de sous-code	31,885	$\pm 0,050$
X_h	Décalage de tête et tolérance en ligne	0,111	$\pm 0,021$
Y_0	Point de référence de piste de programme	0,615	De base
θ	Angle de piste	9,178 4	De base
α_0	Angle d'azimut (piste 0, 2)	19,97	$\pm 0,150^\circ$
α_1	Angle d'azimut (piste 1, 3)	20,03	$\pm 0,150^\circ$


NOTE Il convient d'effectuer les mesures dans les conditions spécifiées en 4.1. Il convient de corriger les mesures pour tenir compte de la vitesse réelle de la bande (voir Figures C.1 et C.3).

**Tableau 4 – Emplacements et dimensions de l'enregistrement
(système 625/50 du format à 50 Mb/s)**

Dimensions en millimètres

Dimensions		Valeur nominale	Tolérance
A	Bord inférieur de la piste d'asservissement	0	De base
B	Bord supérieur de la piste d'asservissement	0,400	$\pm 0,050$
E	Bord inférieur de la zone de programme	0,56	Dérivé
F	Largeur de la zone de programme	5,24	Dérivé
G	Bord inférieur de la piste d'ordres	6,000	$\pm 0,050$
I	Pas de la piste hélicoïdale	0,018	Réf.
L	Longueur totale de la piste hélicoïdale	32,842	Dérivé
M_1	Longueur du secteur ITI avec préambule et postambule	0,877	Dérivé
M_2	Longueur du secteur audio avec préambule et postambule	2,813	Dérivé
M_3	Longueur du secteur vidéo avec préambule et postambule	27,576	Dérivé
M_4	Longueur du secteur de sous-code avec préambule et postambule	0,877	Dérivé
P_z	Impulsion de référence de la piste d'asservissement jusqu'au point de référence du programme (voir Figure 3)	67,500	$\pm 0,030$
P_2	Signal d'ordres, début du mot code d'ordres jusqu'au point de référence du programme (Voir Figure 3).	67,500	$\pm 0,300$
W	Largeur de bande	6,350	$\pm 0,005$
X_0	Emplacement du début de la zone SSA dans le secteur ITI	0	$\pm 0,050$
X_1	Emplacement du début des blocs de synchronisation des données audio	0,810	$\pm 0,050$
X_2	Emplacement du début des blocs de synchronisation des données vidéo	3,793	$\pm 0,050$
X_3	Emplacement du début des blocs de synchronisation des données de sous-code	31,917	$\pm 0,050$
X_h			
Y_0	Décalage de tête et tolérance en ligne	0,111	$\pm 0,021$
	Point de référence de piste de programme	0,615	De base
θ	Angle de piste	9,178 4	De base
α_0	Angle d'azimut (piste 0, 2)	19,97	$\pm 0,150^\circ$
α_1	Angle d'azimut (piste 1, 3)	20,03	$\pm 0,150^\circ$

NOTE Il convient d'effectuer les mesures dans les conditions spécifiées en 4.1. Il convient de corriger les mesures pour tenir compte de la vitesse réelle de la bande (voir Figures C.1 et C.3).

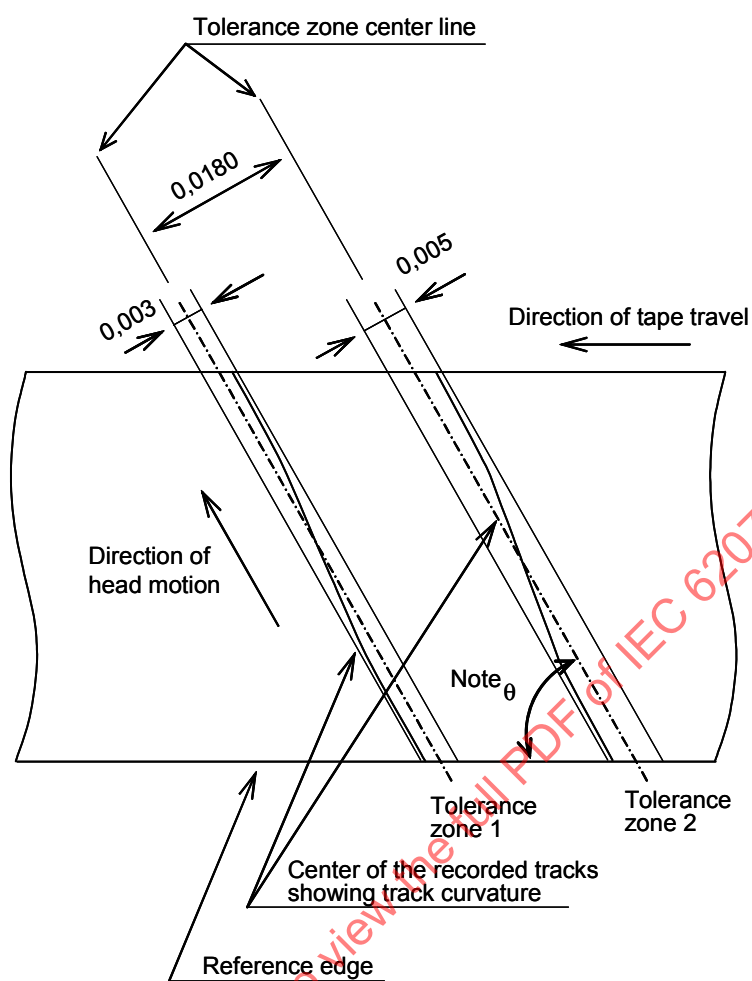

IEC 1861/05


Dimensions en millimètres

NOTE $\theta = 9,1784^\circ$.

Légende

Anglais	Français
Tolerance zone center line	Ligne centrale de la zone de tolérance
Direction of tape travel	Direction de déplacement de la bande
Direction of head motion	Direction de déplacement de la tête
Note θ	Note θ
Tolerance zone 1	Zone de tolérance 1
Tolerance zone 2	Zone de tolérance 2
Center of the recorded tracks showing track curvature	Centre de la piste enregistrée montrant la courbure de la piste
Reference edge	Bord de référence

Figure 4 – Emplacements et dimensions des zones de tolérance de l'enregistrement de la piste hélicoïdale du format à 25 Mb/s

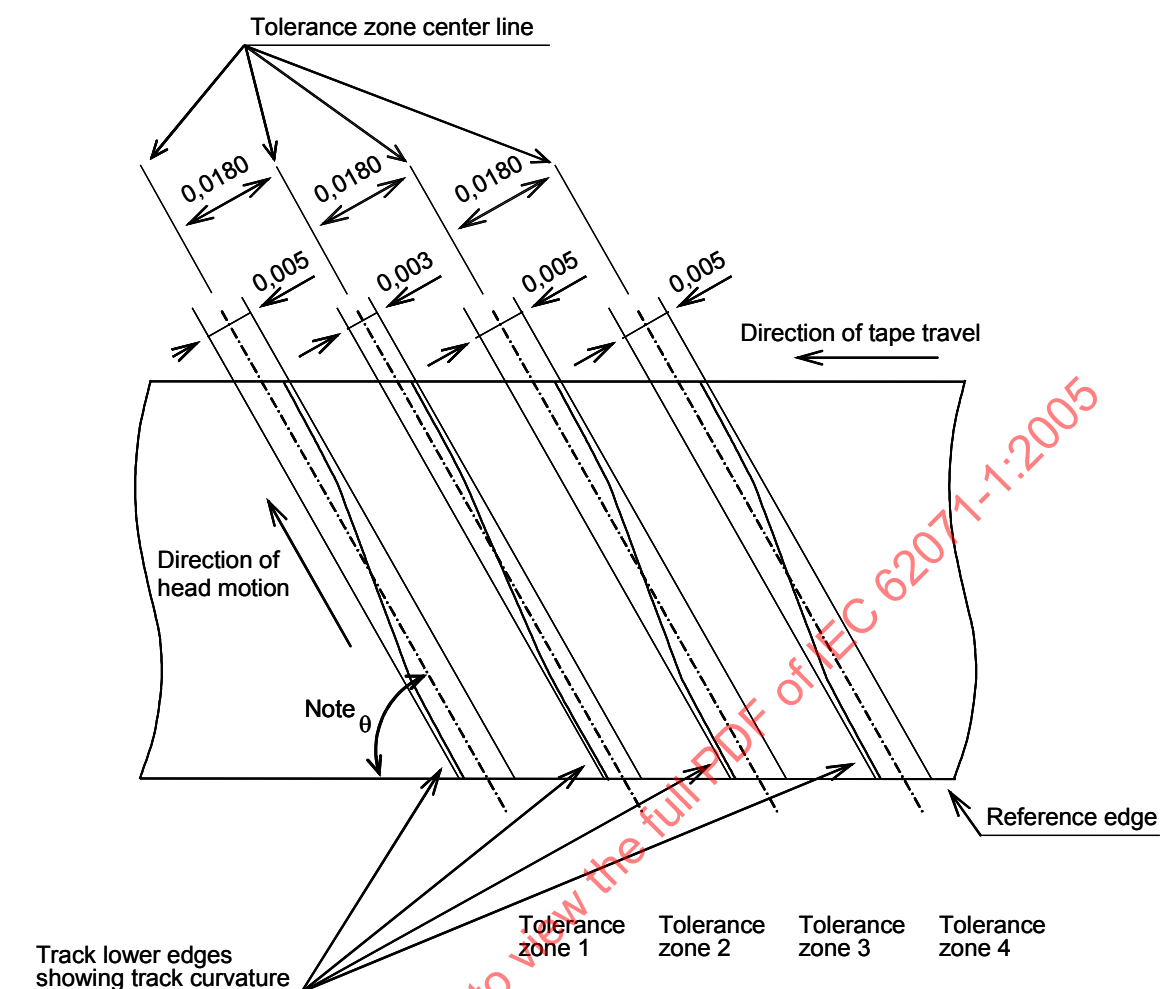

IEC 1862/05

Dimensions en millimètres

NOTE $\theta = 9,1784^\circ$.**Légende**

Anglais	Français
Tolerance zone center line	Ligne centrale de la zone de tolérance
Direction of tape travel	Direction de déplacement de la bande
Direction of head motion	Direction de déplacement de la tête
Note θ	Note θ
Tolerance zone 1	Zone de tolérance 1
Tolerance zone 2	Zone de tolérance 2
Tolerance zone 3	Zone de tolérance 3
Tolerance zone 4	Zone de tolérance 4
Center of the recorded tracks showing track curvature	Centre de la piste enregistrée montrant la courbure de la piste
Reference edge	Bord de référence

Figure 5 – Emplacements et dimensions des zones de tolérance de l'enregistrement de la piste hélicoïdale du format à 50 Mb/s

6.6 Azimut d'entrefers

6.6.1 Pistes d'ordres et d'asservissement

L'angle d'azimut des entrefers des têtes des pistes d'ordres et d'asservissement utilisées pour produire des enregistrements longitudinaux doit être de 90° par rapport à ces pistes enregistrées.

6.6.2 Piste hélicoïdale

L'azimut des entrefers des têtes utilisées pour les pistes hélicoïdales doit être incliné selon des angles α_0 et α_1 , comme cela est spécifié aux Tableaux 1 à 4, par rapport à la ligne perpendiculaire à la piste hélicoïdale. Pour le format à 25 Mb/s, l'azimut de la piste n° 0 de chaque champ doit être orienté dans le sens des aiguilles d'une montre par rapport à la ligne perpendiculaire à la direction de la piste hélicoïdale vue du côté de la bande contenant l'enregistrement magnétique. Pour le format à 50 Mb/s, l'azimut des pistes n° 0 et n° 2 de chaque champ doit être orienté dans le sens des aiguilles d'une montre, de la même manière.

6.6.3 Transport et dispositif de balayage

Le diamètre effectif du tambour, la tension de la bande, l'angle d'hélice et la vitesse de la bande déterminent ensemble l'angle de piste. Différentes méthodes de conception et/ou de variations du diamètre du tambour et de la tension de la bande peuvent produire des enregistrements équivalents pour des fonctions d'interchangeabilité.

Une configuration possible du transport utilise un dispositif de balayage d'un diamètre effectif de 21,700 mm. La rotation du dispositif de balayage est dans le même sens que le défilement de la bande en mode d'enregistrement. Dans le format à 25 Mb/s, les données sont enregistrées par deux têtes montées séparément à 180°. La Figure 6 présente une configuration mécanique possible du dispositif de balayage et la relation entre les têtes longitudinales et le dispositif de balayage. Le Tableau 5 montre les paramètres mécaniques correspondants.

Dans le format à 50 Mb/s, les données sont enregistrées par deux paires de têtes montées séparément à 180°. La Figure 7 présente une configuration mécanique possible du dispositif de balayage et la relation entre les têtes longitudinales et le dispositif de balayage. Le Tableau 6 montre les paramètres mécaniques correspondants.


D'autres configurations mécaniques sont autorisées à condition que la même empreinte d'informations enregistrées soit produite sur la bande.

Tableau 5 – Paramètres pour une conception possible du dispositif de balayage du format à 25 Mb/s

Paramètres	Système 525/60	Système 625/50
Vitesse de rotation du dispositif de balayage (rpm)	9 000/1,001	9 000
Nombre de pistes par rotation	2	
Diamètre du tambour (mm)	21,700	
Tension au centre (N)	0,09	
Angle d'hélice (degrés)	9,150 0	
Angle effectif d'enroulement (degrés)	174	
Vitesse tangentielle du dispositif de balayage (m/s)	10,182	10,192
Fréquence des bits f_b (Hz)	41 850 000	
H_1, H_2 sur enroulement en entrée (degrés)	5,0	
H_1, H_2 sur enroulement en sortie (degrés)	6,0	
Dépassement maximal des pièces polaires (μm)	20	
Largeur de piste de tête d'enregistrement (μm)	18	

Tableau 6 – Paramètres pour une conception possible du dispositif de balayage du format à 50 Mb/s

Paramètres	Système 525/60	Système 625/50
Vitesse de rotation du dispositif de balayage (rpm)	9 000/1,001	9 000
Nombre de pistes par rotation	4	
Diamètre du tambour (mm)	21,700	
Tension au centre (N)	0,09	
Angle d'hélice (degrés)	9,119 7	
Angle effectif d'enroulement (degrés)	174,6	
Vitesse tangentielle du dispositif de balayage (m/s)	10,149	10,159
Fréquence des bits f_b (Hz)	41 715 000	
H_1, H_3 sur enroulement en entrée (degrés)	4,7	
H_1, H_3 sur enroulement en sortie (degrés)	5,7	
Dépassement maximal des pièces polaires (μm)	20	
Largeur de piste de tête d'enregistrement (μm)	18	

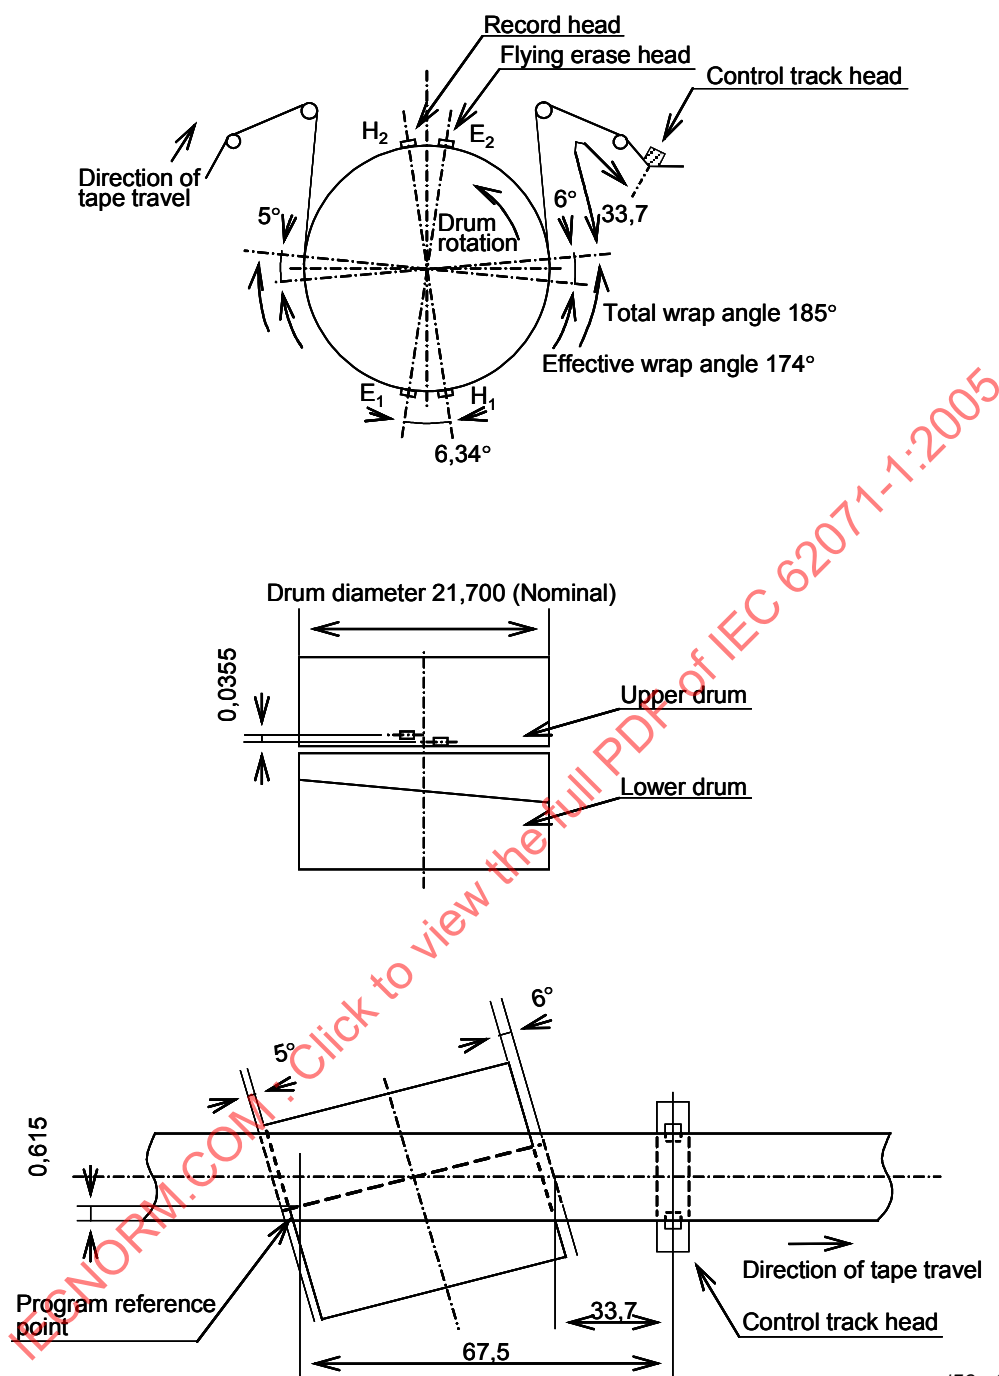

IEC 1863/05


Dimensions en millimètres

Légende

Anglais	Français
Record head	Tête d'enregistrement
Flying erase head	Tête d'effacement mobile
Control track head	Tête de piste d'asservissement
Direction of tape travel	Direction de déplacement de la bande
Drum rotation	Rotation du tambour
Total wrap angle 135°	Angle d'enroulement total 135°
Effective wrap angle 174°	Angle d'enroulement effectif 174°

Anglais	Français
Drum diameter 21,700 (Nominal)	Diamètre du tambour 21,700 (Nominal)
Upper drum	Tambour supérieur
Lower drum	Tambour inférieur
Program reference point	Point de référence du programme
Direction of tape travel	Direction de déplacement de la bande
Control track head	Tête de piste d'asservissement

Figure 6 – Configuration possible du dispositif de balayage et enroulement de la bande du format à 25 Mb/s

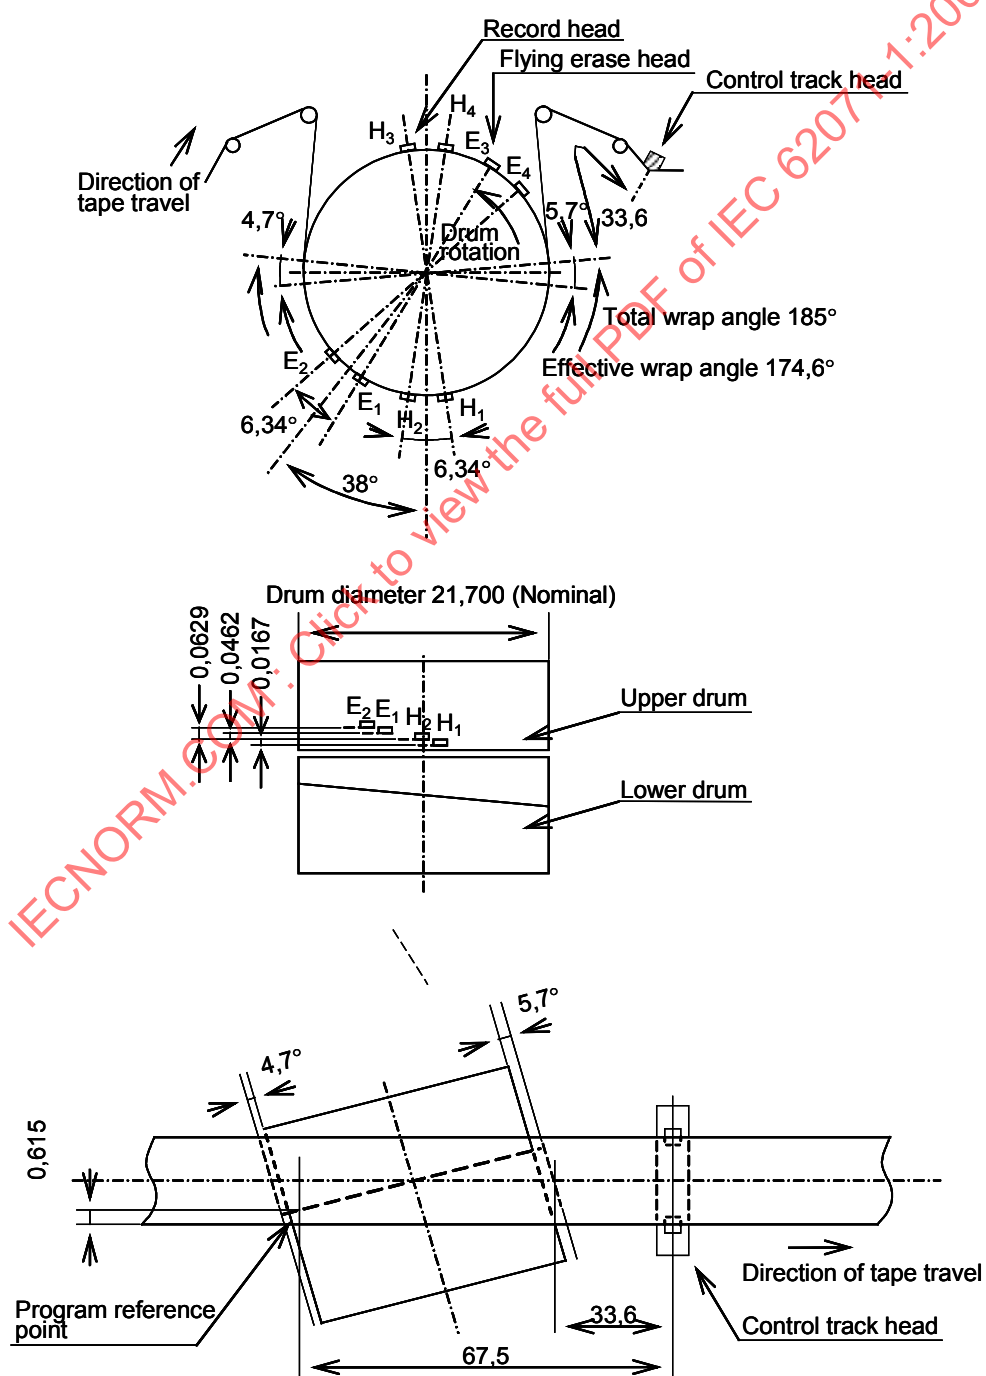

Dimensions en millimètres

Légende

Anglais	Français
Record head	Tête d'enregistrement
Flying erase head	Tête d'effacement mobile
Control track head	Tête de piste d'asservissement
Direction of tape travel	Direction de déplacement de la bande
Drum rotation	Rotation du tambour
Total wrap angle 185°	Angle d'enroulement total 185°
Effective wrap angle 174,6°	Angle d'enroulement effectif 174,6°
Drum diameter 21,700 (Nominal)	Diamètre du tambour 21,700 (Nominal)
Upper drum	Tambour supérieur
lower drum	Tambour inférieur
Program reference point	Point de référence du programme
Direction of tape travel	Direction de déplacement de la bande
Control track head	Tête de piste d'asservissement

Figure 7 – Configuration possible du dispositif de balayage et enroulement de la bande du format à 50 Mb/s

7 Données des pistes de programme

7.1 Généralités

7.1.1 Aperçu général

Pour le format à 25 Mb/s, chaque trame de télévision est enregistrée sur 10 pistes pour le système 525/60 ou 12 pistes pour le système 625/50. Pour le format à 50 Mb/s, chaque trame de télévision est enregistrée sur 20 pistes pour le système 525/60 ou 24 pistes pour le système 625/50. Les pistes hélicoïdales contiennent des données numériques provenant des secteurs ITI, vidéo et audio et du secteur de sous-code.

Le secteur ITI contient les informations de synchronisation de début et les informations de piste. Le secteur de sous-code contient les données de code temporel et d'asservissement, et il peut également inclure d'autres données optionnelles.

La Figure 8 montre un schéma type du circuit d'enregistrement. Tous les intervalles de montage entre secteurs permettent d'intégrer les erreurs de synchronisation pendant le montage. La Figure 9 illustre la répartition des secteurs ITI, vidéo et audio et du secteur de sous-code sur la bande.

Pour la génération d'informations de suivi basse fréquence, la suite de données hélicoïdales est convertie par modulation 24/25 pour obtenir les conditions suivantes:

- Piste F_0 : Affaiblissement des composantes de fréquence de f_1 et f_2 d'au moins 9 dB;
- Piste F_1 : Génération d'une composante de f_1 d'au moins 16 dB, mais pas de plus de 19 dB;
- Piste F_2 : Génération d'une composante de f_2 d'au moins 16 dB, mais pas de plus de 19 dB;

où

$$f_1 = f_b / 90 \text{ (Hz)}$$

$$f_2 = f_b / 60 \text{ (Hz)}$$

f_b = fréquence des bits: fréquence dont la période est un intervalle de temps d'un bit de canal (Hz).


Les pistes sont enregistrées dans le cycle répété de la séquence $F_0 - F_1 - F_0 - F_2$.

Dans le système 525/60 pour le format à 25 Mb/s, PF montre les informations de trame pour la deuxième piste de chaque trame. Les Figures 10 et 11 et les Tableaux 7 et 8 montrent la répartition des signaux pilotes du format à 25 Mb/s. Les Figures 12 et 13 et les Tableaux 9 et 10 montrent la répartition des signaux pilotes du format à 50 Mb/s. La fréquence caractéristique et le niveau enregistré des signaux pilotes à basse fréquence doivent être choisis conformément à la Figure 14.

La fréquence caractéristique recommandée de la piste F_0 est spécifiée à l'Annexe D.

7.1.2 Convention d'étiquetage


Le bit le plus significatif est écrit à gauche et il est enregistré le premier sur la bande. L'octet qui a le plus petit numéro est en haut à gauche et il est le premier de la suite de données en entrée. Les valeurs des octets sont exprimées en hexadécimal, sauf indication contraire. Un indice h indique une valeur hexadécimale.

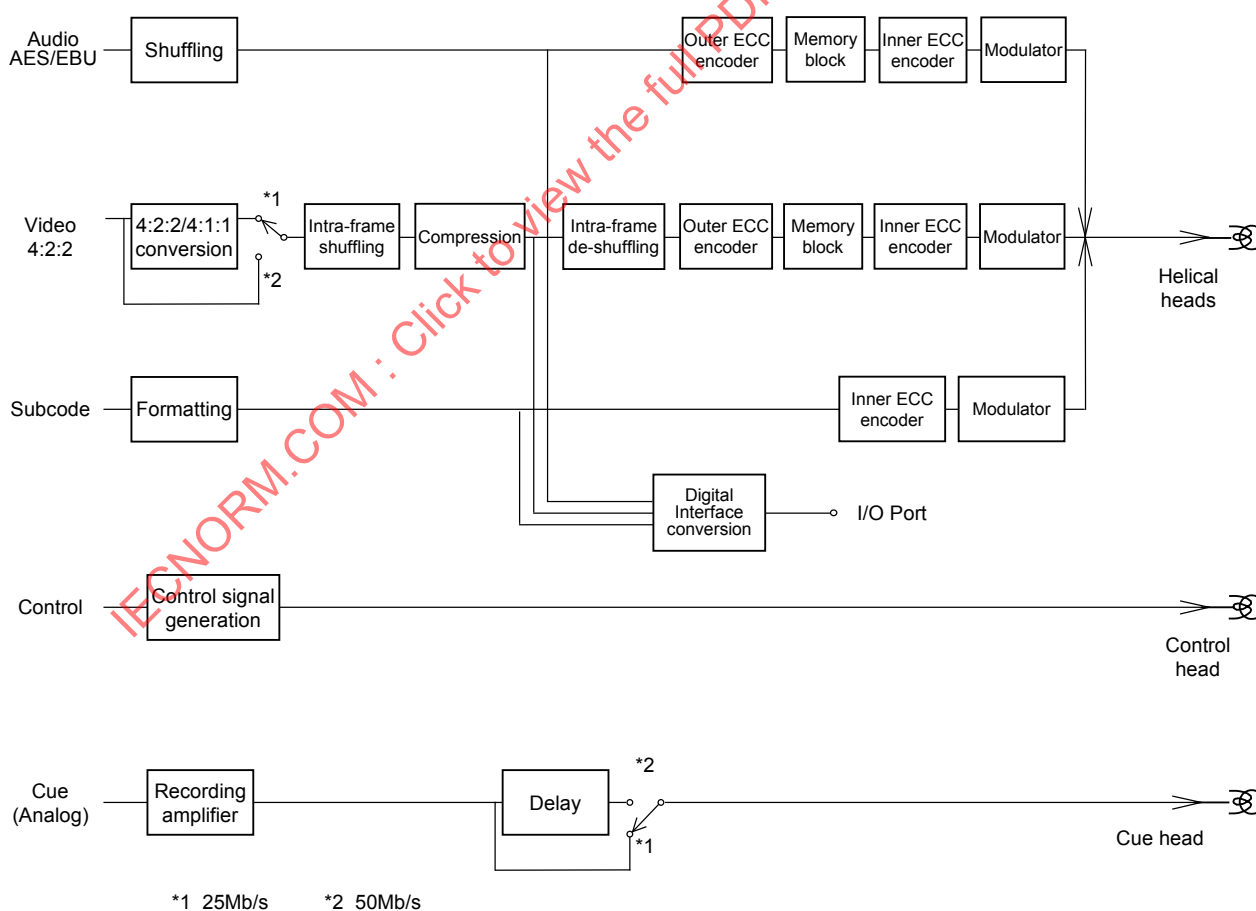

Légende

Anglais	Français
Audio AES/EBU	Audio AES/EBU
Shuffling	Brassage
Outer ECC encoder	Codeur CEC externe
Memory block	Bloc mémoire
Inner ECC encoder	Codeur CEC interne
Modulator	Modulateur
Video 4.2.2	Vidéo 4.2.2
4.2.2/4.2.1 conversion	Conversion 4.2.2/4.2.1
Intra-frame shuffling	Brassage à l'intérieur des trames
Compression	Compression
Intra-frame de-shuffling	Annulation du brassage à l'intérieur des trames
Outer ECC encoder	Codeur CEC externe
Memory block	Bloc mémoire
Inner ECC encoder	Codeur CEC interne
Modulator	Modulateur
Helical heads	Têtes hélicoïdales
Subcode	Sous-code
Formatting	Formatage
Inner ECC encoder	Codeur CEC interne
Modulator	Modulateur
Control	Asservissement
Control signal generation	Génération de signal d'asservissement
Digital interface conversion	Conversion d'interface numérique
I/O Port	Port E/S
Control head	Tête d'asservissement

Figure 8 – Configuration possible de système d'enregistrement avec port d'interface numérique (informative)

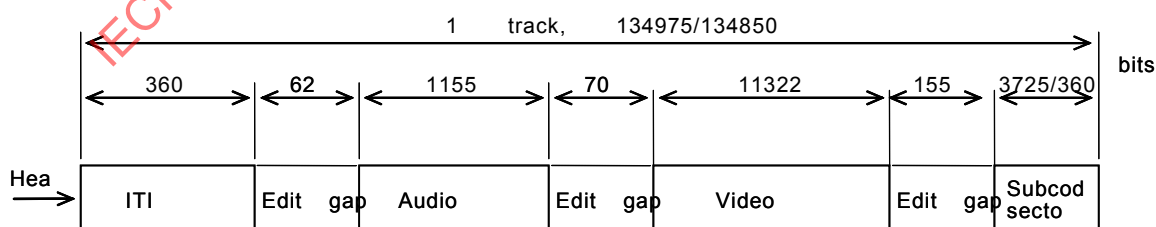

NOTE Système 525/60/système 625/50


IEC 1866/05

Légende

Anglais	Français
1 track, 134975/134850	1 piste, 134975/134850
Head	Tête
Edit gap 1	Intervalle de montage 1

Anglais	Français
Audio sector	Secteur audio
Edit gap 2	Intervalle de montage 2
Video sector	Secteur vidéo
Edit gap 3	Intervalle de montage 3
Subcode sector	Secteur de sous-code


Figure 9 – Répartition des secteurs sur la piste hélicoïdale

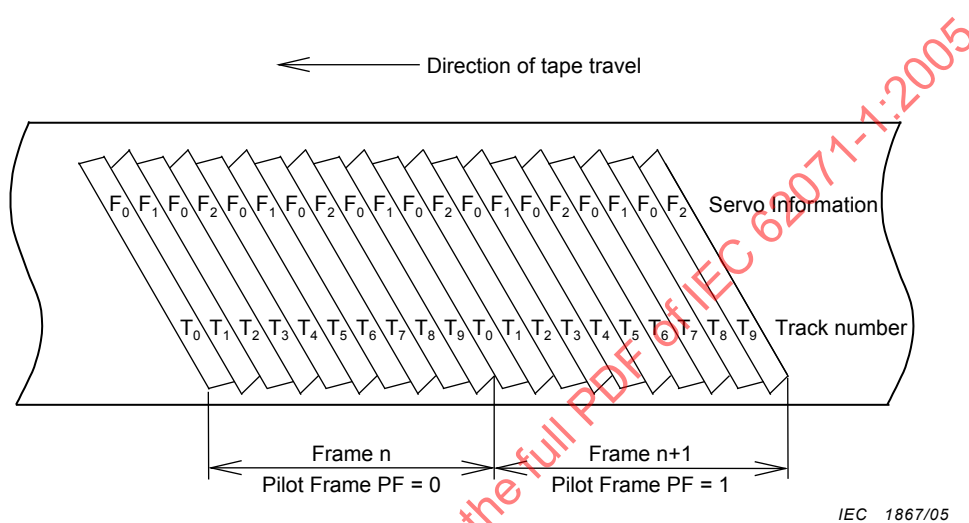

Légende

Anglais	Français
Direction of tape travel	Direction de déplacement de la bande
Servo information	Informations d'asservissement
Track number	Numéro de piste
Frame n	Trame n
Pilot Frame PF = 0	Trame pilote PF = 0
Frame n + 1	Trame n + 1
Pilot Frame PF = 1	Trame pilote PF = 1


Figure 10 – Trames et pistes (système 525/60 du format à 25 Mb/s)

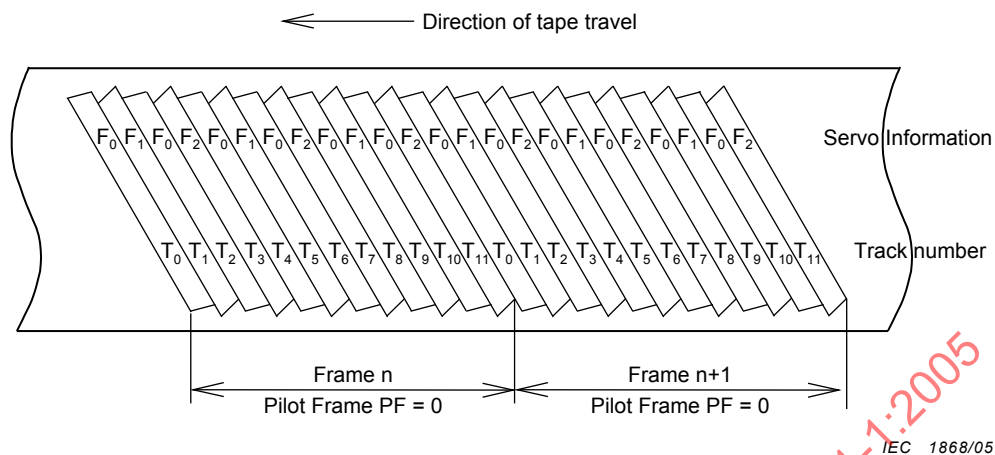


Légende

Anglais	Français
Direction of tape travel	Direction de déplacement de la bande
Servo information	Informations d'asservissement
Track number	Numéro de piste
Frame n	Trame n
Pilot Frame PF = 0	Trame pilote PF = 0
Frame n + 1	Trame n + 1
Pilot Frame PF = 0	Trame pilote PF = 0

Figure 11 – Trames et pistes (système 625/50 du format à 25 Mb/s)

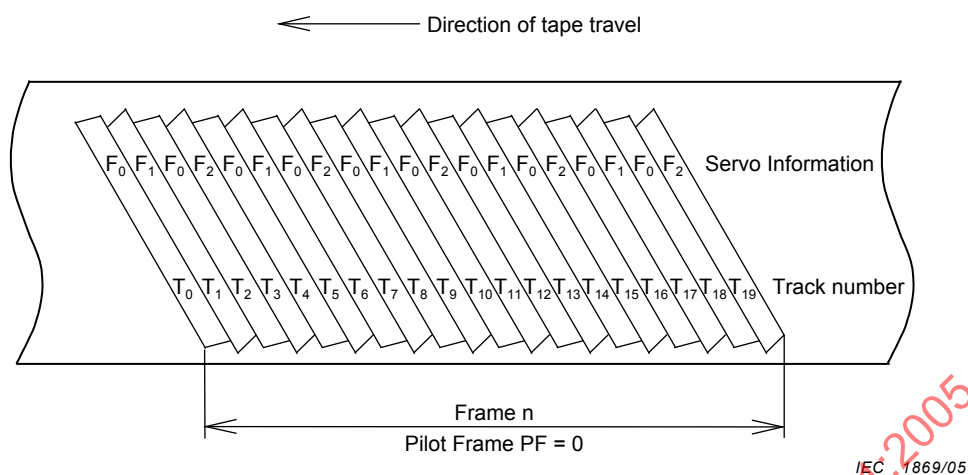**Légende**

Anglais	Français
Direction of tape travel	Direction de déplacement de la bande
Servo information	Informations d'asservissement
Track number	Numéro de piste
Frame n	Trame n
Pilot Frame PF = 0	Trame pilote PF = 0

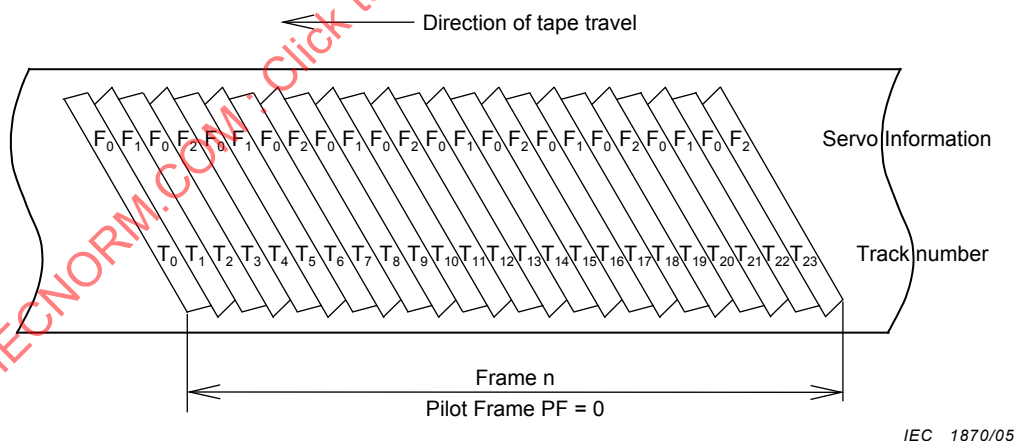Figure 12 – Trame et pistes (système 525/60 du format à 50 Mb/s)**Légende**

Anglais	Français
Direction of tape travel	Direction de déplacement de la bande
Servo information	Informations d'asservissement
Track number	Numéro de piste
Frame n	Trame n
Pilot Frame PF = 0	Trame pilote PF = 0

Figure 13 – Trame et pistes (système 625/50 du format à 50 Mb/s)

**Tableau 7 – Informations de trame et d'asservissement
(système 525/60 du format à 25 Mb/s)**

Trame	Numéro de piste	Informations d'asservissement	Trame pilote PF
Trame n	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
Trame $n+1$	T_0	F_0	1
	T_1	F_2	1
	T_2	F_0	1
	T_3	F_1	1
	T_4	F_0	1
	T_5	F_2	1
	T_6	F_0	1
	T_7	F_1	1
	T_8	F_0	1
	T_9	F_2	1

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

**Tableau 8 – Informations de trame et d'asservissement
(système 625/50 du format à 25 Mb/s)**

Trame	Numéro de piste	Informations d'asservissement	Trame pilote PF
Trame n	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
	T_{10}	F_0	0
	T_{11}	F_2	0
Trame $n+1$	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
	T_{10}	F_0	0
	T_{11}	F_2	0


**Tableau 9 – Informations de trame et d'asservissement
(système 525/60 du format à 50 Mb/s)**

Trame	Numéro de piste	Informations d'asservissement	Trame pilote PF
Trame n	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
	T_{10}	F_0	0
	T_{11}	F_2	0
	T_{12}	F_0	0
	T_{13}	F_1	0
	T_{14}	F_0	0
	T_{15}	F_2	0
	T_{16}	F_0	0
	T_{17}	F_1	0
	T_{18}	F_0	0
	T_{19}	F_2	0


IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

**Tableau 10 – Informations de trame et d'asservissement
(système 625/50 du format à 50 Mb/s)**


Trame	Numéro de piste	Informations d'asservis- sment	Trame pilote PF
Trame n	T_0	F_0	0
	T_1	F_1	0
	T_2	F_0	0
	T_3	F_2	0
	T_4	F_0	0
	T_5	F_1	0
	T_6	F_0	0
	T_7	F_2	0
	T_8	F_0	0
	T_9	F_1	0
	T_{10}	F_0	0
	T_{11}	F_2	0
	T_{12}	F_0	0
	T_{13}	F_1	0
	T_{14}	F_0	0
	T_{15}	F_2	0
	T_{16}	F_0	0
	T_{17}	F_1	0
	T_{18}	F_0	0
	T_{19}	F_2	0
	T_{20}	F_0	0
	T_{21}	F_1	0
	T_{22}	F_0	0
	T_{23}	F_2	0

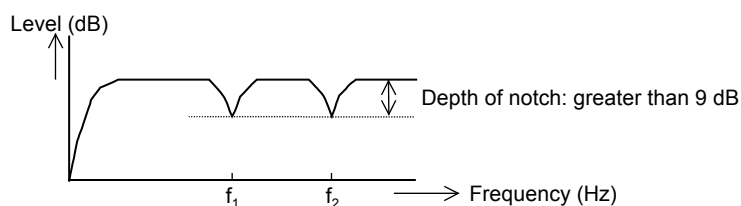



(a) Track F0

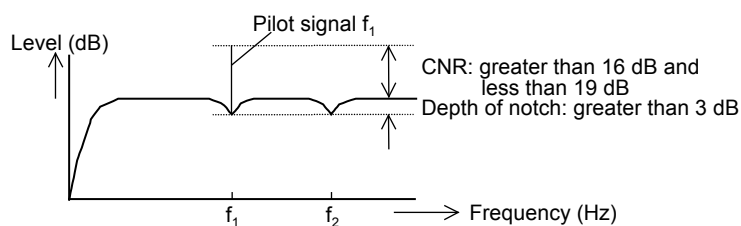

(b) Track F1

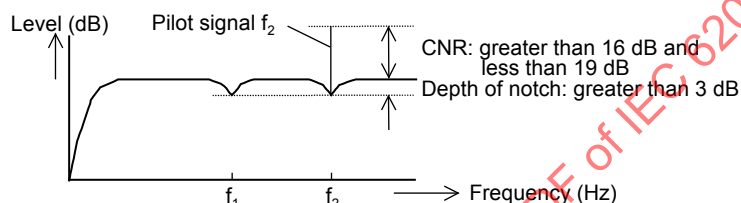

(c) Track F2

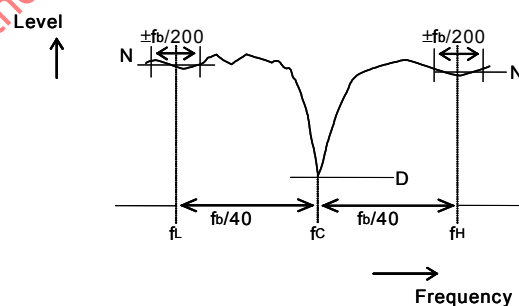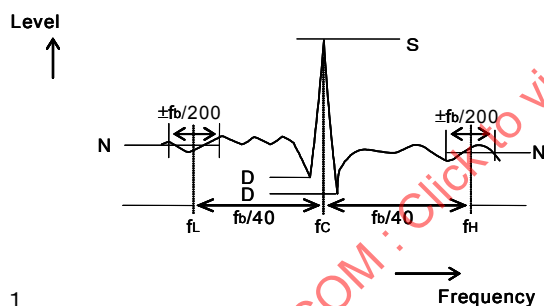

1

IEC 1871/05

NOTE 1 $f_1 = f_b / 90$ (Hz)

$f_2 = f_b / 60$ (Hz)

f_b est la fréquence des bits: fréquence dont la période est un intervalle de temps d'un bit de canal (Hz).

Largeur de bande de résolution = $f_b / 20\,925$ (Hz)

Les données sont obtenues par intégration sur 30 cycles répétés.

NOTE 2 $CNR = [S - (N_1 + N_2) / 2]$ (dB)

Profondeur de creux avec crête = $[(N_1 + N_2) / 2 - (D_1 + D_2) / 2]$ (dB)

Profondeur de creux sans crête = $[(N_1 + N_2) / 2 - D]$ (dB)

N_1 est défini comme une valeur moyenne sur $f_L \pm f_b / 2\,000$ (dB)

N_2 est défini comme une valeur moyenne sur $f_H \pm f_b / 2\,000$ (dB)

f_L est défini comme $f_c - f_b / 400$ (Hz)

f_H est défini comme $f_c + f_b / 400$ (Hz)

f_c signifie une fréquence de crête ou de creux (Hz)

Légende

Anglais	Français
Level (dB)	Niveau (dB)
Depth of notch: greater than 9 dB	Profondeur de creux supérieure à 9 dB
(a) Track F0	(a) Piste F0
Frequency (Hz)	
Level (dB)	Niveau (dB)
Pilot signal f_1	Signal pilote f_1
CNR: greater than 16 dB and less than 19 dB	CNR: supérieur à 16 dB et inférieur à 19 dB
Depth of notch: greater than 9 dB	Profondeur de creux supérieure à 9 dB
Frequency (Hz)	Fréquence (Hz)
(b) Track F1	(b) Piste F1
Level (dB)	Niveau (dB)
Pilot signal f_2	Signal pilote f_2
CNR: greater than 16 dB and less than 19 dB	CNR: supérieur à 16 dB et inférieur à 19 dB
Depth of notch: greater than 9 dB	Profondeur de creux supérieure à 9 dB
(c) Track F2	(c) Piste F2
Frequency (Hz)	Fréquence (Hz)
Level	Niveau
Frequency	Fréquence
Level	Niveau
Frequency	Fréquence

Figure 14 – Caractéristiques de fréquence des pistes

7.1.3 Traitement du signal


Les Figures 15 à 17 montrent le traitement de modulation lié aux signaux enregistrés. Les données de la piste de programme à l'exception de ID0 doivent subir les trois opérations suivantes:

- tirage aléatoire;
- modulation 24-25;
- précodage.

Les données de la piste de programme de ID0 doivent subir les deux opérations suivantes:

- tirage aléatoire;
- précodage.

La Figure 18 montre un schéma possible du processus.

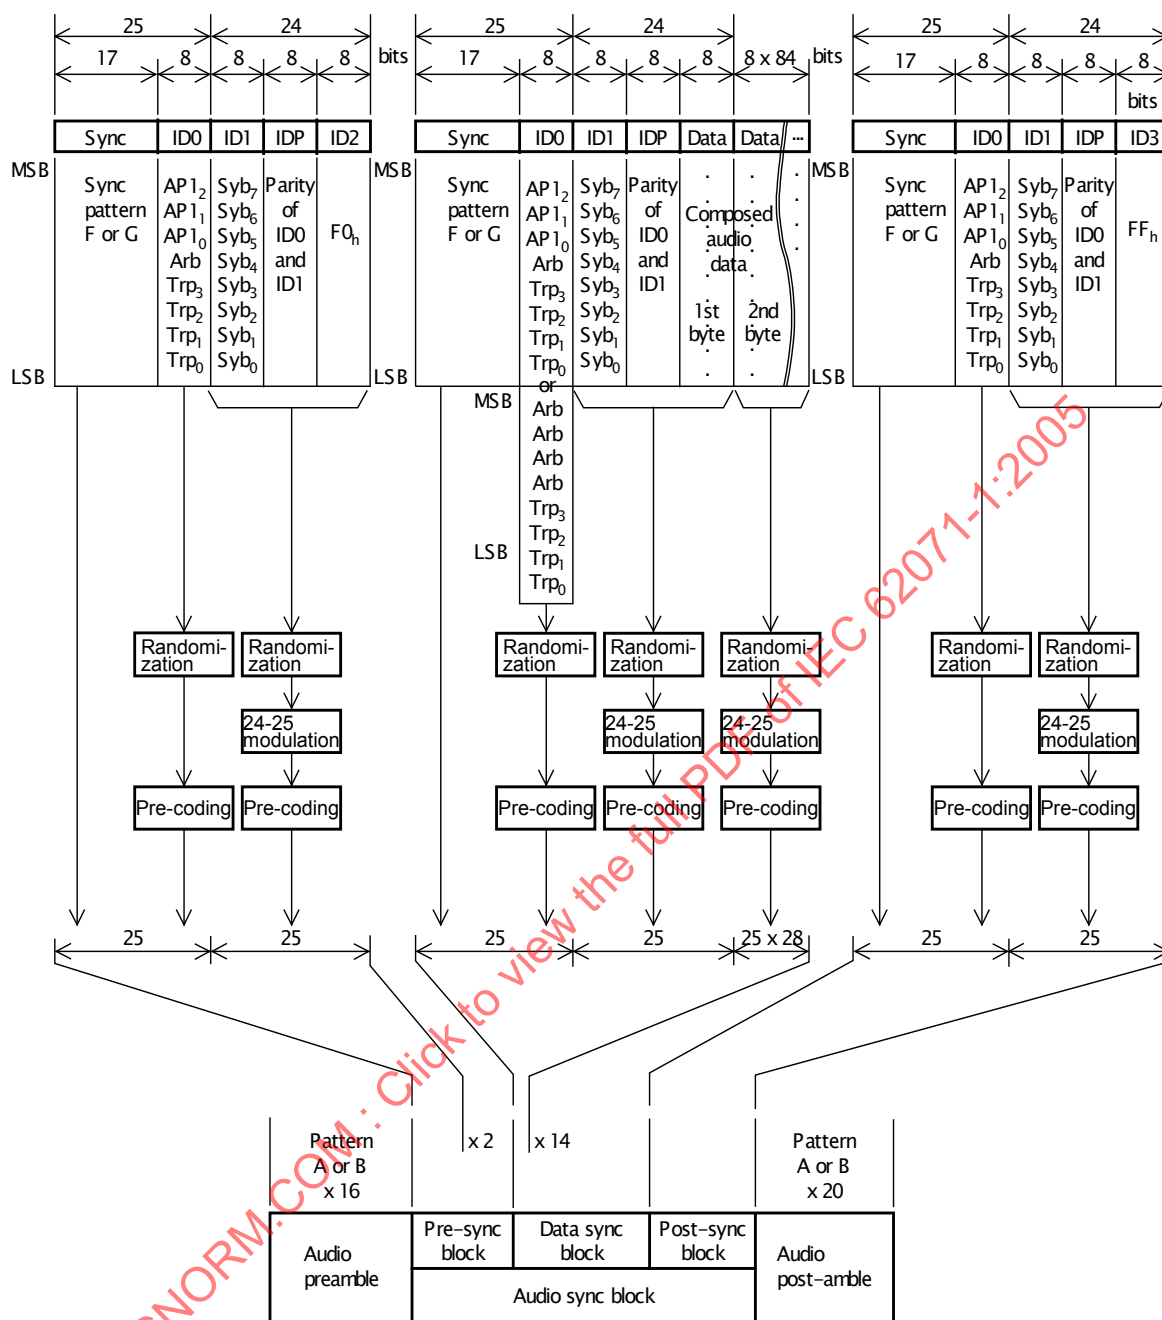


IEC 1872/05

Légende

Anglais	Français
Sync pattern F or G	Mot de synchronisation F ou G
Parity of ID0 and ID1	Parité de ID0 et ID1
Sync pattern F or G	Mot de synchronisation F ou G
Parity of ID0 and ID1	Parité de ID0 et ID1
Composed audio data	Données audio composées
1st byte	1er octet
2nd byte	2ème octet
Sync pattern F or G	Mot de synchronisation F ou G

Anglais	Français
Parity of ID0 and ID1	Parité de ID0 et ID1
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Pre-coding	Précodage
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Pattern A or B x 16	Structure A ou B x 16
Pattern A or B x 37	Structure A ou B x 37
Audio preamble	Préambule audio
Pre-sync block	Bloc de pré-synchronisation
Data sync block	Bloc de synchronisation des données
Post-sync block	Bloc de postsynchronisation
Audio sync block	Bloc de synchronisation audio
Audio post-amble	Postambule audio

Figure 15 – Modulation pour le secteur audio

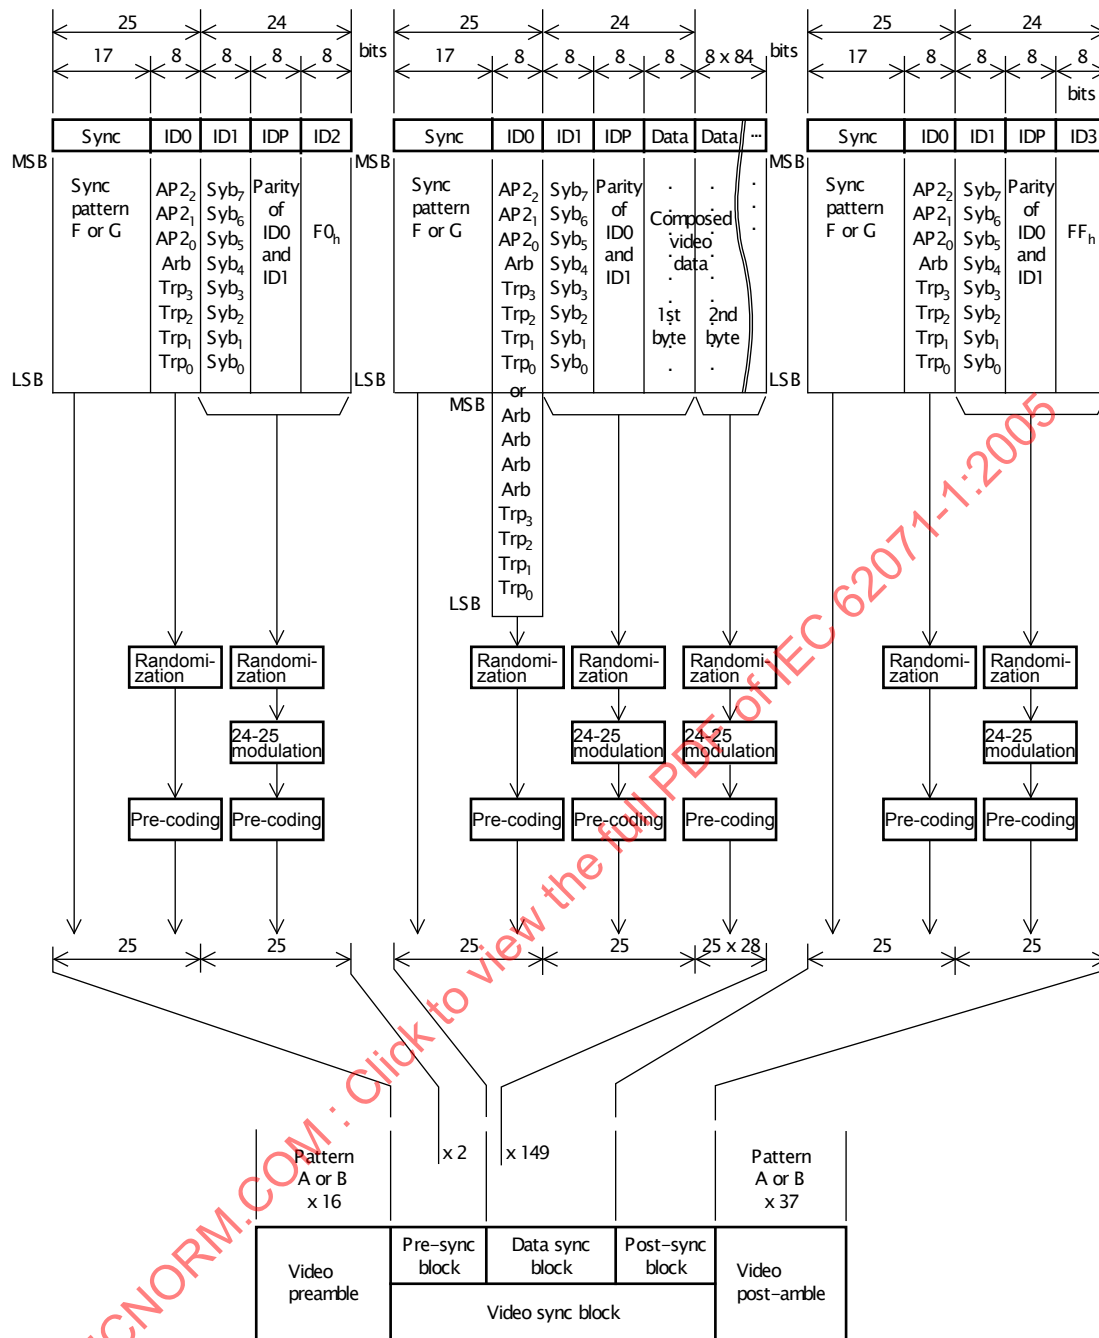


IEC 1873/05

Légende

Anglais	Français
Sync pattern F or G	Mot de synchronisation F ou G
Parity of ID0 and ID1	Parité de ID0 et ID1
Sync pattern F or G	Mot de synchronisation F ou G
Parity of ID0 and ID1	Parité de ID0 et ID1
Composed audio data	Données audio composées
1st byte	1er octet
2nd byte	2ème octet
Sync pattern F or G	Mot de synchronisation F ou G

Anglais	Français
Parity of ID0 and ID1	Parité de ID0 et ID1
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Pre-coding	Précodage
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Pattern A or B x 16	Structure A ou B x 16
Pattern A or B x 20	Structure A ou B x 20
Video preamble	Préambule vidéo
Pre-sync block	Bloc de pré-synchronisation
Data sync block	Bloc de synchronisation des données
Post-sync block	Bloc de postsynchronisation
Video sync block	Bloc de synchronisation vidéo
Video post-amble	Postambule vidéo

Figure 16 – Modulation pour le secteur vidéo

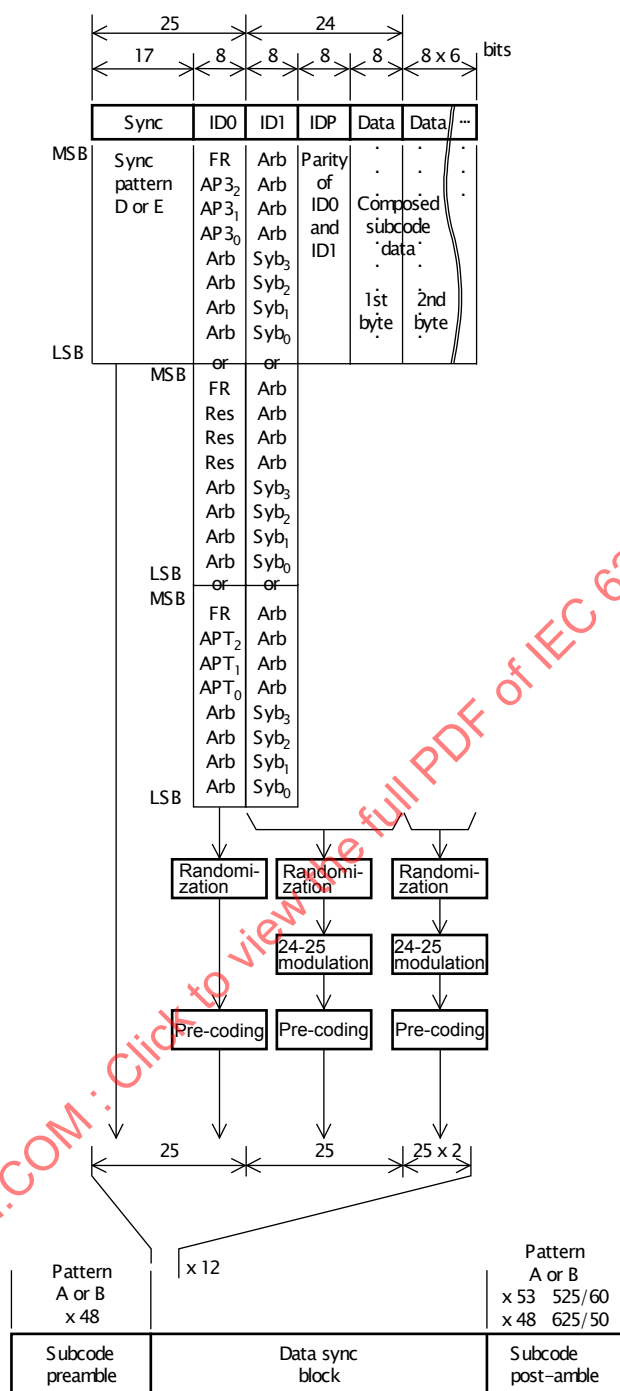

IEC 1874/05


Légende

Anglais	Français
Sync pattern D or E	Mot de synchronisation D ou E
Parity of ID0 and ID1	Parité de ID0 et ID1
Composed audio data	Données audio composées
1st byte	1er octet
2nd byte	2ème octet
Randomization	Tirage aléatoire
Randomization	Tirage aléatoire

Anglais	Français
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
24-25 modulation	Modulation 24-25
Pre-coding	Précodage
Pre-coding	Précodage
Pre-coding	Précodage
Pattern A or B x 48	Structure A ou B x 48
Pattern A or B	Structure A ou B x 16
Sub-code preamble	Préambule de sous-code
Data sync block	Bloc de synchronisation des données
Sub-code post-amble	Postambule de sous-code

Figure 17 – Modulation pour le secteur de sous-code

IECNORM.COM : Click to view the full PDF of IEC 62071-1:2005

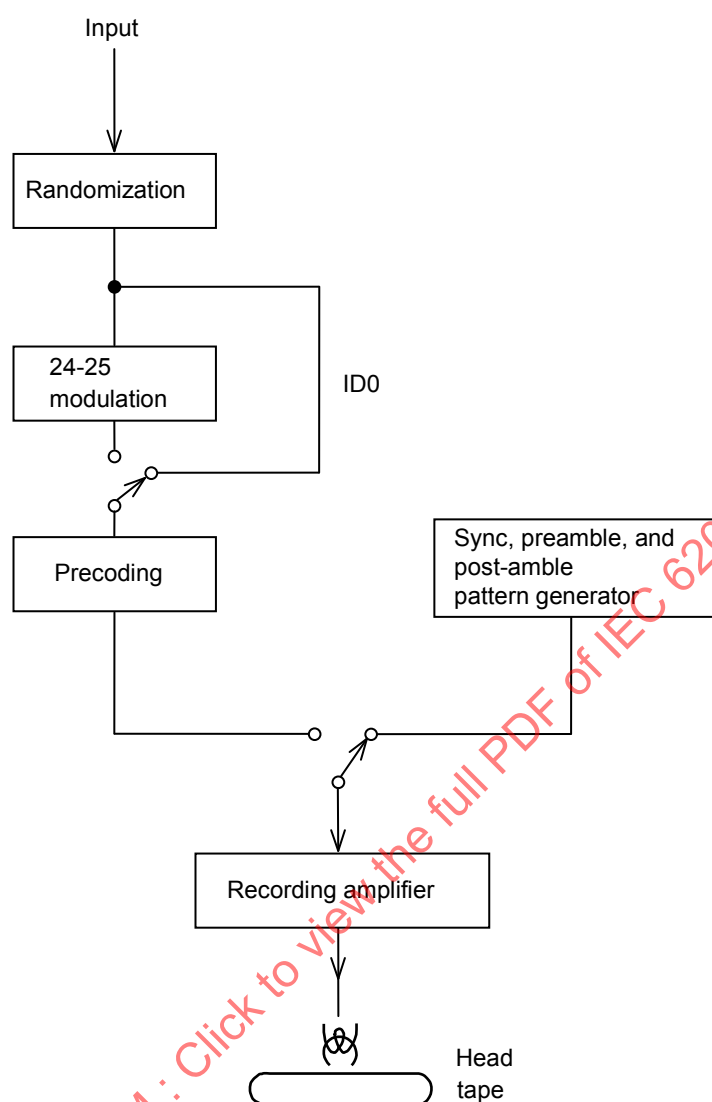

IEC 1875/05

Légende

Anglais	Français
Input	Entrée
Randomization	Tirage aléatoire
24-25 modulation	Modulation 24-25
Precoding	Précodage
Sync. Preamble, and post-amble pattern generator	Générateur de configuration de préambule et postambule de synchronisation
Recording amplifier	Amplificateur d'enregistrement
Head tape	Tête de bande

Figure 18 – Schéma possible pour le traitement des signaux

7.1.3.1 Tirage aléatoire

A l'exception des mots de synchronisation, les suites de bits de données doivent subir un tirage aléatoire. Le tirage aléatoire est équivalent à l'exécution d'une opération de «ou» exclusif entre la suite de données série et la suite série générée par la fonction polynôme suivante:

$$X^7 + X^3 + 1$$

où X^i sont des variables de position dans le champ binaire GF(2). Le premier terme est le plus significatif et le premier à entrer dans le calcul de division. Le tirage aléatoire est réinitialisé à ID0.

Le tirage aléatoire limite la longueur du programme de la même valeur binaire.


7.1.3.2 Modulation 24-25

La modulation 24-25 est appliquée à la suite de bits de données ayant subi le tirage aléatoire. Un bit supplémentaire est inséré dans la suite de bits au début des trois octets consécutifs ayant subi le tirage aléatoire, comme cela est indiqué à la Figure 19. La sortie de modulation, 25 bits de données, est appelée mot code. Les critères suivants sont utilisés pour insérer un bit 1 ou 0 au début de chacun des trois octets consécutifs:

- si la longueur du traitement des 1 ou des 0, y compris le bit supplémentaire à insérer à la jonction, est inférieure à 9, un bit produisant la fréquence pilote nécessaire est inséré;
- si la longueur du traitement des 1 ou des 0, y compris le bit supplémentaire à insérer à la jonction, dépasse 10, un bit interrompant le déroulement est inséré;
- avec le bit supplémentaire à insérer à la jonction et si la longueur du traitement des 1 et des 0 dépasse 10, un bit produisant la fréquence pilote nécessaire est inséré.

7.1.3.3 Précodage

La suite modulée de bits doit être convertie en NRZI entrelacé comme représenté aux Figures 15 à 17 et à la Figure 20.

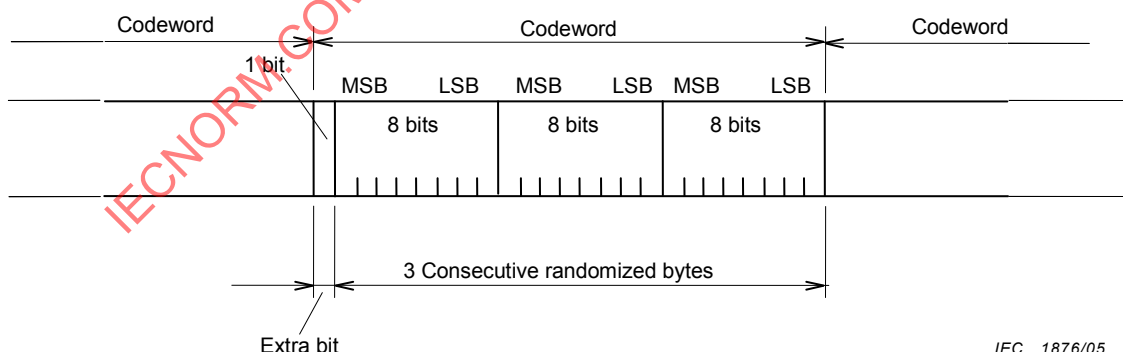

IEC 1876/05

Légende

Anglais	Français
Codeword	Mot code
Codeword	Mot code
Codeword	Mot code
1 bit	1 bit
8 bits	8 bits

Anglais	Français
8 bits	8 bits
8 bits	8 bits
Extra bit	Bit supplémentaire
3 Consecutive randomized bytes	3 octets consécutifs ayant subi un tirage aléatoire

Figure 19 – Suite de bits avant la modulation NRZI entrelacée

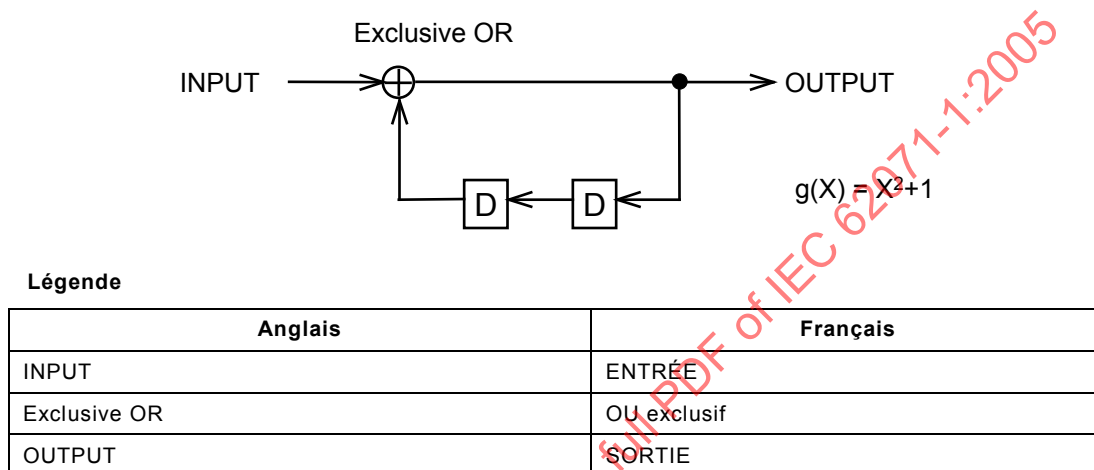


Figure 20 – Précodage

IEC 1877/05

7.1.4 Magnétisation

7.1.4.1 Polarité

Le magnétoscope doit fonctionner en lecture sans tenir compte de la polarité du flux enregistré sur les pistes hélicoïdales.

7.1.4.2 Egalisation de l'enregistrement

Le courant d'enregistrement doit produire, dans l'entrefer de tête, un flux d'enregistrement de niveau constant à ± 1 dB entre f_1 et $f_b/2$.

7.1.4.3 Niveau du courant d'enregistrement

Le courant optimal est de 6 dB supérieur à la partie inférieure de la valeur de courant produisant 1 dB en dessous de la sortie de lecture maximale à $f_b/2$.

7.2 Secteur d'information de piste initiale (ITI)

7.2.1 Structure

Le secteur ITI est situé du côté entrée de chaque piste pour un emplacement précis de la tête de lecture. Le secteur ITI, après enregistrement initial, n'est pas remplacé pendant une opération de montage.

Le secteur ITI contient les éléments suivants:

- Préambule ITI;
- Début de la zone de synchronisation (SSA);

- Zone d'information de piste (TIA);
- Postamble ITI.

La Figure 21 montre la structure du secteur ITI.


7.2.2 Préambule ITI

La suite de bits du préambule ITI avant l'enregistrement doit être définie comme dans les Tableaux 11 à 13 conformément au signal pilote basse fréquence approprié pour chaque piste. La longueur du préambule ITI, telle qu'elle est enregistrée sur la bande, doit être de 1 400 bits.

7.2.3 Début de la zone de synchronisation (SSA)

La zone SSA est constituée de 61 blocs de synchronisation et chaque bloc de synchronisation est constitué de 30 bits. Chaque bloc de synchronisation de début possède un numéro qui indique la position du bloc de synchronisation à partir du début de la zone SSA en commençant à zéro.

La suite de données de la zone SSA après la modulation doit être définie comme dans les Tableaux 14 à 16 conformément aux signaux pilotes basse fréquence. La longueur de la zone SSA, telle qu'elle est enregistrée sur la bande, doit être de 1 830 bits.

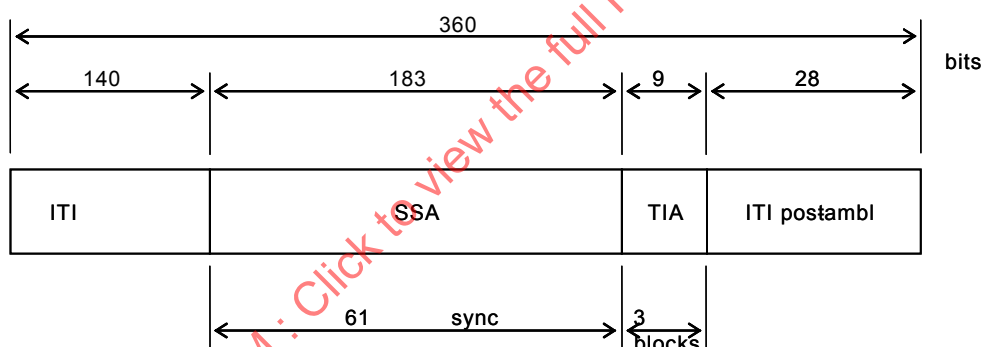

IEC 1878/05

NOTE Chaque bloc de synchronisation possède 30 bits.

Légende

Anglais	Français
ITI Preamble	Préambule ITI
ITI Post-amble	Postamble ITI
61 sync blocks	61 blocs de synchronisation
2 sync blocks	2 blocs de synchronisation

Figure 21 – Structure du secteur ITI

Tableau 11 – Suite de bits du préambule ITI pour l'information d'asservissement F_0

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	1000101110	40	1000101110	80	1000101110	120	1000101110
1	1000101110	41	1000101110	81	1000101110	121	1000101110
2	1000101110	42	1000101110	82	1000101110	122	1000101110
3	1000101110	43	1000101110	83	1000101110	123	1000101110
4	1000101110	44	1000101110	84	1000101110	124	1000101110
5	1000101110	45	1000101110	85	1000101110	125	1000101110
6	1000101110	46	1000101110	86	1000101110	126	1000101110
7	1000101110	47	1000101110	87	1000101110	127	1000101110
8	1000101110	48	1000101110	88	1000101110	128	1000101110
9	1000101110	49	1000101110	89	1000101110	129	1000101110
10	1000101110	50	1000101110	90	1000101110	130	1000101110
11	1000101110	51	1000101110	91	1000101110	131	1000101110
12	1000101110	52	1000101110	92	1000101110	132	1000101110
13	1000101110	53	1000101110	93	1000101110	133	1000101110
14	1000101110	54	1000101110	94	1000101110	134	1000101110
15	1000101110	55	1000101110	95	1000101110	135	1000101110
16	1000101110	56	1000101110	96	1000101110	136	1000101110
17	1000101110	57	1000101110	97	1000101110	137	1000101110
18	1000101110	58	1000101110	98	1000101110	138	1000101110
19	1000101110	59	1000101110	99	1000101110	139	1000101110
20	1000101110	60	1000101110	100	1000101110		
21	1000101110	61	1000101110	101	1000101110		
22	1000101110	62	1000101110	102	1000101110		
23	1000101110	63	1000101110	103	1000101110		
24	1000101110	64	1000101110	104	1000101110		
25	1000101110	65	1000101110	105	1000101110		
26	1000101110	66	1000101110	106	1000101110		
27	1000101110	67	1000101110	107	1000101110		
28	1000101110	68	1000101110	108	1000101110		
29	1000101110	69	1000101110	109	1000101110		
30	1000101110	70	1000101110	110	1000101110		
31	1000101110	71	1000101110	111	1000101110		
32	1000101110	72	1000101110	112	1000101110		
33	1000101110	73	1000101110	113	1000101110		
34	1000101110	74	1000101110	114	1000101110		
35	1000101110	75	1000101110	115	1000101110		
36	1000101110	76	1000101110	116	1000101110		
37	1000101110	77	1000101110	117	1000101110		
38	1000101110	78	1000101110	118	1000101110		
39	1000101110	79	1000101110	119	1000101110		

Tableau 12 – Suite de bits du préambule ITI pour l'information d'asservissement F₁

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	1101110001	40	1000101110	80	0010001110	120	1101110001
1	1101110001	41	0010001110	81	1101110001	121	1000101110
2	1101110001	42	0010001110	82	1101110001	122	0010001110
3	1101110001	43	0010001110	83	1101110001	123	0010001110
4	1000101110	44	0010001110	84	1101110001	124	0010001110
5	0010001110	45	1101110001	85	1000101110	125	0010001110
6	0010001110	46	1101110001	86	0010001110	126	1101110001
7	0010001110	47	1101110001	87	0010001110	127	1101110001
8	0010001110	48	1101110001	88	0010001110	128	1101110001
9	1101110001	49	1000101110	89	0010001110	129	1101110001
10	1101110001	50	0010001110	90	1101110001	130	1000101110
11	1101110001	51	0010001110	91	1101110001	131	0010001110
12	1101110001	52	0010001110	92	1101110001	132	0010001110
13	1000101110	53	0010001110	93	1101110001	133	0010001110
14	0010001110	54	1101110001	94	1000101110	134	0010001110
15	0010001110	55	1101110001	95	0010001110	135	1101110001
16	0010001110	56	1101110001	96	0010001110	136	1101110001
17	0010001110	57	1101110001	97	0010001110	137	1101110001
18	1101110001	58	1000101110	98	0010001110	138	1101110001
19	1101110001	59	0010001110	99	1101110001	139	1000101110
20	1101110001	60	0010001110	100	1101110001		
21	1101110001	61	0010001110	101	1101110001		
22	1000101110	62	0010001110	102	1101110001		
23	0010001110	63	1101110001	103	1000101110		
24	0010001110	64	1101110001	104	0010001110		
25	0010001110	65	1101110001	105	0010001110		
26	0010001110	66	1101110001	106	0010001110		
27	1101110001	67	1000101110	107	0010001110		
28	1101110001	68	0010001110	108	1101110001		
29	1101110001	69	0010001110	109	1101110001		
30	1101110001	70	0010001110	110	1101110001		
31	1000101110	71	0010001110	111	1101110001		
32	0010001110	72	1101110001	112	1000101110		
33	0010001110	73	1101110001	113	0010001110		
34	0010001110	74	1101110001	114	0010001110		
35	0010001110	75	1101110001	115	0010001110		
36	1101110001	76	1000101110	116	0010001110		
37	1101110001	77	0010001110	117	1101110001		
38	1101110001	78	0010001110	118	1101110001		
39	1101110001	79	0010001110	119	1101110001		

Tableau 13 – Suite de bits du préambule ITI pour l'information d'asservissement F₂

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	1101110001	40	0010001110	80	1101110001	120	1101110001
1	1101110001	41	0010001110	81	0010001110	121	1101110001
2	1101110001	42	1101110001	82	0010001110	122	1101110001
3	0010001110	43	1101110001	83	0010001110	123	0010001110
4	0010001110	44	1101110001	84	1101110001	124	0010001110
5	0010001110	45	0010001110	85	1101110001	125	0010001110
6	1101110001	46	0010001110	86	1101110001	126	1101110001
7	1101110001	47	0010001110	87	0010001110	127	1101110001
8	1101110001	48	1101110001	88	0010001110	128	1101110001
9	0010001110	49	1101110001	89	0010001110	129	0010001110
10	0010001110	50	1101110001	90	1101110001	130	0010001110
11	0010001110	51	0010001110	91	1101110001	131	0010001110
12	1101110001	52	0010001110	92	1101110001	132	1101110001
13	1101110001	53	0010001110	93	0010001110	133	1101110001
14	1101110001	54	1101110001	94	0010001110	134	1101110001
15	0010001110	55	1101110001	95	0010001110	135	0010001110
16	0010001110	56	1101110001	96	1101110001	136	0010001110
17	0010001110	57	0010001110	97	1101110001	137	0010001110
18	1101110001	58	0010001110	98	1101110001	138	1101110001
19	1101110001	59	0010001110	99	0010001110	139	1101110001
20	1101110001	60	1101110001	100	0010001110		
21	0010001110	61	1101110001	101	0010001110		
22	0010001110	62	1101110001	102	1101110001		
23	0010001110	63	0010001110	103	1101110001		
24	1101110001	64	0010001110	104	1101110001		
25	1101110001	65	0010001110	105	0010001110		
26	1101110001	66	1101110001	106	0010001110		
27	0010001110	67	1101110001	107	0010001110		
28	0010001110	68	1101110001	108	1101110001		
29	0010001110	69	0010001110	109	1101110001		
30	1101110001	70	0010001110	110	1101110001		
31	1101110001	71	0010001110	111	0010001110		
32	1101110001	72	1101110001	112	0010001110		
33	0010001110	73	1101110001	113	0010001110		
34	0010001110	74	1101110001	114	1101110001		
35	0010001110	75	0010001110	115	1101110001		
36	1101110001	76	0010001110	116	1101110001		
37	1101110001	77	0010001110	117	0010001110		
38	1101110001	78	1101110001	118	0010001110		
39	0010001110	79	1101110001	119	0010001110		

**Tableau 14 – Suite de bits du début de la zone de synchronisation (SSA)
pour l'information d'asservissement F₀**

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	0010011101	50	0101010101	100	0110101001	150	0010011101
1	0101010101	51	0010011101	101	0101011001	151	0110010101
2	0101010101	52	0101101001	102	0010011101	152	0101101001
3	0010011101	53	0101011001	103	0110101001	153	0010011101
4	0101010101	54	0010011101	104	0101101001	154	0110010101
5	0101011001	55	0101101001	105	0010011101	155	0101100101
6	0010011101	56	0101010001	106	0110101001	156	0010011101
7	0101010101	57	0010011101	107	0101100101	157	0110010101
8	0101101001	58	0101101001	108	0010011101	158	0110101001
9	0010011101	59	0101100101	109	0110101001	159	0010011101
10	0101010101	60	0010011101	110	0110101001	160	0110010101
11	0101100101	61	0101101001	111	0010011101	161	0110100101
12	0010011101	62	0110101001	112	0110101001	162	0010011101
13	0101010101	63	0010011101	113	0110100101	163	0110010101
14	0110101001	64	0101101001	114	0010011101	164	0110010101
15	0010011101	65	0110100101	115	0110101001	165	0010011101
16	0101010101	66	0010011101	116	0110010101	166	0110010101
17	0110100101	67	0101101001	117	0010011101	167	0110011001
18	0010011101	68	0110010101	118	0110101001	168	0010011101
19	0101010101	69	0010011101	119	0110011001	169	0110011001
20	0110010101	70	0101101001	120	0010011101	170	0101010101
21	0010011101	71	0110011001	121	0110100101	171	0010011101
22	0101010101	72	0010011101	122	0101010101	172	0110011001
23	0110011001	73	0101100101	123	0010011101	173	0101011001
24	0010011101	74	0101010101	124	0110100101	174	0010011101
25	0101011001	75	0010011101	125	0101011001	175	0110011001
26	0101010101	76	0101100101	126	0010011101	176	0101101001
27	0010011101	77	0101011001	127	0110100101	177	0010011101
28	0101011001	78	0010011101	128	0101101001	178	0110011001
29	0101011001	79	0101100101	129	0010011101	179	0101100101
30	0010011101	80	0101101001	130	0110100101	180	0010011101
31	0101011001	81	0010011101	131	0101100101	181	0110011001
32	0101101001	82	0101100101	132	0010011101	182	0110101001
33	0010011101	83	0101100101	133	0110100101		
34	0101011001	84	0010011101	134	0110101001		
35	0101100101	85	0101100101	135	0010011101		
36	0010011101	86	0110101001	136	0110100101		
37	0101011001	87	0010011101	137	0110100101		
38	0110101001	88	0101100101	138	0010011101		
39	0010011101	89	0110100101	139	0110100101		
40	0101011001	90	0010011101	140	0110010101		
41	0110100101	91	0101100101	141	0010011101		
42	0010011101	92	0110010101	142	0110100101		
43	0101011001	93	0010011101	143	0110011001		
44	0110010101	94	0101100101	144	0010011101		
45	0010011101	95	0110011001	145	0110010101		
46	0101011001	96	0010011101	146	0101010101		
47	0110011001	97	0110101001	147	0010011101		
48	0010011101	98	0101010101	148	0110010101		
49	0101101001	99	0010011101	149	0101011001		

**Tableau 15 – Suite de bits du début de la zone de synchronisation (SSA)
pour l'information d'asservissement F_1**

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	0111001000	50	0101010111	100	1001010100	150	1000110111
1	1010101000	51	1000110111	101	1010100100	151	0110010111
2	1010101000	52	0101101011	102	0111001000	152	0101101001
3	0111001000	53	0101011001	103	0110101011	153	0111001000
4	0101010111	54	0111001000	104	0101101011	154	1001101000
5	0101011011	55	1010010100	105	1000110111	155	1010011000
6	1000110111	56	1010010100	106	0110101011	156	0111001000
7	0101010111	57	0111001000	107	0101100101	157	0110010111
8	0101101001	58	0101101011	108	0111001000	158	0110101011
9	0111001000	59	0101100111	109	1001010100	159	1000110111
10	1010101000	60	1000110111	110	1001010100	160	0110010111
11	1010011000	61	0101101011	111	0111001000	161	0110100101
12	0111001000	62	0110101001	112	0110101011	162	0111001000
13	0101010111	63	0111001000	113	0110100111	163	1001101000
14	0110101011	64	1010010100	114	1000110111	164	1001101000
15	1000110111	65	1001011000	115	0110101011	165	0111001000
16	0101010111	66	0111001000	116	0110010101	166	0110010111
17	0110100101	67	0101101011	117	0111001000	167	0110011011
18	0111001000	68	0110010111	118	1001010100	168	1000110111
19	1010101000	69	1000110111	119	1001100100	169	0110011011
20	1001101000	70	0101101011	120	0111001000	170	0101010101
21	0111001000	71	0110011001	121	0110100111	171	0111001000
22	0101010111	72	0111001000	122	0101010111	172	1001100100
23	0110011011	73	1010011000	123	1000110111	173	1010100100
24	1000110111	74	1010101000	124	0110100111	174	0111001000
25	0101011011	75	0111001000	125	0101011001	175	0110011011
26	0101010101	76	0101100111	126	0111001000	176	0101101011
27	0111001000	77	0101011011	127	1001011000	177	1000110111
28	1010100100	78	1000110111	128	1010010100	178	0110011011
29	1010100100	79	0101100111	129	0111001000	179	0101100101
30	0111001000	80	0101101001	130	0110100111	180	0111001000
31	0101011011	81	0111001000	131	0101100111	181	1001100100
32	0101101011	82	1010011000	132	1000110111	182	1001010100
33	1000110111	83	1010011000	133	0110100111		
34	0101011011	84	0111001000	134	0110101001		
35	0101100101	85	0101100111	135	0111001000		
36	0111001000	86	0110101011	136	1001011000		
37	1010100100	87	1000110111	137	1001011000		
38	1001010100	88	0101100111	138	0111001000		
39	0111001000	89	0110100101	139	0110100111		
40	0101011011	90	0111001000	140	0110010111		
41	0110100111	91	1010011000	141	1000110111		
42	1000110111	92	1001101000	142	0110100111		
43	0101011011	93	0111001000	143	0110011001		
44	0110010101	94	0101100111	144	0111001000		
45	0111001000	95	0110011011	145	1001101000		
46	1010100100	96	1000110111	146	1010101000		
47	1001100100	97	0110101011	147	0111001000		
48	0111001000	98	0101010101	148	0110010111		
49	0101101011	99	0111001000	149	0101011011		


**Tableau 16 – Suite de bits du début de la zone de synchronisation (SSA)
pour l'information d'asservissement F₂**

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	1000110111	50	1010101000	100	0110101011	150	1000110111
1	1010101000	51	0111001000	101	0101011011	151	1001101000
2	1010101000	52	0101101011	102	1000110111	152	1010010100
3	0111001000	53	0101011011	103	1001010100	153	0111001000
4	0101010111	54	1000110111	104	1010010100	154	0110010111
5	0101011011	55	1010010100	105	0111001000	155	0101100111
6	1000110111	56	1010010100	106	0110101011	156	1000110111
7	1010101000	57	0111001000	107	0101100111	157	1001101000
8	1010010100	58	0101101011	108	1000110111	158	1001010100
9	0111001000	59	0101100111	109	1001010100	159	0111001000
10	0101010111	60	1000110111	110	1001010100	160	0110010111
11	0101100111	61	1010010100	111	0111001000	161	0110100111
12	1000110111	62	1001010100	112	0110101011	162	1000110111
13	1010101000	63	0111001000	113	0110100111	163	1001101000
14	1001010100	64	0101101011	114	1000110111	164	1001101000
15	0111001000	65	0110100111	115	1001010100	165	0111001000
16	0101010111	66	1000110111	116	1001101000	166	0110010111
17	0110100111	67	1010010100	117	0111001000	167	0110011011
18	1000110111	68	1001101000	118	0110101011	168	1000110111
19	1010101000	69	0111001000	119	0110011011	169	1001100100
20	1001101000	70	0101101011	120	1000110111	170	1010101000
21	0111001000	71	0110011011	121	1001011000	171	0111001000
22	0101010111	72	1000110111	122	1010101000	172	0110011011
23	0110011011	73	1010011000	123	0111001000	173	0101011011
24	1000110111	74	1010101000	124	0110100111	174	1000110111
25	1010100100	75	0111001000	125	0101011011	175	1001100100
26	1010101000	76	0101100111	126	1000110111	176	1010010100
27	0111001000	77	0101011011	127	1001011000	177	0111001000
28	0101011011	78	1000110111	128	1010010100	178	0110011011
29	0101011011	79	1010011000	129	0111001000	179	0101100111
30	1000110111	80	1010010100	130	0110100111	180	1000110111
31	1010100100	81	0111001000	131	0101100111	181	1001100100
32	1010010100	82	0101100111	132	1000110111	182	1001010100
33	0111001000	83	0101100111	133	1001011000		
34	0101011011	84	1000110111	134	1001010100		
35	0101100111	85	1010011000	135	0111001000		
36	1000110111	86	1001010100	136	0110100111		
37	1010100100	87	0111001000	137	0110100111		
38	1001010100	88	0101100111	138	1000110111		
39	0111001000	89	0110100111	139	1001011000		
40	0101011011	90	1000110111	140	1001101000		
41	0110100111	91	1010011000	141	0111001000		
42	1000110111	92	1001101000	142	0110100111		
43	1010100100	93	0111001000	143	0110011011		
44	1001101000	94	0101100111	144	1000110111		
45	0111001000	95	0110011011	145	1001101000		
46	0101011011	96	1000110111	146	1010101000		
47	0110011011	97	1001010100	147	0111001000		
48	1000110111	98	1010101000	148	0110010111		
49	1010010100	99	0111001000	149	0101011011		

7.2.4 Zone d'information de piste (TIA)

La zone d'information de piste (TIA) est composée de trois blocs de synchronisation. Chaque bloc de synchronisation est composé de 30 bits, comme cela est représenté à la Figure 22. Chaque bloc de synchronisation a la même information de piste. Avant le tirage aléatoire, l'ID d'application d'information de piste doit être définie comme dans le Tableau 17. La trame pilote doit prendre les valeurs du Tableau 18.

Avant l'enregistrement, la suite de données de la zone TIA doit être définie comme dans les Tableaux 19 à 21 conformément aux signaux pilotes basse fréquence. La longueur de la zone TIA, telle qu'elle est enregistrée sur la bande, doit être de 90 bits.

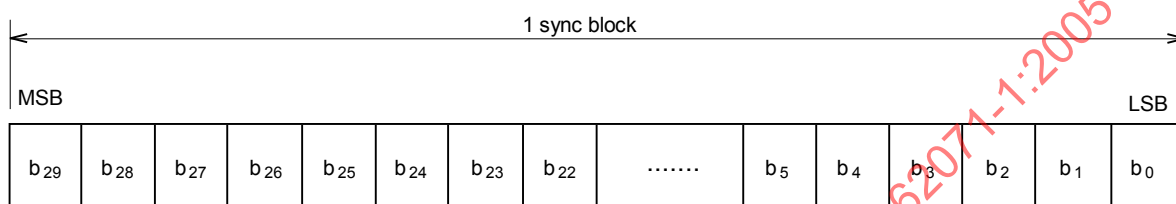

Légende

Anglais	Français
1 sync block	1 bloc de synchronisation

Figure 22 – Structure du bloc de synchronisation de la zone TIA

Tableau 17 – ID d'application des informations de piste

b ₁₇	b ₁₆	b ₁₅	b ₁₄	b ₁₃	b ₁₂	b ₇	b ₆	b ₅	b ₄	ID
APT ₂	APT ₂	APT ₁	APT ₁	APT ₀	APT ₀	TP ₁	TP ₁	TP ₀	TP ₀	
0	0	0	0	1	1	0	0	1	1	Format D-7 standard
Autres										Réservé

Tableau 18 – Trame pilote

	b ₃	b ₂
PF = 0	0	0
PF = 1	1	1

Tableau 19 – Suite de bits de la zone TIA pour l'information d'asservissement F_0

PF = 0		PF = 1	
Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	0010011101	0	0010011101
1	0101011001	1	0101011001
2	0101101001	2	0101100101
3	0010011101	3	0010011101
4	0101011001	4	0101011001
5	0101101001	5	0101100101
6	0010011101	6	0010011101
7	0101011001	7	0101011001
8	0101101001	8	0101100101

Tableau 20 – Suite de bits de la zone TIA pour l'information d'asservissement F_1

PF = 0		PF = 1	
Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	0111001000	0	0111001000
1	0101011011	1	0101011011
2	0101101011	2	0101100111
3	1000110111	3	1000110111
4	0101011011	4	0101011011
5	0101101001	5	0101100101
6	0111001000	6	0111001000
7	1010100100	7	1010100100
8	1010010100	8	1010011000

Tableau 21 – Suite de bits de la zone TIA pour l'information d'asservissement F_2

PF = 0		PF = 1	
Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	0111001000	0	0111001000
1	0101011011	1	0101011011
2	0101101011	2	0101100111
3	1000110111	3	1000110111
4	1010100100	4	1010100100
5	1010010100	5	1010011000
6	0111001000	6	0111001000
7	0101011011	7	0101011011
8	0101101011	8	0101100111

7.2.5 Postambule ITI

Avant l'enregistrement, la suite de données du postambule ITI doit être définie comme dans les Tableaux 22 à 24 conformément aux signaux pilotes basse fréquence. La longueur du postambule ITI, telle qu'elle est enregistrée sur la bande, doit être de 280 bits.

Tableau 22 – Suite de bits du postambule ITI pour l'information d'asservissement F_0

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	1000101110	10	1000101110	20	1000101110
1	1000101110	11	1000101110	21	1000101110
2	1000101110	12	1000101110	22	1000101110
3	1000101110	13	1000101110	23	1000101110
4	1000101110	14	1000101110	24	1000101110
5	1000101110	15	1000101110	25	1000101110
6	1000101110	16	1000101110	26	1000101110
7	1000101110	17	1000101110	27	1000101110
8	1000101110	18	1000101110		
9	1000101110	19	1000101110		

Tableau 23 – Suite de bits du postambule ITI pour l'information d'asservissement F_1

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	0010001110	10	1101110001	20	1101110001
1	1101110001	11	1101110001	21	1101110001
2	1101110001	12	1101110001	22	1101110001
3	1101110001	13	1101110001	23	1000101110
4	1101110001	14	1000101110	24	0010001110
5	1000101110	15	0010001110	25	0010001110
6	0010001110	16	0010001110	26	0010001110
7	0010001110	17	0010001110	27	0010001110
8	0010001110	18	0010001110		
9	0010001110	19	1101110001		

Tableau 24 – Suite de bits du postambule ITI pour l'information d'asservissement F_2

Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB	Ordre de l'enregistrement	Mot code MSB LSB
0	1101110001	10	1101110001	20	0010001110
1	0010001110	11	1101110001	21	0010001110
2	0010001110	12	1101110001	22	1101110001
3	0010001110	13	0010001110	23	1101110001
4	1101110001	14	0010001110	24	1101110001
5	1101110001	15	0010001110	25	0010001110
6	1101110001	16	1101110001	26	0010001110
7	0010001110	17	1101110001	27	0010001110
8	0010001110	18	1101110001		
9	0010001110	19	0010001110		

7.3 Secteur audio

7.3.1 Structure

Le secteur audio est composé des éléments suivants:

- préambule audio;
- bloc de synchronisation audio;
- postambule audio.

Le bloc de synchronisation audio contient les éléments suivants:

- bloc de présynchronisation;
- bloc de synchronisation des données;
- bloc de postsynchronisation.

La Figure 23 montre la structure d'un secteur audio.

Les données audio dans le bloc de synchronisation audio sont décrites à l'Article 8. Le préambule et le postambule audio sont respectivement décrits en 7.3.2 et 7.3.4. Le bloc de synchronisation audio est décrit en 7.3.3.

7.3.2 Préambule audio


Deux types de mots de préambule audio sont définis, comme cela est présenté ci-dessous:

MSB	LSB
Mot A: 0 0 0 1 1 1 0 0 0 1 1 1 0 0 0 0 1 1 1 0 0 0 1 1	
Mot B: 1 1 1 0 0 0 1 1 1 0 0 0 1 1 1 1 1 0 0 0 1 1 1 0 0	

Avant l'enregistrement, un mot de préambule doit être choisi dans les deux séquences ci-dessus en fonction des critères décrits en 7.1.3.2. La longueur du préambule audio, telle qu'elle est enregistrée sur la bande, doit être de 400 bits.

7.3.3 Bloc de synchronisation audio

Trois composantes, deux blocs de présynchronisation, 14 blocs de synchronisation des données et un bloc de postsynchronisation constituent la structure globale d'un bloc de synchronisation audio. Chacun des deux blocs de présynchronisation se compose d'un mot de synchronisation de deux octets et d'un mot d'ID de quatre octets comprenant ID0, ID1, IDP et ID2. Le bloc de postsynchronisation se compose d'un mot de synchronisation de deux octets et d'un mot d'ID de quatre octets comprenant ID0, ID1, IDP et ID3. Le bloc de synchronisation des données audio se compose d'un mot de synchronisation de deux octets, d'un ID de trois octets et de 85 octets de données audio incluant la parité interne ou de 85 octets de données incluant la parité externe et interne, comme cela est représenté à la Figure 24.

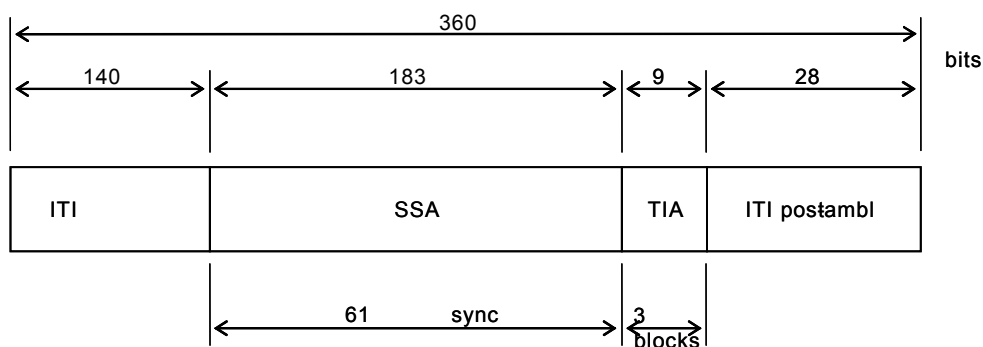


IEC 1880/05

Légende

Anglais	Français
ITI preamble	Préambule ITI
ITI post-amble	Postambule ITI
61 sync blocks	61 blocs de synchronisation
3 sync blocks	3 blocs de synchronisation

Figure 23 – Structure d'un secteur audio

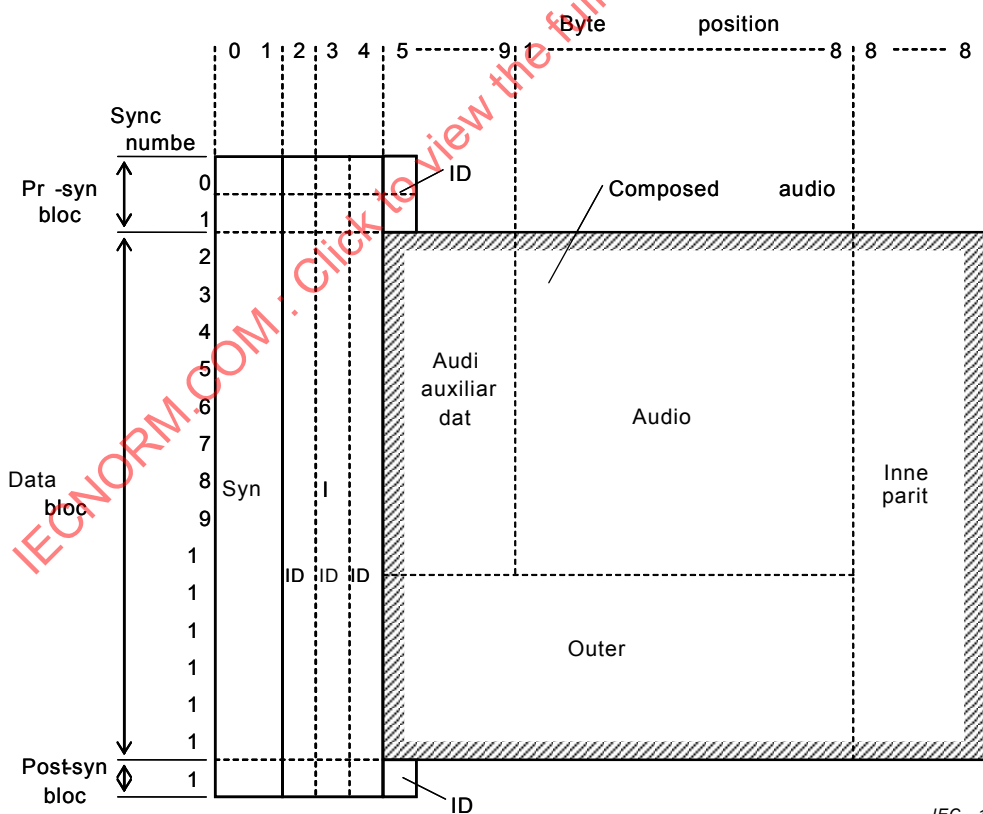

IEC 1881/05

NOTE Sync dans les positions de bits 0 et 1 indique la position. C'est un mot de 17 bits comme spécifié en 7.3.3.1.

Légende

Anglais	Français
Byte position number	Numéro de position d'octet

Anglais	Français
Sync block number	Numéro de bloc de synchronisation
Pre-sync block	Bloc de pré-synchronisation
Composed audio data	Données audio composées
Data sync block	Bloc de synchronisation des données
Audio auxiliary data	Données audio auxiliaire
Audio data	Données audio
Inner parity	Parité interne
Outer	Externe
Post-sync block	Bloc de postsynchronisation

Figure 24 – Structure des blocs de synchronisation dans le secteur audio

7.3.3.1 Synchronisation

Deux types de mots de synchronisation sont définis comme ci-dessous:

MSBLSB

Mot de synchronisation F: 0 0 0 1 1 1 1 1 1 1 1 1 0 0 0 1

Mot de synchronisation G: 1 1 1 0 0 0 0 0 0 0 0 0 1 1 1 0

Un mot de synchronisation à enregistrer doit être choisi dans les deux séquences ci-dessus selon les critères définis en 7.1.3.2. La longueur de synchronisation doit être de 17 bits comme l'enregistrement sur bande.

7.3.3.2 ID

L'ID se compose des données d'ID (ID₀, ID₁) de 2 octets et de la parité d'ID (IDP) de 1 octet. Comme cela est indiqué aux Tableaux 25 à 28, les données d'ID se composent des ID d'application audio (AP₁₂, AP₁₁, AP₁₀), du numéro de paire de piste (Trp₃, Trp₂, Trp₁, Trp₀) et du numéro de bloc de synchronisation (Syb₇, Syb₆, Syb₅, Syb₄, Syb₃, Syb₂, Syb₁, Syb₀).

– ID₀

L'ID₀ contient les informations définies au Tableau 25. La longueur de l'ID₀ doit être de 8 bits avant modulation. L'ID d'application audio doit être tel qu'il est défini au Tableau 26. Le numéro de paire de piste doit être tel qu'il est défini au Tableau 27 ou 28.

Tableau 25 – ID₀ dans le secteur audio

	Numéro de bloc de synchronisation 0, 1, 11 à 16	Numéro de bloc de synchronisation 2 à 10
Bit 7	AP ₁₂	Arb
Bit 6	AP ₁₁	Arb
Bit 5	AP ₁₀	Arb
Bit 4	Arb	Arb
Bit 3	Trp ₃	Trp ₃
Bit 2	Trp ₂	Trp ₂
Bit 1	Trp ₁	Trp ₁
Bit 0	Trp ₀	Trp ₀

Tableau 26 – ID d'application audio

Id d'application audio			Type de format
AP1 ₂	AP1 ₁	AP1 ₀	
0	0	0	Non utilisé
0	0	1	Format D-7
0	1	0	Réservé
0	1	1	
1	0	0	
1	0	1	
1	1	0	
1	1	1	Non utilisé

Tableau 27 – Numéro de paire de piste pour le format à 25 Mb/s

Numéro de piste	Numéro de paire de piste							
	Système 525/60				Système 625/50			
	Trp ₃	Trp ₂	Trp ₁	Trp ₀	Trp ₃	Trp ₂	Trp ₁	Trp ₀
0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0
2	0	0	0	1	0	0	0	1
3	0	0	0	1	0	0	0	1
4	0	0	1	0	0	0	1	0
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
9	0	1	0	0	0	1	0	0
10	N'existe pas				0	1	0	1
11					0	1	0	1

NOTE Numéros de piste comme indiqué à la Figure 10 ou 11.

Tableau 28 – Numéro de paire de piste pour le format à 50 Mb/s

Numéro de piste	Numéro de paire de piste							
	Système 525/60				Système 625/50			
	Trp ₃	Trp ₂	Trp ₁	Trp ₀	Trp ₃	Trp ₂	Trp ₁	Trp ₀
0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0
2	0	0	0	1	0	0	0	1
3	0	0	0	1	0	0	0	1
4	0	0	1	0	0	0	1	0
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:
19	1	0	0	1	1	0	0	1
20	N'existe pas				1	0	1	0
21					1	0	1	0
22					1	0	1	1
23					1	0	1	1

NOTE Numéros de piste comme indiqué à la Figure 12 ou 13.

– ID1

L'ID1 contient le numéro de bloc de synchronisation défini comme suit:

MSB

LSB

Syb ₇	Syb ₆	Syb ₅	Syb ₄	Syb ₃	Syb ₂	Syb ₁	Syb ₀
------------------	------------------	------------------	------------------	------------------	------------------	------------------	------------------

La longueur de l'ID1 doit être de 8 bits avant modulation.

Les numéros de bloc de synchronisation doivent être entre 0 et 16, comme cela est représenté à la Figure 24.

La modulation doit être appliquée avec ID1, IDP et ID2 ou ID3, ou avec les premières données audio, comme cela est représenté à la Figure 15. Les opérations suivantes doivent être exécutées.

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3;
- IDP.

IDP est un octet de parité de ID0 et ID1. La longueur de l'IDP doit être de 8 bits avant modulation.

IDP est défini comme un code BCH (12, 8, 3) dont le polynôme générateur est $X^4 + X + 1$. Le code ID est divisé en deux mots codes d'ID (ID-CW0, ID-CW1). L'attribution de bits des mots codes d'ID est indiquée au Tableau 29.

ID-CW0: C14, C12, C10, C8, C6, C4, C2, C0, P6, P4, P2, P0

ID-CW1: C15, C13, C11, C9, C7, C5, C3, C1, P7, P5, P3, P1

Les bits de parité P0 à P7 sont donnés par les équations suivantes:

$$\begin{aligned} P6 &= C14 \oplus C10 \oplus C6 \oplus C4 \\ P4 &= C14 \oplus C12 \oplus C8 \oplus C4 \oplus C2 \\ P2 &= C14 \oplus C12 \oplus C10 \oplus C6 \oplus C2 \oplus C0 \\ P0 &= C12 \oplus C8 \oplus C6 \oplus C0 \\ P7 &= C15 \oplus C11 \oplus C7 \oplus C5 \\ P5 &= C15 \oplus C13 \oplus C9 \oplus C5 \oplus C3 \\ P3 &= C15 \oplus C13 \oplus C11 \oplus C7 \oplus C3 \oplus C1 \\ P1 &= C13 \oplus C9 \oplus C7 \oplus C1 \end{aligned}$$

où $\oplus$ est le symbole d'un «ou» exclusif.

La modulation doit être effectuée avec ID1, IDP et ID2 ou ID3, ou avec les premières données audio, comme cela est représenté à la Figure 15. Les opérations suivantes doivent être exécutées.

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3.

Tableau 29 – Attribution de bits des mots codes d'ID

Numéro de position d'octet			
	2 ID0	3 ID1	4 IDP
MSB	C15	C7	P7
	C14	C6	P6
	C13	C5	P5
	C12	C4	P4
	C11	C3	P3
	C10	C2	P2
	C9	C1	P1
LSB	C8	C0	P0

7.3.3.3 ID supplémentaire (ID2, ID3)

Le numéro de position d'octet 5 du bloc de présynchronisation (ID2) doit être réglé sur F0_h avant modulation. Le numéro de position d'octet 5 du bloc de postsynchronisation (ID3) doit être réglé sur FF_h avant modulation.

Les opérations suivantes doivent être effectuées sur un ID complémentaire avec ID1, IDP et ID2 ou ID3, ou avec les premières données audio:

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3.

7.3.3.4 Données audio composées

Comme cela est représenté à la Figure 24, les données audio composées contiennent les données audio, les données audio auxiliaires, le code d'erreur interne et le code d'erreur externe.

La longueur des données audio composées doit être de 85 octets. En incluant les deux derniers octets de l'ID, la longueur des données audio composées doit être de 87 octets, divisible en sections d'une longueur de 3 octets pour un traitement supplémentaire, comme cela est indiqué ci-dessous:

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3.

7.3.4 Postamble audio

Le postamble audio doit être le même que le préambule audio décrit en 7.3.2, à l'exception de la longueur. La longueur du postamble audio, telle qu'elle est enregistrée sur la bande, doit être de 500 bits. Les opérations suivantes doivent être exécutées.

- tirage aléatoire: aucun;
- modulation 24-25: voir 7.1.3.2;
- précodage: aucun.

7.4 Secteur vidéo

7.4.1 Structure

Le secteur vidéo contient les éléments suivants:

- préambule vidéo;
- bloc de synchronisation vidéo;
- postamble vidéo.

Le bloc de synchronisation vidéo contient les éléments suivants:


- bloc de présynchronisation;
- bloc de synchronisation des données;
- bloc de postsynchronisation.

La Figure 25 montre la structure du secteur vidéo.

Les données vidéo dans le bloc de synchronisation de données sont décrites à l'Article 9. Le préambule et le postamble vidéo sont respectivement décrits en 7.4.2 et 7.4.3.5. Le bloc de synchronisation vidéo est décrit en 7.4.3.

7.4.2 Préambule vidéo

Le mot de préambule vidéo doit être le même que celui du préambule audio décrit en 7.3.2. La longueur du préambule vidéo doit être de 400 bits comme l'enregistrement sur bande.

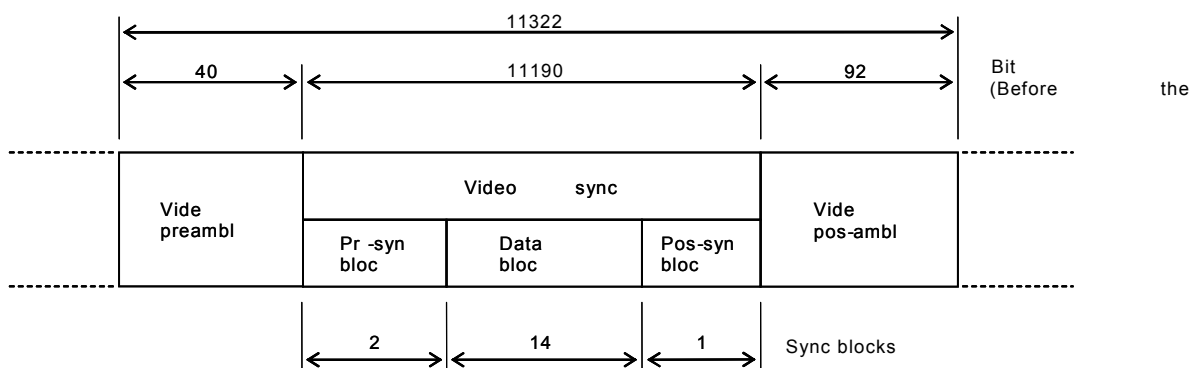

Légende

Anglais	Français
Bits before the	Bits avant l'enregistrement
Video preamble	Préambule vidéo
Video sync	Bloc de synchronisation vidéo
Video post-amble	Postambule vidéo
Pr-syn block	Bloc de présynchronisation
Data blocks	Bloc de données
Post-syn block	Bloc de postsynchronisation
Syn blocks	Blocs de synchronisation

Figure 25 – Structure du secteur vidéo

7.4.3 Bloc de synchronisation vidéo

Trois composantes, deux blocs de présynchronisation, 149 blocs de synchronisation des données et un bloc de postsynchronisation constituent la structure globale d'un bloc de synchronisation vidéo. Chacun des deux blocs de présynchronisation se compose d'un mot de synchronisation de 2 octets et d'un mot d'ID de 4 octets comprenant ID0, ID1, IDP et ID2. Le bloc de postsynchronisation se compose d'un mot de synchronisation de 2 octets et d'un mot d'ID de 4 octets comprenant ID0, ID1, IDP et ID3. Chaque bloc de synchronisation des données comprend soit 1) un mot de bloc de synchronisation sur 2 octets, un ID sur 3 octets, 77 octets de données et 8 octets de parité interne, soit 2) un mot de bloc de synchronisation sur 2 octets, un ID sur 3 octets, 77 octets de parité externe et 8 octets de parité interne, comme représenté à la Figure 26.

7.4.3.1 Synchronisation

La synchronisation doit être la même que la synchronisation audio décrite en 7.3.3.1. La longueur de synchronisation doit être de 17 bits comme l'enregistrement sur bande.

7.4.3.2 ID


L'ID se compose des données d'ID (ID0, ID1) de 2 octets et de la parité d'ID (IDP) de 1 octet. Les données d'ID se composent de l'ID d'application vidéo (AP2₂, AP2₁, AP2₀), du numéro de paire de piste (Trp₃, Trp₂, Trp₁, Trp₀) et du numéro de bloc de synchronisation (Syb₇, Syb₆, Syb₅,, Syb₀).

– ID0

L'ID0 contient les informations données au Tableau 30. La longueur de l'ID0 doit être de 8 bits avant modulation.

L'ID d'application vidéo doit être tel que cela est spécifié au Tableau 31. Le numéro de paire de piste doit être le même que celui qui est indiqué au Tableau 27 ou 28. Les opérations suivantes doivent être exécutées.

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: aucune;
- précodage: voir 7.1.3.3.

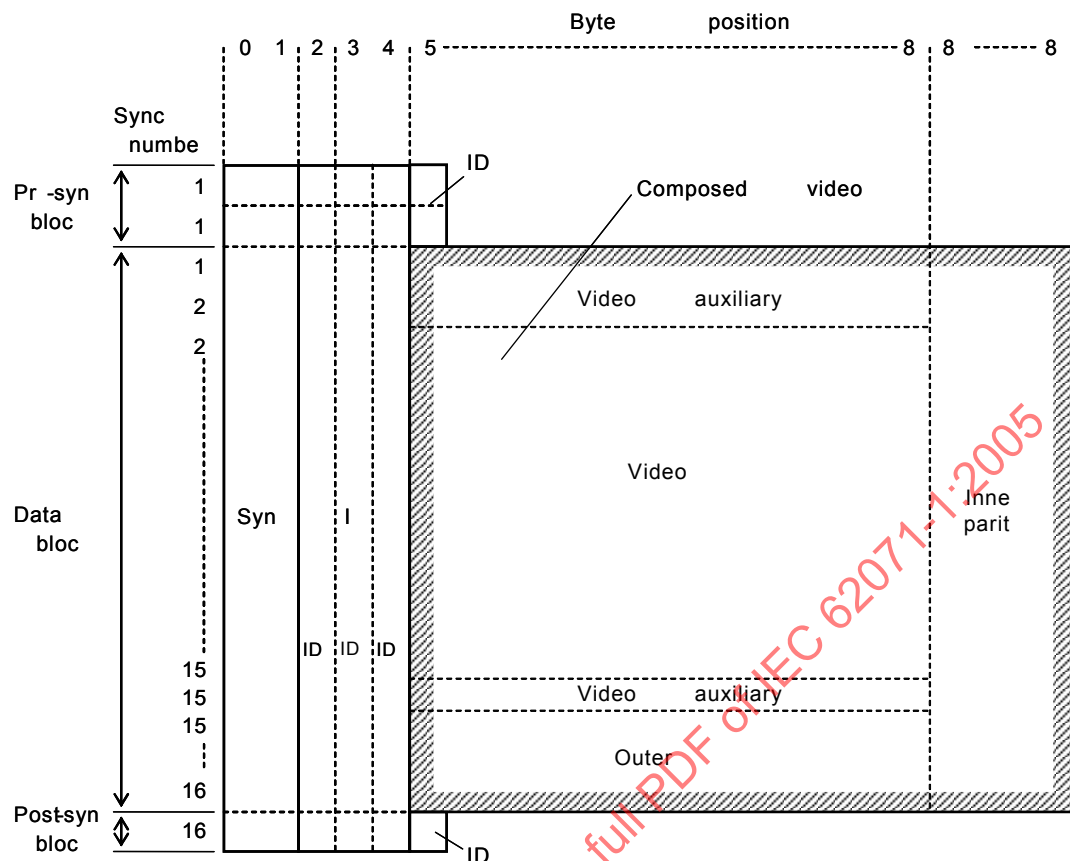

IEC 1883/05

NOTE Sync dans les positions de bits 0 et 1 indique la position. C'est un mot de 17 bits comme spécifié en 7.3.3.1.

Légende

Anglais	Français
Byte position number	Numéro de position d'octet
Sync block number	Numéro de bloc de synchronisation
Pre-sync block	Bloc de pré-synchronisation
Composed video data	Données vidéo composées
Video auxiliary data	Données vidéo auxiliaire
Data sync block	Bloc de synchronisation des données
Video data	Données vidéo
Inner parity	Parité interne
Video auxiliary data	Données vidéo auxiliaire
Outer	Externe
Post-sync block	Bloc de postsynchronisation

Figure 26 – Structure des blocs de synchronisation dans le secteur vidéo

Tableau 30 – Données d'ID dans le secteur vidéo

Position de bit	Numéro de bloc de synchronisation 17 à 18 et 157 à 168		Numéro de bloc de synchronisation 19 à 156	
	ID0	ID1	ID0	ID1
b7	AP2 ₂	Syb ₇	Arb	Syb ₇
b6	AP2 ₁	Syb ₆	Arb	Syb ₆
b5	AP2 ₀	Syb ₅	Arb	Syb ₅
b4	Arb	Syb ₄	Arb	Syb ₄
b3	Trp ₃	Syb ₃	Trp ₃	Syb ₃
b2	Trp ₂	Syb ₂	Trp ₂	Syb ₂
b1	Trp ₁	Syb ₁	Trp ₁	Syb ₁
b0	Trp ₀	Syb ₀	Trp ₀	Syb ₀

– **ID1**

L'ID1 contient le numéro de bloc de synchronisation défini comme suit:

MSB				LSB			
Syb ₇	Syb ₆	Syb ₅	Syb ₄	Syb ₃	Syb ₂	Syb ₁	Syb ₀

La longueur de l'ID1 doit être de 8 bits avant modulation.

Les numéros de bloc de synchronisation doivent être entre 17 et 168, comme cela est représenté à la Figure 26.

La longueur des données vidéo composées doit être de 85 octets avant modulation.

La modulation doit être effectuée avec ID1, IDP et ID2 ou ID3, ou avec les premières données vidéo et/ou en être suivie tous les 3 octets de données vidéo, comme cela est représenté à la Figure 16. Les opérations suivantes doivent être exécutées.

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3.

– **IDP**

L'IDP doit être le même que celui indiqué en 7.3.3.1. La longueur de l'IDP doit être de 8 bits avant modulation.

La longueur des données vidéo composées doit être de 85 octets avant modulation.

La modulation doit être effectuée avec ID1, IDP et ID2 ou ID3, ou avec les premières données vidéo et/ou en être suivie tous les trois octets de données vidéo, comme cela est représenté à la Figure 16. Les opérations suivantes doivent être exécutées.

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3.

Tableau 31 – ID d'application vidéo

ID d'application vidéo			Type de format
AP2 ₂	AP2 ₁	AP2 ₀	
0	0	0	Non utilisé
0	0	1	D-7
0	1	0	Réservé
0	1	1	
1	0	0	
1	0	1	
1	1	0	
1	1	1	Non utilisé

7.4.3.3 ID supplémentaire (ID2, ID3)

Le numéro 5 de position d'octet des blocs de présynchronisation (ID2) doit être réglé à F0_h avant modulation. Le numéro 5 de position d'octet du bloc de postsynchronisation (ID3) doit être réglé à FF_h avant modulation.

7.4.3.4 Données vidéo composées

Les données vidéo composées contiennent les données vidéo, les données vidéo auxiliaires, le code d'erreurs interne et le code d'erreurs externe, comme cela est représenté à la Figure 26.

La longueur des données vidéo composées doit être de 85 octets. En incluant les deux derniers octets d'ID, la longueur des données vidéo composées doit être de 87 octets, divisibles en sections d'une longueur de 3 octets pour traitement supplémentaire, comme cela est décrit ci-dessous:

- tirage aléatoire: voir 7.1.3.1;
- modulation 24-25: voir 7.1.3.2;
- précodage: voir 7.1.3.3.

7.4.3.5 Postambule vidéo

Le postambule vidéo doit être le même que le préambule audio décrit en 7.3.2, à l'exception de la longueur.

La longueur du postambule vidéo, telle qu'elle est enregistrée sur la bande, doit être de 925 bits.

7.5 Secteur de sous-code

7.5.1 Structure

Le secteur de sous-code contient les éléments suivants:

- préambule de sous-code;
- bloc de synchronisation de sous-code;
- postambule de sous-code.

La Figure 27 montre la structure d'un secteur de sous-code.