

# INTERNATIONAL STANDARD

**ISO/IEC**  
**15802-1**

First edition  
1995-11-01

---

---

## **Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Common specifications —**

### **Part 1:** Medium Access Control (MAC) service definition

*Technologies de l'information — Télécommunications et échange  
d'information entre systèmes — Réseaux locaux et métropolitains —  
Spécifications communes —*

*Partie 1: Définition du Contrôle d'accès au support (MAC)*



Reference number  
ISO/IEC 15802-1:1995(E)

Contents	Page
Foreword.....	ii
Introduction .....	iii
1 Scope .....	1
2 Normative references .....	1
3 Definitions .....	2
3.1 Basic reference model definitions.....	2
3.2 Service conventions definitions.....	2
3.3 MAC Service definitions .....	2
4 Abbreviations .....	2
5 Conventions .....	3
5.1 General considerations .....	3
5.2 Parameters .....	3
6 Overview of the MAC Service .....	3
7 Types of MAC Service .....	4
8 Features of the MAC Service .....	4
9 Model of the MAC Service .....	4
9.1 Model of a MAC connectionless-mode transmission .....	4
9.2 Service provided by the connectionless-mode MAC Service .....	4
10 Quality of connectionless-mode service .....	5
10.1 Determination of QoS for connectionless-mode service .....	5
10.2 Definition of connectionless-mode QoS parameters.....	5
10.2.1 Transit delay.....	6
10.2.2 Residual error rate.....	6
10.2.3 Probability of lost information .....	6
10.2.4 Priority .....	6
11 Sequence of primitives at one MSAP .....	7
12 Data transfer .....	7
12.1 Function.....	7
12.2 Types of primitives and parameters.....	8
12.2.1 Addresses .....	8
12.2.2 Routing Information .....	10
12.2.3 MSDU.....	10
12.2.4 Priority.....	10
12.3 Sequence of primitives .....	10
<b>Annex A</b>	
Mapping of the MAC Service to/from ISO/IEC 8802-3, ISO/IEC 8802-4, ISO/IEC 8802-5, ISO/IEC 8802-6, ISO/IEC 8802-7 and ISO 9314-2 (FDDI) MAC Protocols .....	11
<b>Annex B</b>	
Bibliography.....	18

© ISO/IEC 1995  
All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to the national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 15802-1 was prepared by ISO/IEC JTC 1, *Information technology*.  
*Subcommittee SC 6, Telecommunications and information exchange between systems*.

ISO/IEC 15802 consists of the following parts under the general title *Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Common specifications*:

- Part 1: Medium Access Control (MAC) service definition
- Part 2: LAN/MAN management
- Part 3: Remote MAC bridging
- Part 4: System load protocol

Annex A of this part of ISO/IEC 15802 is for information only.

Introduction

ISO/IEC 15802 is one of a set of International Standards produced to facilitate the interconnection of information processing systems. It is related to other International Standards in the set as defined by ISO/IEC 7498-1. The reference model described by ISO/IEC 7498-1 subdivides the area of standardization for Open Systems Interconnection (OSI) into a series of layers and allows for each layer to be further divided into sublayers.

This part of ISO/IEC 15802 defines the service provided by the Medium Access Control Sublayer to the Logical Link Control Sublayer at the boundary between the Medium Access Control and Logical Link Control Sublayers. The Medium Access Control and Logical Link Control Sublayers are sublayers of the Data Link Layer of the OSI Basic Reference Model as illustrated in figure 1. The Medium Access Control Sublayer is not described in ISO/IEC 7498-1 but is of value in the specification of ISO/IEC 8802 Local Area Networks.

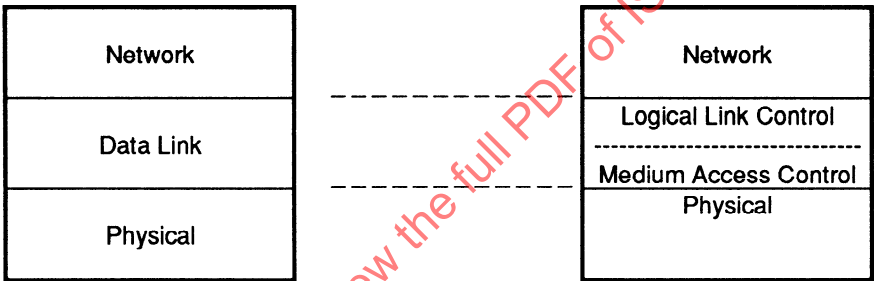


Figure 1 - Relationship of the Medium Access Control and Logical Link Control Sublayer to the OSI Data Link Layer

This part of ISO/IEC 15802 provides a definition of the MAC Service made available to the MAC Service user by the action of a Medium Access Control Protocol over the underlying service. The relationship is illustrated in figure 2.

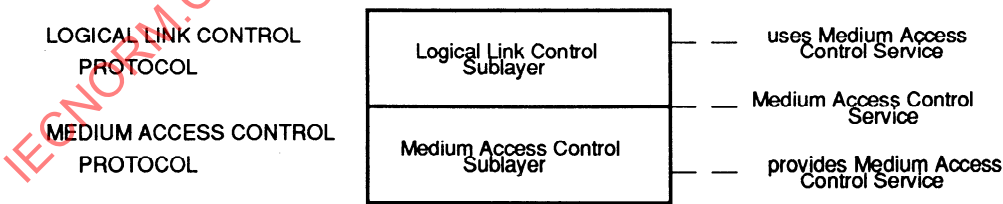


Figure 2 - Relationship of this part of ISO/IEC 15802 to other International Standards

Throughout the set of International Standards, the term "service" refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the MAC Service defined in this part of ISO/IEC 15802 is a conceptual architectural service, independent of administrative divisions.

# Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Common specifications -

## Part 1:

## Medium Access Control (MAC) service definition

### 1 Scope

This part of ISO/IEC 15802 defines the Medium Access Control Service found in local area network architecture in abstract terms of

- a) the primitive actions and events of the service;
- b) the parameters associated with each primitive action and event, and the form they take; and
- c) the interrelationship between, and the valid sequences of, these actions and events.

The principal objectives of this part of ISO/IEC 15802 are

- a) to specify the characteristics of a conceptual Medium Access Control Service;
- b) guide the development of Medium Access Control Protocols; and
- c) guide the development of OSI protocols which make use of the MAC Service.

This part of ISO/IEC 15802 does not specify individual implementation or products, nor does it constrain the implementation of Medium Access Control entities and interfaces within an information processing system.

There is no conformance of equipment to this part of ISO/IEC 15802. Instead, conformance is achieved through implementation of conforming Medium Access Control Protocols that fulfil the Medium Access Control Service defined in this part of ISO/IEC 15802.

### 2 Normative references

The following International Standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 15802. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 15802 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 7498-1 : 1994, *Information technology - Open Systems Interconnection - Basic Reference Model: The Basic Model*.

ISO 7498-3 : 1989, *Information processing systems - Open Systems Interconnection - Basic Reference Model - Part 3: Naming and addressing*.

ISO/IEC 10731:1994, *Information technology - Open Systems Interconnection - Basic Reference Model - Conventions for the definition of OSI services*.

### 3 Definitions

For the purposes of this part of ISO/IEC 15802, the following definitions apply.

#### 3.1 Basic reference model definitions

Although the MAC Service is not identified or defined in the OSI Basic Reference Model, this part of ISO/IEC 15802 is based on the concepts developed in the Basic Reference Model and makes use of the following terms defined in ISO/IEC 7498, as they might apply to the Medium Access Control Sublayer:

- a) Entity
- b) Sublayer
- c) Service
- d) Service-access-point
- e) Service-access-point-address
- f) Service-data-unit
- g) Subnetwork address

#### 3.2 Service conventions definitions

Although the MAC Service is not identified or defined in the OSI Basic Reference Model, this part of ISO/IEC 15802 makes use of the following terms defined in ISO/IEC 10731, as they might apply to the Medium Access Control Sublayer:

- a) Service user
- b) Service provider
- c) Primitive
- d) Request
- e) Indication

#### 3.3 MAC Service definitions

- 3.3.1 group-address; group-MSAP-address; group Medium Access Control Service-access-point address:** A value, otherwise valid as a Medium Access Control Service-access-point address, identifying a set of Medium Access Control Service-access-points, the set of end systems on which the identified Service-access-points are located being any subset of all stations on a particular local area network.

NOTE - By contrast, the general definition of an (N)-address restricts the identified Service-access-point to a single open system.

### 4 Abbreviations

LAN	Local Area Network
MAC	Medium Access Control
MSAP	Medium Access Control Service-access-point
MSDU	Medium Access Control Service-data-unit
OSI	Open Systems Interconnection
QoS	Quality of Service
OUI	Organizationally Unique Identifier

## 5 Conventions

### 5.1 General considerations

This part of ISO/IEC 15802 uses the descriptive conventions given in ISO/IEC 10731.

The service model, service primitives, and time-sequence diagrams used are entirely abstract descriptions; they do not represent a specification for implementation.

### 5.2 Parameters

Service primitives, used to represent service user/service provider interactions (ISO/IEC 10731), convey parameters which indicate information available in the user/provider interaction, and have a global significance.

The parameters which apply to each group of MAC Service primitives are set out in table 1. Each "X" in the table indicates that the primitive labelling the column in which it falls shall carry the parameter labelling the row in which it falls.

Some entries are further qualified by items in parentheses. These are

- a) A parameter specific constraint:

(=) indicates that the value supplied in an indication primitive is always identical to that supplied in a previous request primitive issued at the peer service-access-point.

- b) Indication that some note applies to the entry:

(see note x) indicates that the referenced note contains additional information pertaining to the parameter and its use.

In any particular interface, not all parameters need be explicitly stated. Some may be implicitly associated with the MSAP at which the primitive is issued, for example, an MA-UNITDATA.request need not include the source address parameter which may be associated with the MSAP at which the primitive is issued.

## 6 Overview of the MAC Service

The MAC Service provides for the transparent transfer of data between MAC Service users. It makes invisible to these MAC Service users the way in which supporting communications resources are utilised to achieve this transfer, except when the MAC Service provider supports the MAC Service user specifying Routing Information.

In particular, the MAC Service provides for the following:

- a) Independence of the underlying MAC Sublayer and Physical Layer - the MAC Service relieves MAC Service users from all concerns, with the exception of QoS considerations, regarding which MAC technology is available.
- b) Transparency of transferred information - the MAC Service provides for the transparent transfer of MAC Service user-data. It does not restrict the content, format or coding of the information, nor does it ever need to interpret its structure or meaning. It may however restrict the maximum number of octets of MAC Service user-data that can be supplied in a user/provider interaction.
- c) Priority selection - the MAC Service makes available to MAC Service users a means to request the transfer of data at a specified priority.
- d) Addressing - the MAC Service provides the means for the MAC Service user to identify itself and to specify the MSAP to which data is to be transferred.
- e) Routing Information - the MAC Service allows the user optionally to specify the route to the destination MSAP.

## 7 Types of MAC Service

Currently there is one type of MAC Service defined; the connectionless-mode MAC Service.

## 8 Features of the MAC Service

The MAC Service provides the following features to the MAC Service user:

- a) A means by which MSDUs of limited length are delimited and transparently transmitted from one source MSAP to a destination MSAP in a single MAC Service access, without establishing or later releasing a connection.
- b) Associated with each instance of connectionless-mode transmission certain measures of QoS, which may be requested by the sending MAC Service user when the connectionless-mode transmission is initiated and may be modified by the MAC Service provider depending on the MAC technology.

## 9 Model of the MAC Service

Although the MAC Service is not identified or defined in the OSI Basic Reference Model, this part of ISO/IEC 15802 uses the abstract model for a layer service defined in ISO/IEC 10731, clause 4 as it might apply to the MAC Sublayer. The model defines the interactions between the MAC Service users and the MAC Service provider which take place at the two MSAPs. Information is passed between the MAC Service user and the MAC Service provider by service primitives, which may convey parameters.

### 9.1 Model of a MAC connectionless-mode transmission

A defining characteristic of MAC connectionless-mode service - as provided between any two MSAPs - can be modelled in the abstract as an association between the two MSAPs. This association is permanent.

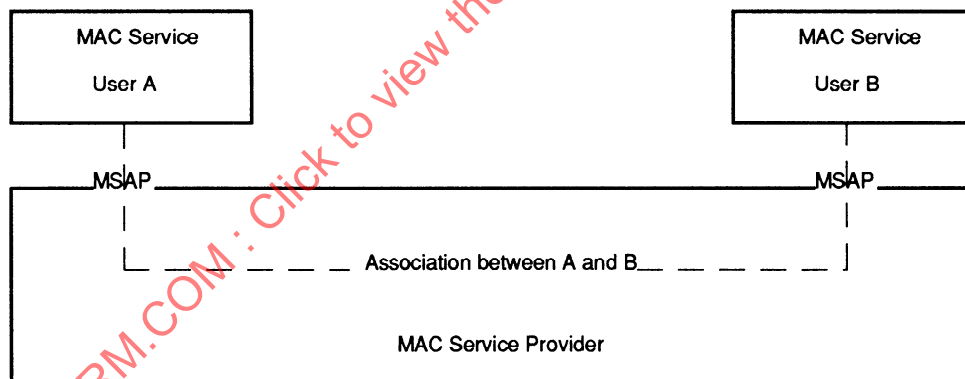


Figure 3 - Model for a MAC Service Connectionless-mode Transmission

Only one type of object, the unitdata object, can be handed over to the MAC Service provider via a MSAP. In figure 3, MAC Service user A represents the MAC Service user that passes objects to the MAC Service provider. MAC Service user B represents the MAC Service user that accepts objects from the MAC Service provider.

### 9.2 Service provided by the connectionless-mode MAC Service

In general, the MAC Service provider may perform any or all of the following actions

- a) discard objects;
- b) change the order of the objects.



The MAC Service exhibits a negligible rate of

- a) object duplication;
- b) reordering of objects for a given priority.

The operations that are performed by the MAC Service provider for a particular MAC association do not depend on the behaviour of the MAC Service users. Awareness of the characteristics of the MAC Service provided, e.g. the rate at which objects may be discarded, duplicated or miss-ordered is part of the MAC Service users' a priori knowledge of the environment.

## 10 Quality of connectionless-mode service

The term "Quality of Service" (QoS) refers to certain characteristics of a connectionless-mode transmission as observed between the MSAPs. QoS describes aspects of a connectionless-mode transmission which are solely attributable to the MAC Service provider; it can only be properly determined in the absence of MAC Service user behaviour (which is beyond the control of the MAC Service provider) that specifically constrains or impedes the performance of the MAC Service.

Whether the view of the QoS during each instance of the use of connectionless-mode transmission is the same to each MAC Service user associated with the service depends on the nature of their association and the type of information concerning the nature of the service made available to the MAC Service user(s) by the MAC Service provider prior to the invocation of the service.

### 10.1 Determination of QoS for connectionless-mode service

A basic characteristic of a connectionless-mode service is that, unlike a connection-mode service, no dynamic association similar to that during a connection establishment is set up between the parties involved. Thus, characteristics of the service to be provided during the transfer are not negotiated on a peer-to-peer basis.

Associated with each MAC connectionless-mode transmission, certain measures of QoS are requested by the sending MAC Service user when the primitive action is initiated. The requested measures (or parameter values and options), are based on a priori knowledge by the MAC Service user of the service(s) made available to it by the MAC Service provider. Knowledge of the characteristics and type of service provided (i.e., the parameters, formats, and options that affect the transfer of data) is made available to a MAC Service user through some layer management interaction prior to (any) invocation of the MAC connectionless-mode service. Thus, the MAC Service user not only has knowledge of the parties with which it may communicate, it also has explicit knowledge of the characteristics of the service it can expect to be provided with for each invocation of the service.

### 10.2 Definition of connectionless-mode QoS parameters

QoS parameters can be classified as

- a) parameters that express MAC Service performance, for example
  - Transit Delay;
  - Residual Error Rate (corruption, duplication);
  - Probability of Lost Information.
- b) parameters that express other MAC Service characteristics, for example
  - Priority.

Some QoS parameters are defined in terms of the issuance of MAC Service primitives. Reference to a MAC Service primitive refers to the complete execution of that MAC Service primitive at the appropriate MSAP.

10.2.1 Transit delay

Transit delay is the elapsed time between MA-UNITDATA.request primitives and the corresponding MA-UNITDATA.indication primitives. Elapsed time values are calculated only on MSDUs that are transferred successfully.

Successful transfer of a MSDU is defined to occur when the MSDU is transferred from the sending MAC Service user to the intended receiving MAC Service user without error.

For connectionless-mode transfer, transit delay is specified independently for each MAC connectionless-mode transmission.

The transit delay for transfer of MSDUs between a given pair of MAC Service users is bounded, and the value of this maximum transit delay is part of the QoS knowledge made available to the MAC Service users.

10.2.2 Residual error rate

Residual error rate is the ratio of the number of MSDUs received containing undetected errors to the number of MSDUs transferred across the MAC Service boundary during a measurement period. The relationship among these quantities is defined, for a particular MAC Service user pair, as shown in figure 4.

10.2.3 Probability of lost information

Probability of Lost Information is the ratio of the number of lost MSDUs to the number of MSDUs transferred across the MAC Service boundary during a measurement period. The relationship among these quantities is defined, for a particular MAC Service user pair, as shown in figure 4.

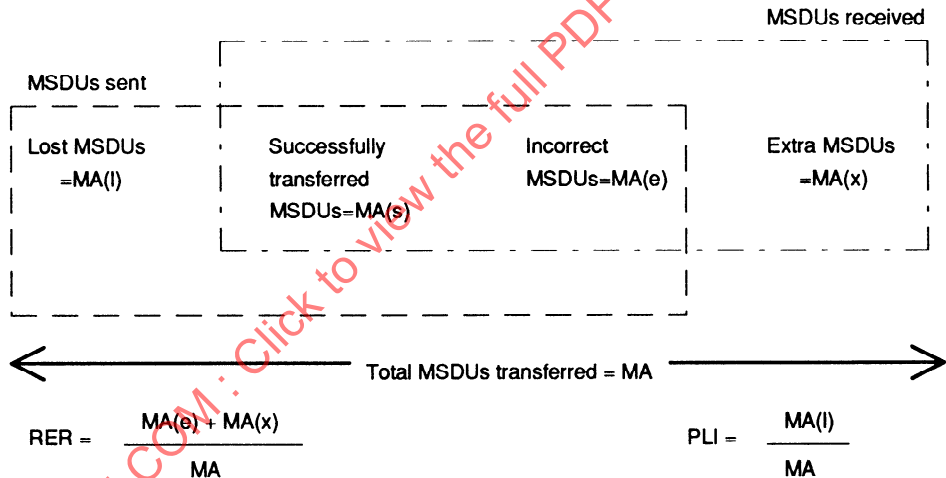


Figure 4: Components of Residual Error Rate (RER) and Probability of Lost Information (PLI)

10.2.4 Priority

The specification of priority is concerned with the relationship between connectionless-mode data transfer invocations.

This parameter specifies the relative importance of unitdata objects with respect to gaining use of shared resources.

This parameter only has meaning in the context of some management entity or structure able to judge relative importance. The number of priority levels is limited.

## 11 Sequence of primitives at one MSAP

The possible overall allowed sequences of primitives at a MSAP are defined in the state transition diagram in figure 5.

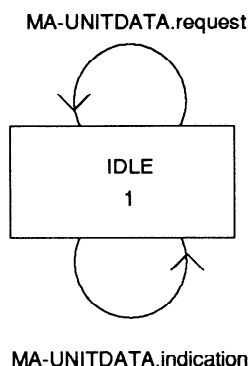


Figure 5 - State transition diagram for sequences of connectionless-mode primitive at one MSAP

## 12 Data transfer

### 12.1 Function

MAC connectionless-mode transmission service primitives can be used to transmit an independent, self contained MSDU from one MSAP to another MSAP in a single service access. It is self contained in that all of the information required to deliver the MSDU is presented to the MAC Service provider in a single service access; thus no initial establishment or subsequent release of a connection is required, provided that the MAC Service users exist and are known to the MAC Service provider.

A MSDU transmitted using MAC connectionless-mode transmission is not considered by the MAC Service provider to be related in any way to any previously transmitted MSDU. Although the MAC Service maintains the integrity of individual MSDUs, it does not necessarily deliver them to the receiving MAC Service user in the order in which they are presented by the sending MAC Service user.

No means are provided by which the receiving MAC Service user may control the rate at which the sending MAC Service user may send MSDUs (peer-to-peer flow control). The MAC Service provider will not maintain any state information relative to any aspect of the flow control of information between any specific combination of MSAPs.

12.2 Types of primitives and parameters

Table 1 indicates the types of primitives and parameters needed for the connectionless-mode data transmission service.

Table 1 - MAC connectionless-mode data transfer primitives and parameters

Parameter	Primitive	
	MA-UNITDATA request	MA-UNITDATA indication
Destination Address	X	X(=)
Source Address	X	X(=)
Routing Information	X	X (see NOTE 2)
MSDU	X	X(=)
Priority	X	X (see NOTE 1)
<div>Notes:</div> <div><div>1</div><div>The relationship between the priority parameter in the indication primitive to that in the request primitive is dependent on the protocol(s) used to provide and support the MAC Service.</div></div> <div><div>2</div><div>The value of the Routing Information parameter in the indication primitive may not be identical to the value of the Routing Information parameter supplied in the corresponding request primitive issued at the peer service-access-point.</div></div>		

12.2.1 Addresses

The addresses referred to in table 1 are MAC addresses. The source address specifies an individual MSAP. The destination address specifies either an individual or group MSAP.

12.2.1.1 Address length

The length of the MAC address field in a MAC frame is either 16 bits, or 48 bits. In ISO/IEC 8802-6 there is also the option of a 64-bit MAC address field length, the 64-bit address field length is not covered further in this part of ISO/IEC 15802.

In ISO/IEC 8802 LANs/MANs at any given time, the address lengths are the same for all stations on a particular local area network. The length of the address field is determined by management facilities or on a priori knowledge basis. It should be noted that it is intended to remove 16-bit address lengths from the ISO/IEC 8802 LAN/MAN standards.

In ISO 9314-2 (FDDI) LANs 16-bit and 48-bit address length stations can co-exist on the same local area network. Although 16-bit and 48-bit address length stations can co-exist on the same local area network, any individual MAC frame shall have the same length Destination and Source Address fields. The length of the address fields is indicated in the ISO 9314-2 MAC frame.

12.2.1.2 Individual/Group addresses

An Individual address identifies a single MSAP and may be used as both a source and destination MAC address. For 16-bit and 48-bit address fields, the broadcast address is defined to be all address bits set to 1, denoting the set of all MSAPs. The individual address of an MSAP is also the subnetwork address of the LAN station on which the MAC entity and MAC Service user are located.

A group address shall be used only as a destination MAC address. A group address is either

- A Multicast Group Address, which indicates a group of MSAPs; or
- A Broadcast Address, which indicates all MSAPs on a particular local area network.

For both 16-bit and 48-bit addresses, the left most bit of the Binary Representation of a MAC address is designated the I/G (Individual/Group) bit. If the I/G bit is 0 the address is an Individual address, if the I/G is set to 1 the address is a Group address.

12.2.1.3 Universally/Locally administered addresses

A Universally administered address is one where part of the address is allocated by a registration authority to an organization and is unique to that organization. The remainder of the address is allocated by the receiving organization.

A Locally administered address is one where there is no registration authority allocating unique values for part of the address space.

In ISO/IEC 8802 LANs and FDDI the registration authority for the Universally administered addresses is the American National Standards Institute Accredited Standards Committee, IEEE Standards Board. For 48-bit MAC addresses, the next bit following the I/G bit of the Binary Representation of a MAC address is designated the U/L (Universally/Locally administered) address bit. If the U/L bit is set to 0 the address is a Universally administered address, if the U/L bit is set to 1 the address is a Locally administered address. In the case of 16-bit MAC addresses the concept of Universally administered addresses is not applicable and all addresses are Locally administered.

12.2.1.4 Binary and Hexadecimal Representation of MAC addresses

Figure 6 illustrates an example of a 48-bit LAN MAC address in the Binary and the Hexadecimal Representation.

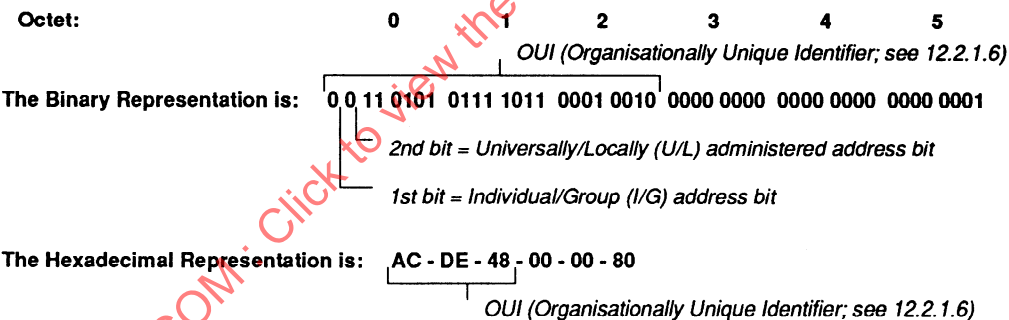


Figure 6 - Binary and Hexadecimal representation of LAN MAC addresses

The 48-bit LAN MAC address (universal or local) is represented as a string of six octets. The octets are displayed from left to right, in the order that they are transmitted and received by peer MAC Sublayer entities. Each octet of the address is displayed as two hexadecimal digits. The left-most bit of the Binary Representation of a MAC address distinguishes individual from group addresses. The Universally or Locally (U/L) administered address bit is the next bit following the Individual/Group address bit. The U/L bit indicates whether the MAC address has been universally or locally assigned. For the previous example, the first octet transmitted is AC and the last octet transmitted is 80.

12.2.1.5 Own MAC addressed frames

In ISO/IEC 8802 LANs If the local MSAP is designated by the destination address parameter of an MA-UNITDATA.request primitive, the indication primitive is also invoked by the MAC entity to the MAC Service user. For example, all frames transmitted to the broadcast address also invoke MA-UNITDATA.indication primitives at all MSAPs in the local area network including the station that generated the request. This full duplex characteristic of the MAC Service may be due to unique functionality within the MAC Sublayer or the full duplex characteristics of the lower layers.

In ISO 9314-2 (FDDI) LANs If the local MSAP is designated by the destination address parameter of an MA-UNITDATA.request primitive, the indication primitive may optionally be invoked by the MAC entity to the MAC Service user.

12.2.1.6 Organizationally Unique Identifier

Organizationally Unique Identifiers allow a general means of assuring unique identifiers for a number of purposes. Currently, the IEEE assigns Organizationally Unique Identifiers to be used for generating individual LAN MAC addresses, group addresses, and protocol identifiers.

The Organizationally Unique Identifier (OUI) is the left-most 24 bits of the Binary Representation of a Universally administered MAC address; an example is shown in figure 6. The U/L bit of the MAC address being set to 0 indicates that the assignment is generated from an OUI and is therefore universal. Individual or group MAC addresses and protocol identifiers with the U/L bit set to 1 are locally assigned and have no relationship to the IEEE-assigned values. In the 48-bit Universally administered LAN MAC address the OUI is contained in octets 0, 1, and 2.

12.2.2 Routing Information

The Routing Information parameter specifies the desired route, between the originating MSAP and the destination MSAP, that the MAC frame should traverse. If the MAC Service provider does not support the routing information parameter, then the MAC Service provider will discard the MAC frame. The length of the Routing Information parameter can be from 0 to 30 octets inclusive. A null value for the routing information parameter, i.e. 0 octets, indicates that the originating MAC Service user is not requesting a desired route.

12.2.3 MSDU

This parameter allows the transmission of the MAC Service user data between MAC Service users, without modification by the MAC Service provider. The MAC Service user may transmit any integral number of octets greater than zero, up to a limit determined by the MAC Service provider. The value of this limit is made available to the MAC Service user by the use of management facilities or a priori knowledge.

12.2.4 Priority

If the MAC Service user does not explicitly state a value for the priority parameter, or requests a value not supported by the provider, the MAC Service provider shall use default values.

The value of the priority parameter in the two primitives are related so that

- a) in the request primitive, any defined value is allowed; and
- b) in the indication primitive, the priority indicated is the value requested or as modified by the MAC Service provider.

12.3 Sequence of primitives

The sequence of primitives in a successful MAC Sublayer connectionless-mode transmission is defined in the time sequence diagram in figure 7.

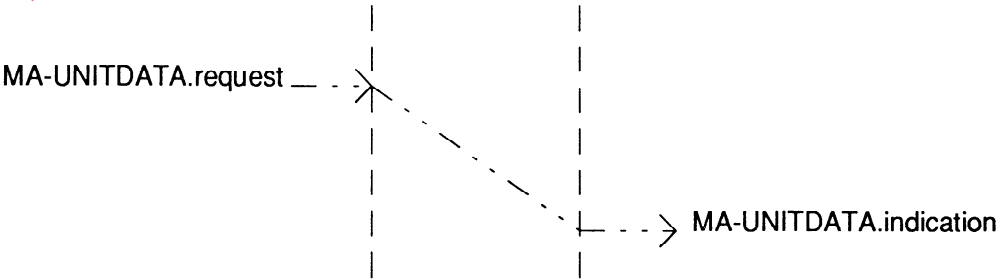


Figure 7 - Sequence of primitives

## **Annex A**

(informative)

### **Mapping of the MAC Service to/from ISO/IEC 8802-3, ISO/IEC 8802-4, ISO/IEC 8802-5, ISO/IEC 8802-6, ISO/IEC 8802-7 and ISO 9314-2 (FDDI) MAC Protocols**

#### **Introduction**

This annex specifies the mapping between elements of the MAC Service and elements of ISO/IEC 8802-3, ISO/IEC 8802-4, ISO/IEC 8802-5, ISO/IEC 8802-6, ISO/IEC 8802-7, and ISO 9314-2 (FDDI) MAC Sublayer protocols in clauses A.4, A.5, A.6, A.7, A.8 and A.9, respectively.

#### **A.1 Scope**

The MAC Service is defined in terms of primitive actions and events with associated parameters. For a protocol to support this service, there must be a mapping between the abstract primitives and parameters of the MAC Service and the elements of the protocol. This annex provides the mapping between elements of the MAC Service and the elements of the ISO/IEC 8802-3, ISO/IEC 8802-4, ISO/IEC 8802-5, ISO/IEC 8802-6, ISO 8802-7 and ISO 9314-2 (FDDI) MAC Protocols.

#### **A.2 General operation of MAC protocols to support the MAC Service**

As stated above, in order to support the MAC Service there must be a mapping between the abstract primitives and parameters of the MAC Service and the elements of the protocol. Request primitives are translated into MAC frames; received MAC frames, where appropriate, are translated into indication primitives.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15802-1:1995

A.3 Mapping the MAC Service to/from the ISO/IEC 8802-3 MAC Protocol

This clause specifies the mapping of the MAC Service to/from the ISO/IEC 8802-3 MAC Protocol.

A.3.1 Primitive/parameter and MAC frame field relationships

Figure A.1 shows the mapping of the MA-UNITDATA.request primitive and parameters to the ISO/IEC 8802-3 MAC frame fields, and the mapping of the ISO/IEC 8802-3 MAC frame fields to the MA-UNITDATA.indication primitive.

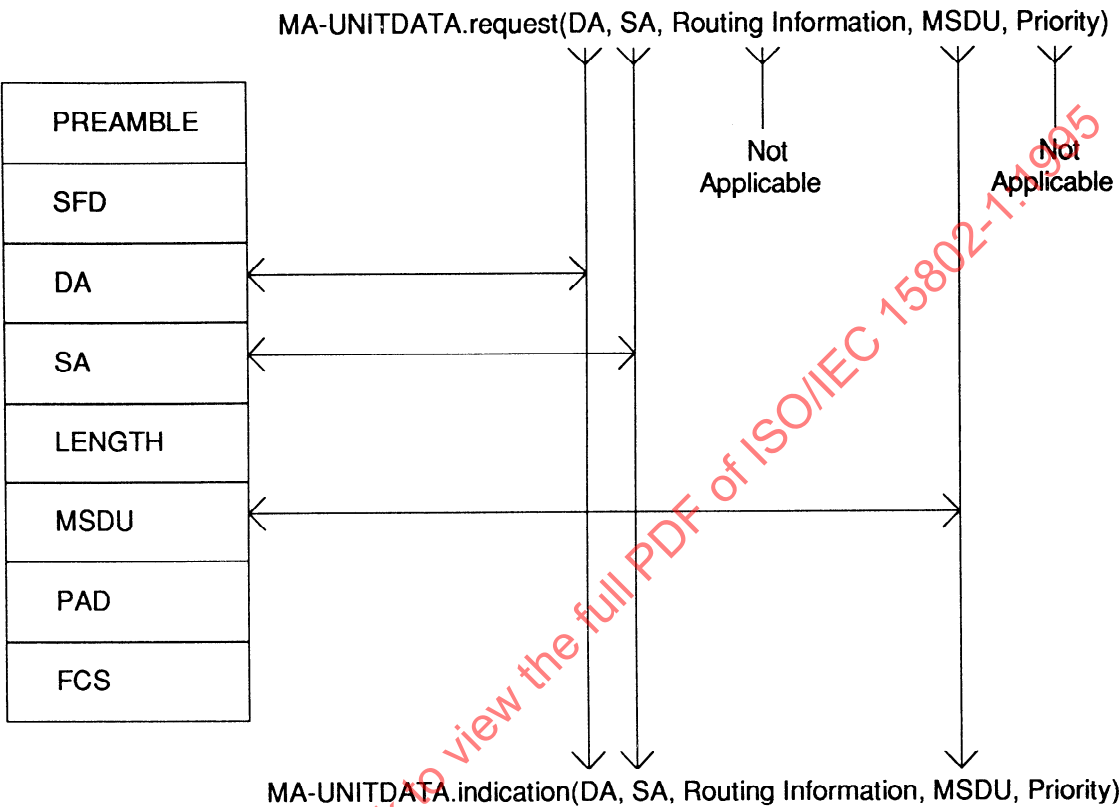


Figure A.1 - Mapping of MAC Service primitives to/from ISO/IEC 8802-3 MAC frames

The MAC frame structure is defined in ISO/IEC 8802-3.

The ISO/IEC 8802-3 MAC Protocol provides a single priority service regardless of the priority requested.

The ISO/IEC 8802-3 MAC Protocol does not provide the capability of transferring the requested priority to the remote MAC Service user.



A.4 Mapping the MAC Service to/from the ISO/IEC 8802-4 MAC Protocol

This clause specifies the mapping of the MAC Service to/from the ISO/IEC 8802-4 MAC Protocol.

A.4.1 Primitive/parameter and MAC frame field relationships

Figure A.2 shows the mapping of the MA-UNITDATA.request primitive and parameters to the ISO/IEC 8802-4 MAC frame fields, and the mapping of the ISO/IEC 8802-4 MAC frame fields to the MA-UNITDATA.indication primitive.

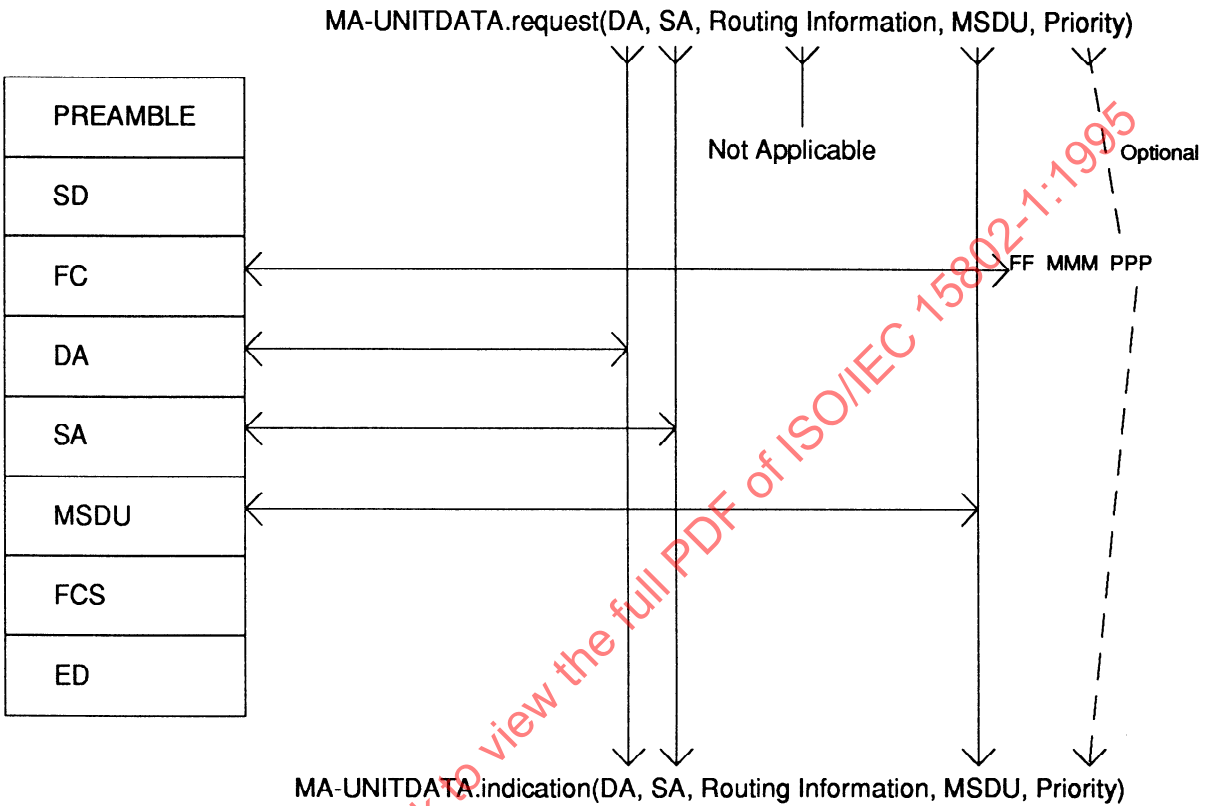


Figure A.2 - Mapping of MAC Service primitives to/from ISO/IEC 8802-4 MAC frames

The MAC frame structure is defined in ISO/IEC 8802-4.

In the ISO/IEC 8802-4 MAC Protocol the priority parameter in the MA-UNITDATA.indication primitive is equal to the priority parameter in the MA-UNITDATA.request primitive if priority is used.

A.5 Mapping the MAC Service to/from the ISO/IEC 8802-5 MAC Protocol

This clause specifies the mapping of the MAC Service to/from the ISO/IEC 8802-5 MAC Protocol.

A.5.1 Primitive/parameter and MAC frame field relationships

Figure A.3 shows the mapping of the MA-UNITDATA.request primitive and parameters to the ISO/IEC 8802-5 MAC frame fields, and the mapping of the ISO/IEC 8802-5 MAC frame fields to the MA-UNITDATA.indication primitive.

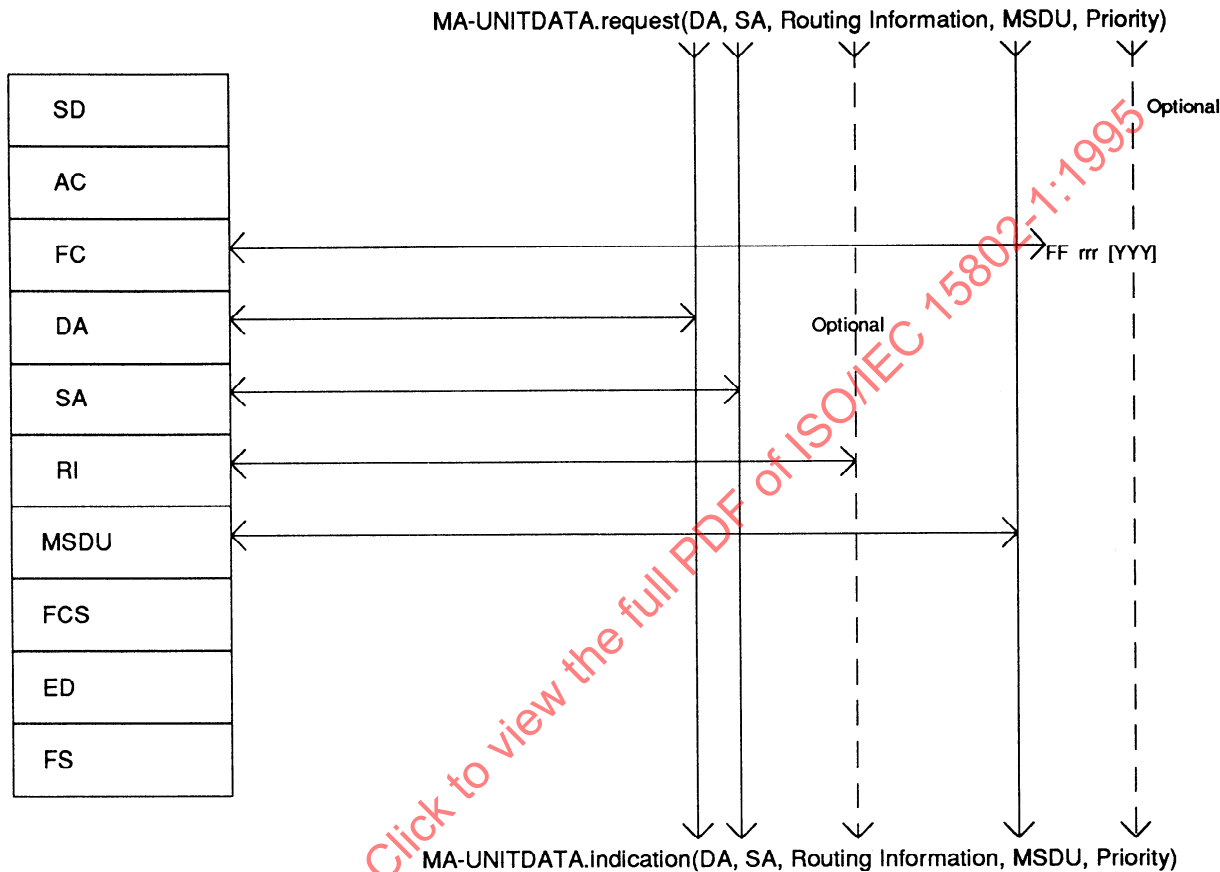


Figure A.3 - Mapping of MAC Service primitives to/from ISO/IEC 8802-5 MAC frames

The MAC frame structure is defined in ISO/IEC 8802-5.

In the ISO/IEC 8802-5 MAC Protocol the transfer of the user requested priority in the protocol is a provider option. If provided the priority parameter in the MA-UNITDATA.indication primitive is equal to the priority parameter in the corresponding MA-UNITDATA.request primitive.

A.6 Mapping the MAC Service to/from the ISO/IEC 8802-6 MAC Protocol

This clause specifies the mapping of the MAC Service to/from the ISO/IEC 8802-6 MAC Protocol.

A.6.1 Primitive/parameter and Initial MAC PDU field relationships

Figure A.4 shows the mapping of the MA-UNITDATA.request primitive and parameters to the ISO/IEC 8802-6 Initial MAC Protocol Data Unit fields, and the mapping of the ISO/IEC 8802-6 Initial MAC Protocol Data Unit fields to the MA-UNITDATA.indication primitive.

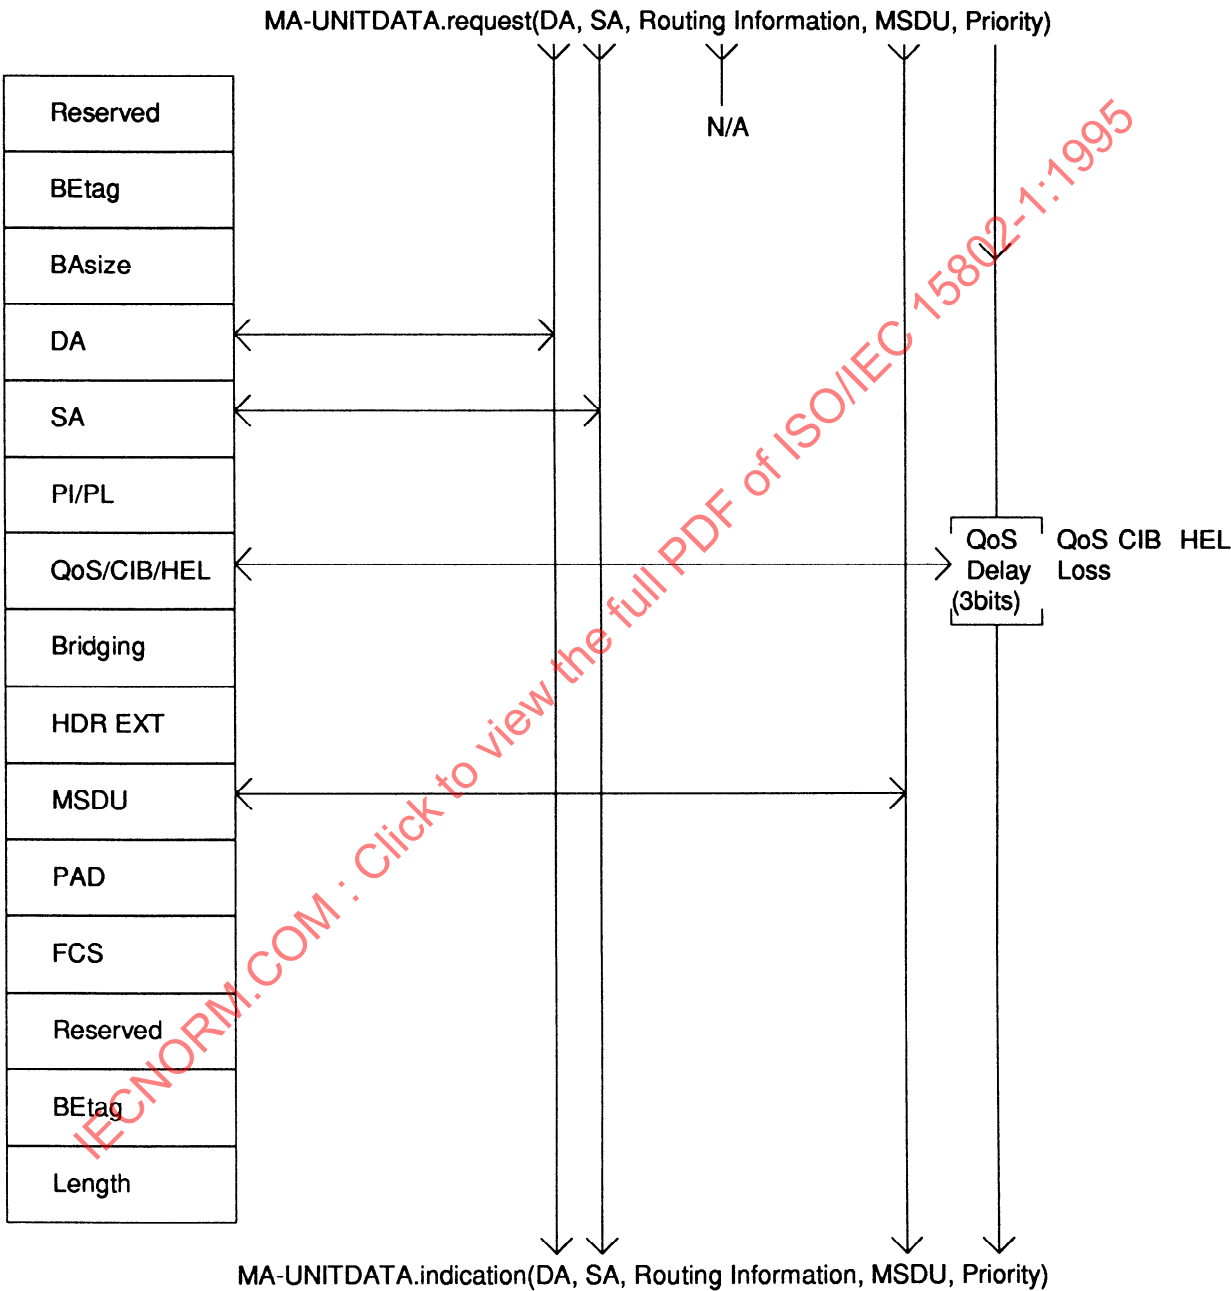


Figure A.4 - Mapping of MAC Service primitives to/from ISO/IEC 8802-6 Initial MAC Protocol Data Unit fields

The Initial MAC Protocol Data Unit structure is defined in ISO/IEC 8802-6.

In the ISO/IEC 8802-6 MAC Protocol the priority parameter in the MA-UNITDATA.indication primitive is equal to the priority parameter in the MA-UNITDATA.request primitive.