

AS3485


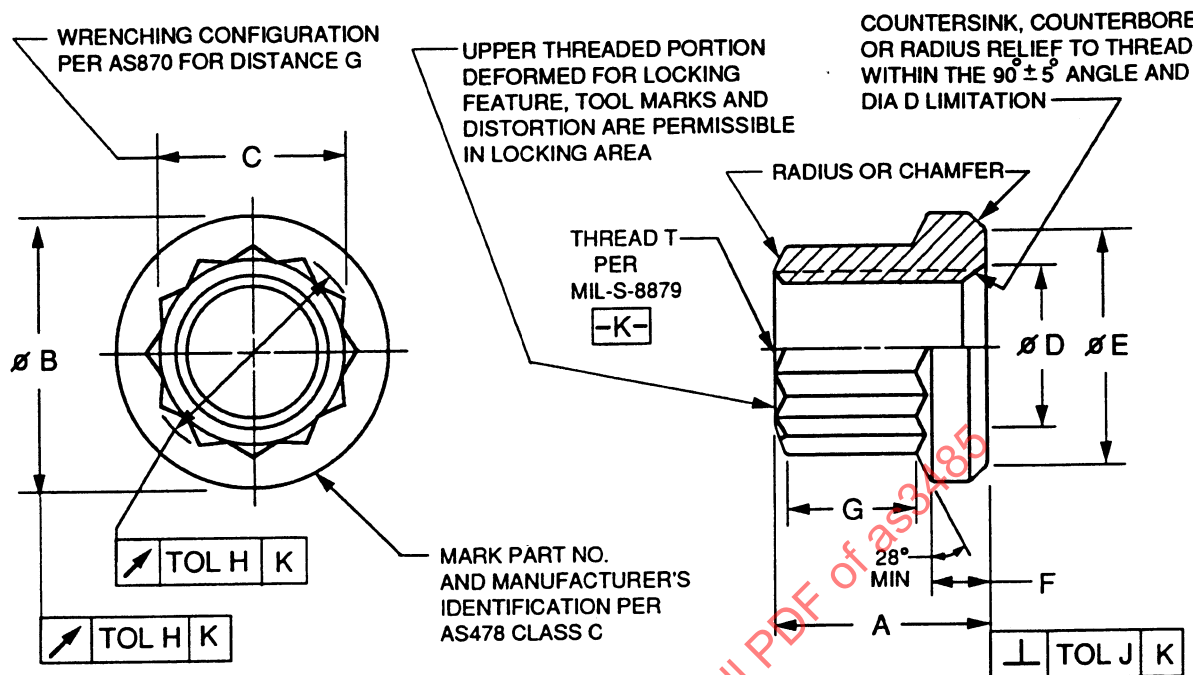


FIGURE 1

TABLE 1

| PART NUMBER | T THREAD | A +.005/- .010 | ϕB MAX | C NOM | ϕD MAX | ϕE MIN | F | G MIN | H | J | APPROX MASS LB/100 |
|-------------|-----------------|-------------------|-----------------|----------|-----------------|-----------------|-----------|----------|------|------|-----------------------|
| AS3485-09 | .1900-32UNJF-3B | .245 | .340 | .2500 | .220 | .310 | .035-.057 | .125 | .006 | .004 | .20 |
| AS3485-10 | .2500-28UNJF-3B | .317 | .430 | .3125 | .280 | .400 | .045-.057 | .185 | .007 | .005 | .40 |
| AS3485-11 | .3125-24UNJF-3B | .355 | .515 | .3750 | .345 | .485 | .055-.068 | .195 | .008 | .005 | .70 |
| AS3485-12 | .3750-24UNJF-3B | .453 | .589 | .4375 | .405 | .558 | .075-.100 | .250 | .009 | .005 | 1.00 |

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

NUT, SELF-LOCKING, 12 POINT,
REDUCED HEIGHT, SILVER PLATE,
UNS S66286

AS3485
SHEET 1 OF 2

Copyright 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: custsv@saec.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1993-08 REAFFIRMED 2004-07