

RATIONALE

TO PRODUCE A NEW PART WITH SILVER PLATED THREAD ONLY.

SAE AS3625

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


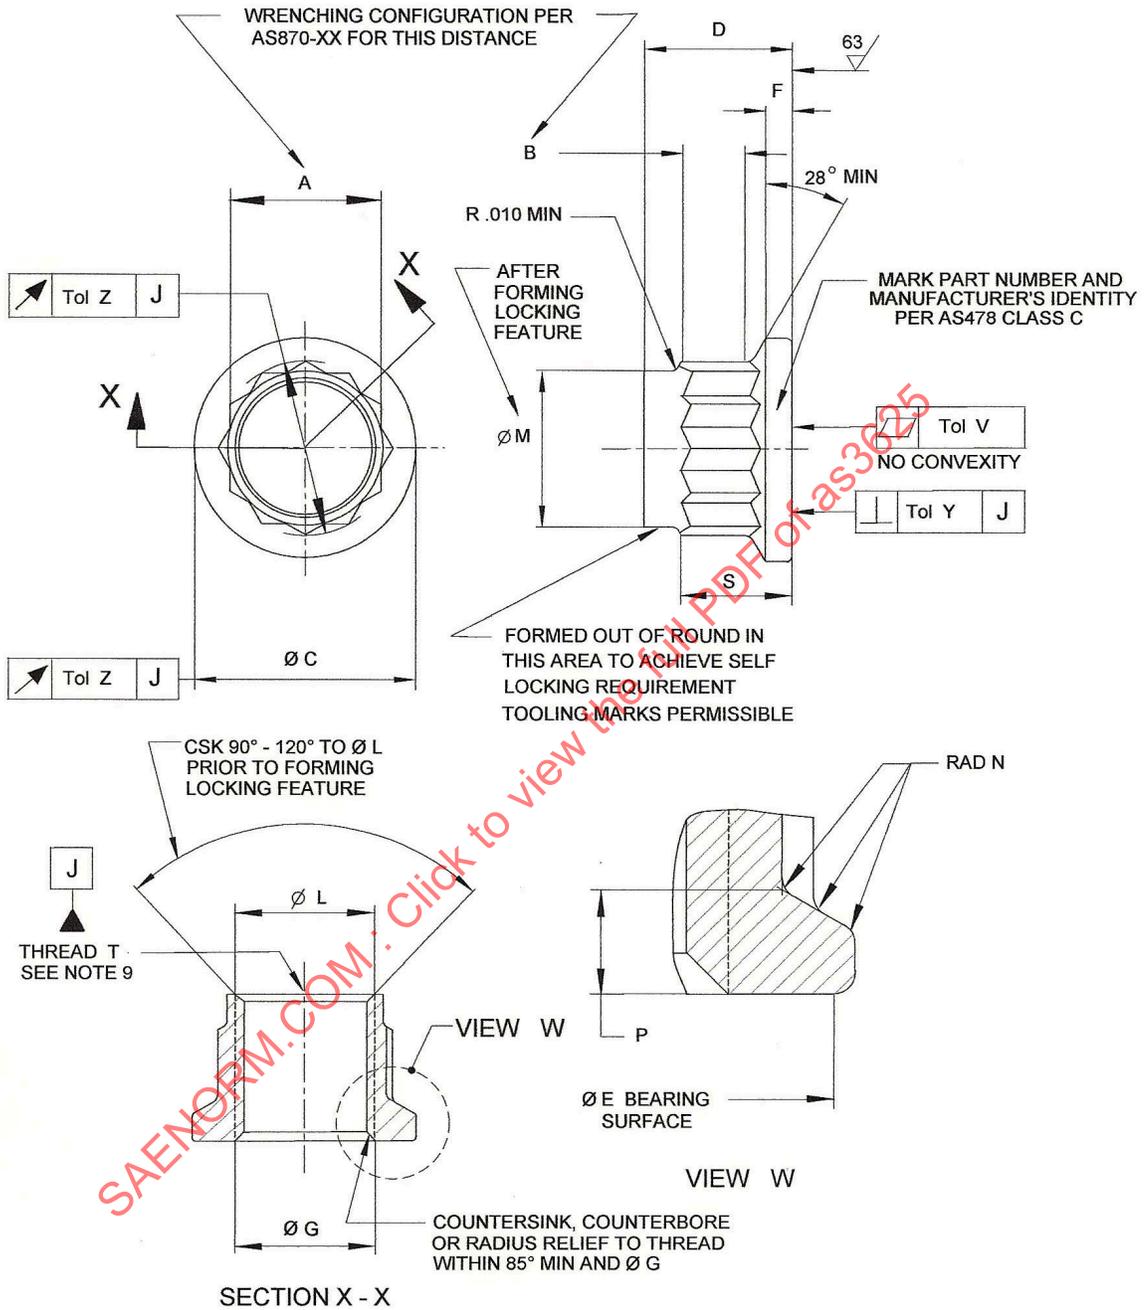


FIGURE 1- NUT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3625>



ISSUED 2011-06

CUSTODIAN: E25		PROCUREMENT SPECIFICATION: AS7251	
<p>An SAE International Group</p>	<p>AEROSPACE STANDARD</p> <p>NUT, SELF-LOCKING, DOUBLE HEXAGON, REDUCED ENVELOPE, UNS S66286 SILVER PLATED THREADS ONLY</p>		<p>SAE AS3625</p> <p>SHEET 1 OF 3</p>

TABLE 1A - DIMENSIONS T, AND A TO E

PART NUMBER	THREAD T PER AS8879	A		B MIN	C MAX	D	E MIN
		AS870 DASH NUMBER	NOMINAL SIZE				
AS3625-08	.1640-36 UNJF-3B	07	.2188	.070	.294	.230 - .250	.264
AS3625-09	.1900-32 UNJF-3B	08	.2500	.070	.355	.230 - .250	.325
AS3625-10	.2500-28 UNJF-3B	10	.3125	.095	.450	.308 - .328	.410
AS3625-11	.3125-24 UNJF-3B	12	.3750	.108	.535	.340 - .360	.495
AS3625-12	.3750-24 UNJF-3B	14	.4375	.147	.608	.438 - .458	.559
AS3625-13	.4375-20 UNJF-3B	18	.5625	.150	.692	.449 - .469	.652
AS3625-14	.5000-20 UNJF-3B	20	.6250	.176	.786	.548 - .568	.740
AS3625-15	.5625-18 UNJF-3B	22	.6875	.205	.880	.613 - .633	.840

TABLE 1B - DIMENSIONS F TO P

PART NUMBER	F	G	L	M MAX	N	P MAX
AS3625-08	.045 - .060	.164 - .194	.164 - .184	.229	.005 - .020	.090
AS3625-09	.045 - .060	.190 - .220	.190 - .210	.262	.005 - .030	.095
AS3625-10	.045 - .060	.250 - .280	.250 - .270	.326	.005 - .030	.110
AS3625-11	.060 - .075	.312 - .342	.312 - .332	.392	.005 - .035	.130
AS3625-12	.070 - .090	.375 - .405	.375 - .395	.458	.005 - .040	.150
AS3625-13	.080 - .100	.438 - .468	.438 - .458	.588	.005 - .040	.150
AS3625-14	.100 - .120	.500 - .535	.500 - .520	.654	.005 - .060	.180
AS3625-15	.110 - .130	.562 - .597	.562 - .582	.720	.005 - .070	.195

TABLE 1C - DIMENSIONS S TO Z, MASS

PART NUMBER	S	V	Y	Z	APPROX MASS lbs/100
AS3625-08	.135 - .175	.0012	.004	.005	.17
AS3625-09	.150 - .190	.0014	.004	.006	.22
AS3625-10	.190 - .235	.0014	.005	.007	.41
AS3625-11	.220 - .270	.0016	.005	.008	.70
AS3625-12	.270 - .330	.0016	.005	.009	.99
AS3625-13	.270 - .330	.0020	.006	.010	1.51
AS3625-14	.335 - .405	.0020	.006	.012	2.35
AS3625-15	.380 - .460	.0020	.007	.014	3.67

SAENORM.COM Click to view the full PDF of AS3625