

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS4409™

RATIONALE

FEDERAL SUPPLY CLASS
4730

SAFETY WIRE HOLES OPTION ADDED TO GRAPHICS. REVERT PROCUREMENT SPECIFICATION NOTE FROM QPL TO QML STATUS.

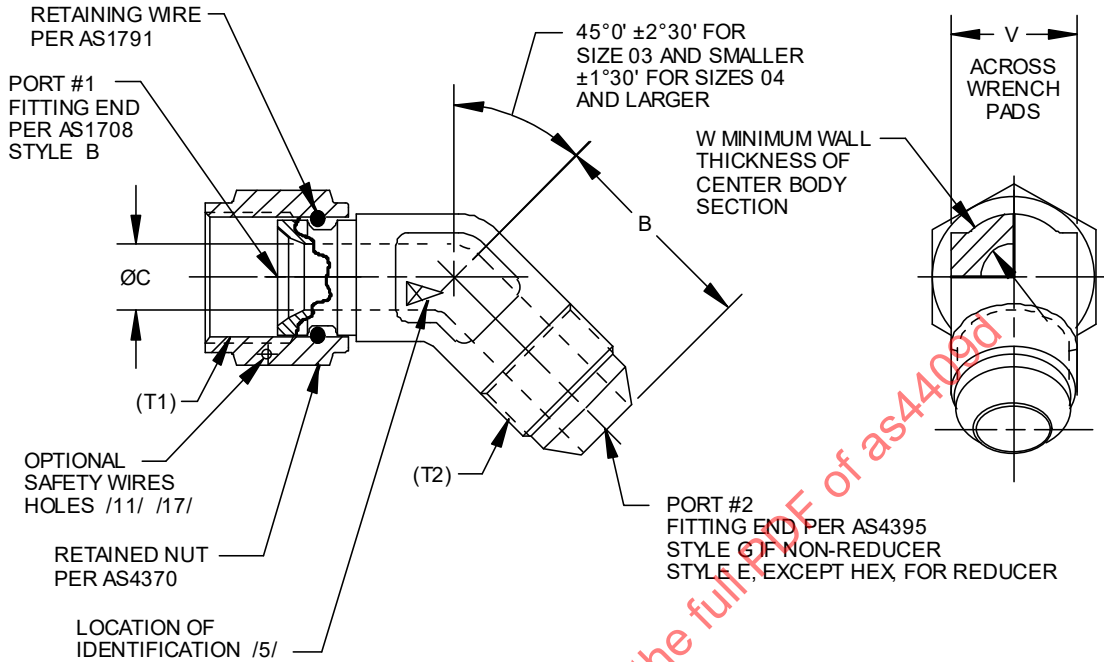


FIGURE 1 - FITTING ASSEMBLY, ELBOW 45°


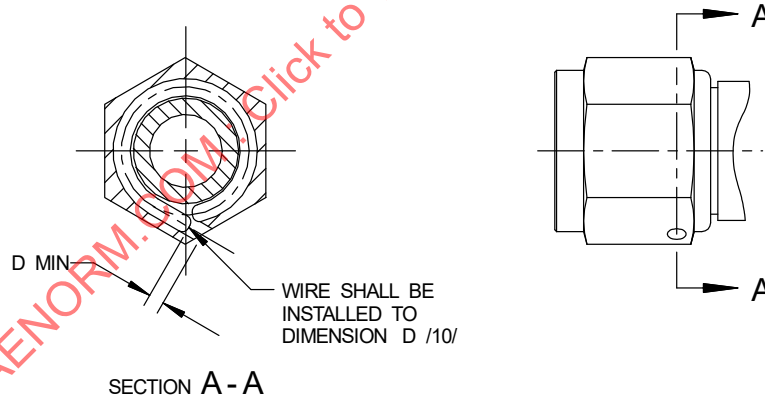


FIGURE 2 - INSTALLATION, RETAINED NUT AND RETAINING WIRE

NOT RECOMMENDED IN PART /18/

For more information on this standard, visit
<https://www.sae.org/standards/content/AS4409D/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: AS4841 /4/



AEROSPACE STANDARD

FITTING ASSEMBLY, ELBOW 45°,
REDUCER AND NONREDUCER,
INTERNAL FLARE TO FLARED TUBE

AS4409™
SHEET 1 OF 6

REV.
D

Copyright © 2024 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1995-03 REAFFIRMED 2007-10 REVISED 2024-06

TABLE 1 - DIMENSIONS C-W AND WEIGHTS

BASIC NO. AS4409 /17/ SIZE CODE	(NOMINAL TUBE SIZE)	T1, T2 THREAD PER AS8879 CLASS 3B, 3A	C	D	V	W	LB/EA APPROX REF ALUM	LB/EA APPROX REF CRES	LB/EA APPROX REF TI
02	.125	.3125-24 UNJF	.058- .065	.045	.297- .314	.090	.012	.034	.019
03	.188	.3750-24 UNJF	.121- .128	.045	.360- .377	.100	.021	.060	.034
04	.250	.4375-20 UNJF	.168- .175	.045	.423- .440	.110	.025	.072	.041
05	.312	.5000-20 UNJF	.230- .237	.045	.485- .502	.120	.032	.092	.053
06	.375	.5625-18 UNJF	.293- .301	.045	.547- .565	.120	.044	.123	.071
08	.500	.7500-16 UNJF	.387- .395	.055	.735- .753	.150	.077	.224	.140
10	.625	.8750-14 UNJF	.480- .488	.063	.860- .878	.170	.118	.343	.196
12	.750	1.0625-12 UNJ	.604- .614	.095	1.047-1.065	.185	.196	.570	.326
16	1.000	1.3125-12 UNJ	.839- .851	.125	1.292-1.317	.205	.294	.852	.488
20	1.250	1.6250-12 UNJ	1.073-1.086	.155	1.605-1.630	.240	.551	1.600	.916
24	1.500	1.8750-12 UNJ	1.307-1.320	.180	1.855-1.880	.250	.734	2.130	1.220
32	2.000	2.5000-12 UNJ	1.776-1.791	.180	2.542-2.572	.350	.961	2.790	1.598

TABLE 2 - LEG LENGTH A

SIZE OF PORT #1	FORG. SIZE /8/ 02	FORG. SIZE /8/ 03	FORG. SIZE /8/ 04	FORG. SIZE /8/ 05	FORG. SIZE /8/ 06	FORG. SIZE /8/ 08	FORG. SIZE /8/ 10	FORG. SIZE /8/ 12	FORG. SIZE /8/ 16	FORG. SIZE /8/ 20	FORG. SIZE /8/ 24	FORG. SIZE /8/ 32
02	.403	.414	.427	.439	.466	.504	.530	.596	.634	.699	.796	.940
03	--	.416	.430	.442	.469	.507	.533	.572	.637	.702	.799	.943
04	--	--	.438	.450	.477	.515	.541	.580	.645	.710	.807	.951
05	--	--	--	.492	.519	.557	.583	.622	.687	.752	.798	.998
06	--	--	--	--	.603	.641	.667	.706	.771	.836	.888	1.029
08	--	--	--	--	--	.749	.775	.814	.878	.943	.995	1.091
10	--	--	--	--	--	--	.825	.864	.927	.992	1.044	1.139
12	--	--	--	--	--	--	--	.828	.892	.957	1.009	1.139
16	--	--	--	--	--	--	--	--	.911	.976	1.028	1.191
20	--	--	--	--	--	--	--	--	--	1.023	1.075	1.284
24	--	--	--	--	--	--	--	--	--	--	1.155	1.327
32	--	--	--	--	--	--	--	--	--	--	--	1.483

TABLE 3 - LEG LENGTH B

SIZE OF PORT #2	FORG. SIZE /8/ 02	FORG. SIZE /8/ 03	FORG. SIZE /8/ 04	FORG. SIZE /8/ 05	FORG. SIZE /8/ 06	FORG. SIZE /8/ 08	FORG. SIZE /8/ 10	FORG. SIZE /8/ 12	FORG. SIZE /8/ 16	FORG. SIZE /8/ 20	FORG. SIZE /8/ 24	FORG. SIZE /8/ 32
02	.664	.633	.633	.671	.728	.783	.807	.873	1.013	1.091	1.154	1.341
03	--	.664	.655	.702	.759	.814	.838	.904	1.044	1.122	1.185	1.372
04	--	--	.726	.773	.830	.885	.909	.975	1.115	1.193	1.256	1.443
05	--	--	--	.773	.830	.885	.909	.975	1.115	1.193	1.256	1.443
06	--	--	--	--	.836	.891	.915	.981	1.121	1.199	1.262	1.449
08	--	--	--	--	--	.992	1.016	1.082	1.222	1.300	1.363	1.550
10	--	--	--	--	--	--	1.117	1.183	1.323	1.401	1.464	1.651
12	--	--	--	--	--	--	--	1.289	1.429	1.507	1.570	1.757
16	--	--	--	--	--	--	--	--	1.476	1.554	1.617	1.804
20	--	--	--	--	--	--	--	--	--	1.601	1.664	1.851
24	--	--	--	--	--	--	--	--	--	--	1.789	1.976
32	--	--	--	--	--	--	--	--	--	--	--	2.226

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

a. DASH AS CODE LETTER:

- (1) BODY: TYPE 4130 STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758.
- (2) NUT: DASH AS CODE LETTER OF AS4370 (TYPE 4130 STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

b. CODE LETTER D /18/:

- (1) BODY: TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS4133; OR TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6; OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR AMS4339.
- (2) NUT: CODE LETTER D OF AS4370 (TYPE 2024 ALUMINUM ALLOY).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

c. CODE LETTER J:

- (1) BODY: TYPE 304 CORROSION-RESISTANT STEEL FORGING OR BAR PER AMS5639 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER J OF AS4370 (TYPE 304 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

d. CODE LETTER K:

- (1) BODY: TYPE 316 CORROSION-RESISTANT STEEL FORGING OR BAR PER AMS5648 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER K OF AS4370 (TYPE 316 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

e. CODE LETTER R:

- (1) BODY: TYPE 321 CORROSION-RESISTANT STEEL BAR PER AMS5645 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER R OF AS4370 (TYPE 321 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

f. CODE LETTER S: /18/

- (1) BODY: TYPE 347 CORROSION-RESISTANT STEEL FORGING OR BAR PER AMS5646 OR AMS-QQ-S-763.
- (2) NUT: CODE LETTER S OF AS4370 (TYPE 347 CORROSION-RESISTANT STEEL).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

g. CODE LETTER T:

- (1) BODY: TYPE 6Al-4V TITANIUM ALLOY FORGING OR BAR PER AMS4928.
- (2) NUT: CODE LETTER T OF AS4370 (TYPE 6Al-4V TITANIUM ALLOY).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

	AEROSPACE STANDARD	AS4409™ SHEET 3 OF 6	REV. D
	FITTING ASSEMBLY, ELBOW 45°, REDUCER AND NONREDUCER, INTERNAL FLARE TO FLARED TUBE		

h. CODE LETTER W:

- (1) BODY: TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS4141; OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124; OR TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9.
- (2) NUT: CODE LETTER W OF AS4370 (TYPE 7075 ALUMINUM ALLOY).
- (3) WIRE: PER AS1791 (CLASS 302 OR 305 CORROSION-RESISTANT STEEL).

2. HEAT TREATMENT PER PROCUREMENT SPECIFICATION.

/3/ FINISH:

a. DASH AS MATERIAL CODE LETTER:

- (1) BODY: CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2, DYE BLACK.
- (2) NUT: DASH AS MATERIAL CODE LETTER OF AS4370 (CADMIUM PLATE, DYED BLACK).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

b. MATERIAL CODE LETTER D:

- (1) BODY: ANODIZE PER AMS2472 OR MIL-PRF-8625, TYPE II, CLASS 2, DYE BLUE, DUPLEX SEAL.
- (2) NUT: MATERIAL CODE LETTER D OF AS4370 (ANODIC COATING, DYE BLUE).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

c. MATERIAL CODE LETTER J:

- (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
- (2) NUT: MATERIAL CODE LETTER J OF AS4370 (PASSIVATED).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

d. MATERIAL CODE LETTER K:

- (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
- (2) NUT: MATERIAL CODE LETTER K OF AS4370 (PASSIVATED).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

e. MATERIAL CODE LETTER R:

- (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
- (2) NUT: MATERIAL CODE LETTER R OF AS4370 (PASSIVATED).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

f. MATERIAL CODE LETTER S:

- (1) BODY: PASSIVATE PER AMS2700, TYPE 6 OR TYPE 7.
- (2) NUT: MATERIAL CODE LETTER S OF AS4370 (PASSIVATED).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

g. MATERIAL CODE LETTER T:

- (1) BODY: ANODIZE PER AMS2488 TYPE 2 OR FLUORIDE PHOSPHATE CONVERSION COAT PER AMS2486.
- (2) NUT: MATERIAL CODE LETTER T OF AS4370 (FLUORIDE PHOSPHATE CONVERSION COAT).
- (3) WIRE: PER AS1791 (PASSIVATE AND COAT WITH DRY FILM LUBRICANT).

	AEROSPACE STANDARD	AS4409™ SHEET 4 OF 6	REV. D
	FITTING ASSEMBLY, ELBOW 45°, REDUCER AND NONREDUCER, INTERNAL FLARE TO FLARED TUBE		