

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-T-7928/5B, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-T-7928/5B, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as7928-5

AS7928/5

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 1999-04

PREPARED BY SAE SUBCOMMITTEE AE-8C2

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, SPLICE, ELECTRIC, (PERMANENT, TYPE II, CLASS 1) FOR 105°C TOTAL CONDUCTOR TEMPERATURE

AS7928/5
SHEET 1 OF 4

AS7928/5

THE COMPLETE REQUIREMENTS FOR PROCURING THE SPLICE DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-T-7928. MIL-T-7928/5 IS NOT FOR NAVY USE. FOR NAVY USE, USE MIL-S-81824 SPLICE.

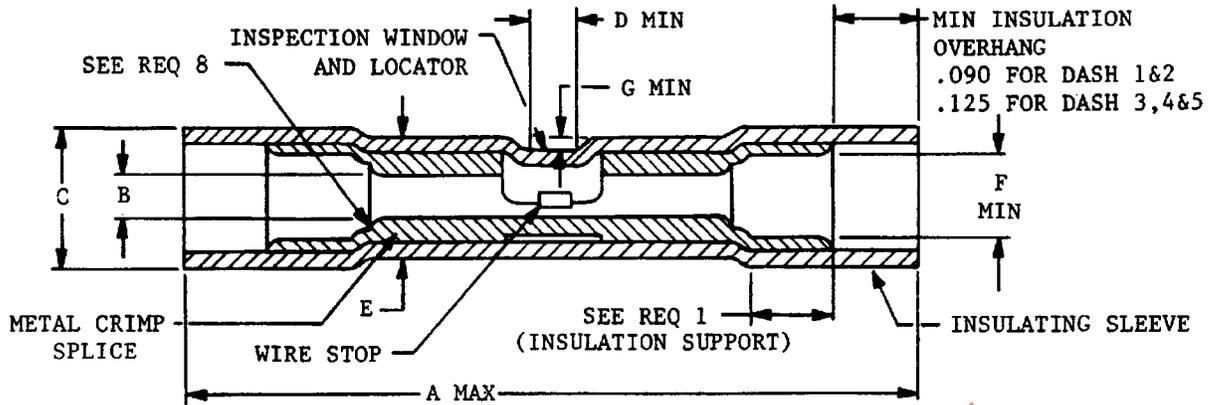


TABLE I

DASH NO.	WIRE RANGE	A MAX.	B	C	D MIN.	E MIN.	F MIN.	G MIN.	INSULATING SLEEVE TRANSPARENT COLOR
-1	26-24	.890	$\frac{.033}{.027}$	$\frac{.160}{.125}$.060	$\frac{.150}{.125}$.070	.025	YELLOW
-2	24-20	1.035	$\frac{.055}{.043}$	$\frac{.170}{.135}$.060	$\frac{.165}{.135}$.100	.030	CLEAR
-3	22-18	1.300	$\frac{.073}{.052}$	$\frac{.220}{.160}$.080	$\frac{.210}{.160}$.110	.050	RED
-4	16-14	1.300	$\frac{.095}{.081}$	$\frac{.260}{.180}$.080	$\frac{.250}{.180}$.140	.050	BLUE
-5	12-10	1.700	$\frac{.135}{.129}$	$\frac{.320}{.250}$.110	$\frac{.300}{.250}$.200	.050	YELLOW

REQUIREMENTS:

1. MIN CABLE INSULATION SUPPORT: .060 FOR DASH 1 AND 2
.094 FOR DASH 3, 4 AND 5
2. MATERIAL: COPPER (SEE ACQUISITION SPECIFICATION) OR COPPER ALLOY. MATERIAL SHALL HAVE ADEQUATE ELECTRICAL CONDUCTIVITY AND SHALL BE SUFFICIENTLY STRONG TO RESIST CRACKING AFTER FORMING AND CRIMPING.
3. INSULATING SLEEVE: SEE ACQUISITION SPECIFICATION.
4. FINISH: METAL, TIN PLATED: SEE ACQUISITION SPECIFICATION.
5. DIMENSION B TO BE DETERMINED AS THE AVERAGE OF TWO DIAMETERS MEASURED AT RIGHT ANGLES.
6. THE INSPECTION WINDOW AND LOCATOR SHALL PROVIDE A POSITIVE MEANS OF POSITIONING SPLICE IN THE APPLICABLE CRIMPING TOOL AND PROVIDE VISIBLE INSPECTION OF STRIPPED WIRE ENDS.
7. CRIMPING TOOLS: CRIMPING TOOLS FOR THE MIL-T-7928/5 SPLICES SHALL BE AS SPECIFIED BELOW.

AS7928/5

SPLICE PN	TOOL	DIE
M7928/5-1	M22520/5-01	and M22520/5-101 or
M7928/5-2	M22520/10-01	and M22520/10-102
M7928/5-3	M22520/5-01	and M22520/5-100 or
M7928/5-4	M22520/10-01	and M22520/10-101
M7928/5-5	M22520/5-01	and M22520/5-100 or
	M22520/10-01	and M22520/10-100

8. INSULATION SUPPORT AND WIRE BARREL MAY BE MULTIPLE PIECE CONSTRUCTION. CONTOUR MAY VARY FROM THAT SHOWN, WITHIN SPECIFIED DIMENSIONS, BUT WIRE LEAD-IN TO WIRE BARREL SHALL BE PROVIDED.
9. QUALIFICATION: FOR QUALIFICATION, SPLICES SHALL BE TESTED WITH ANYONE OF THE FOLLOWING WIRES: MIL-W-22759/1, 9 OR 11 OR MIL-W-81381/7.
10. PART NUMBER: CONSISTS OF THE LETTER "M", THE BASIC NUMBER OF THIS SPECIFICATION SHEET, AND A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: M7928/5-1 SPLICE FOR 26-24 WIRE RANGE.
11. MIL-T-7928/5, UPON ISSUANCE OF A QPL FOR MIL-T-7928/5 SUPERSEDES MIL-T-7928/3 FOR PROCUREMENT AND NEW DESIGN. EXISTING STOCK OF M7928/3-2, -3 AND -4 ARE INTERCHANGEABLE WITH M7928/5-3, -4 AND -5 AND MAY BE USED UNTIL EXHAUSTED. EXISTING STOCK OF M7928/3-1 SHOULD BE SCRAPPED SINCE NO QPL HAS BEEN ESTABLISHED. AS REPLACEMENT, USE THE FOLLOWING EQUIVALENT DASH NUMBERS.

M7928/5	M7928/3
-1	-1
-2	None
-3	-2
-4	-3
-5	-4

12. FLATTENING OF INSULATION SLEEVE TO FORM LOCATOR MAY CAUSE THE SLEEVE TO EXCEED THE E DIMENSION BY .050 MAX IN THE LOCATOR AREA FOR THE -1 THROUGH -4 AND .060 FOR THE -5.

AS7928/5

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS (TO THE NEAREST .01mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4mm.

INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
.025	0.64	.070	1.78	.129	3.28	.220	5.59
.027	0.69	.073	1.85	.135	3.43	.250	6.35
.030	0.76	.080	2.03	.139	3.53	.260	6.60
.033	0.84	.081	2.06	.140	3.56	.300	7.62
.043	1.09	.090	2.29	.150	3.81	.320	8.13
.050	1.27	.094	2.39	.160	4.06	.860	21.84
.052	1.32	.095	2.41	.170	4.32	1.035	26.29
.055	1.40	.100	2.54	.180	4.57	1.300	33.02
.060	1.52	.110	2.79	.200	5.08	1.700	43.18
.062	1.57	.125	3.18	.210	5.33		

SAENORM.COM : Click to view the full PDF of as7928_5

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-T-7928/5B, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-T-7928/5B, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as7928-5

AS7928/5

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 1999-04

PREPARED BY SAE SUBCOMMITTEE AE-8C2

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, SPLICE, ELECTRIC, (PERMANENT, TYPE II, CLASS 1) FOR 105°C TOTAL CONDUCTOR TEMPERATURE

AS7928/5
SHEET 1 OF 4

AS7928/5

THE COMPLETE REQUIREMENTS FOR PROCURING THE SPLICE DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-T-7928. MIL-T-7928/5 IS NOT FOR NAVY USE. FOR NAVY USE, USE MIL-S-81824 SPLICE.

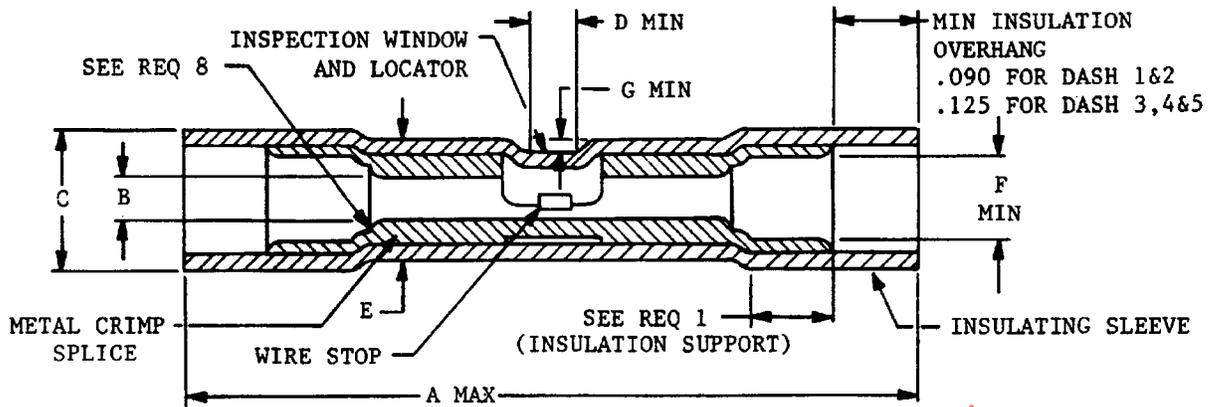


TABLE I

DASH NO.	WIRE RANGE	A MAX.	B	C	D MIN.	E MIN.	F MIN.	G MIN.	INSULATING SLEEVE TRANSPARENT COLOR
-1	26-24	.890	$\frac{.033}{.027}$	$\frac{.160}{.125}$.060	$\frac{.150}{.125}$.070	.025	YELLOW
-2	24-20	1.035	$\frac{.055}{.043}$	$\frac{.170}{.135}$.060	$\frac{.165}{.135}$.100	.030	CLEAR
-3	22-18	1.300	$\frac{.073}{.052}$	$\frac{.220}{.160}$.080	$\frac{.210}{.160}$.110	.050	RED
-4	16-14	1.300	$\frac{.095}{.081}$	$\frac{.260}{.180}$.080	$\frac{.250}{.180}$.140	.050	BLUE
-5	12-10	1.700	$\frac{.135}{.129}$	$\frac{.320}{.250}$.110	$\frac{.300}{.250}$.200	.050	YELLOW

REQUIREMENTS:

1. MIN CABLE INSULATION SUPPORT: .060 FOR DASH 1 AND 2
.094 FOR DASH 3, 4 AND 5
2. MATERIAL: COPPER (SEE ACQUISITION SPECIFICATION) OR COPPER ALLOY. MATERIAL SHALL HAVE ADEQUATE ELECTRICAL CONDUCTIVITY AND SHALL BE SUFFICIENTLY STRONG TO RESIST CRACKING AFTER FORMING AND CRIMPING.
3. INSULATING SLEEVE: SEE ACQUISITION SPECIFICATION.
4. FINISH: METAL, TIN PLATED: SEE ACQUISITION SPECIFICATION.
5. DIMENSION B TO BE DETERMINED AS THE AVERAGE OF TWO DIAMETERS MEASURED AT RIGHT ANGLES.
6. THE INSPECTION WINDOW AND LOCATOR SHALL PROVIDE A POSITIVE MEANS OF POSITIONING SPLICE IN THE APPLICABLE CRIMPING TOOL AND PROVIDE VISIBLE INSPECTION OF STRIPPED WIRE ENDS.
7. CRIMPING TOOLS: CRIMPING TOOLS FOR THE MIL-T-7928/5 SPLICES SHALL BE AS SPECIFIED BELOW.