

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
E

AS85421™/5

FEDERAL SUPPLY CLASS
4730

RATIONALE

GRAPHICS REDRAWN. CORRECTED DIMENSIONAL TYPO OF FLAT DIM E FOR 040404 TO COINCIDE WITH SAME DIMENSION OF OTHER STDS. REMOVED VAD FROM PROCUREMENT SPECIFICATION NOTE. (VAD'S ARE ONLY APPLICABLE FOR HOSES.) OPTIONAL SAFETY WIRE HOLES ADDED.


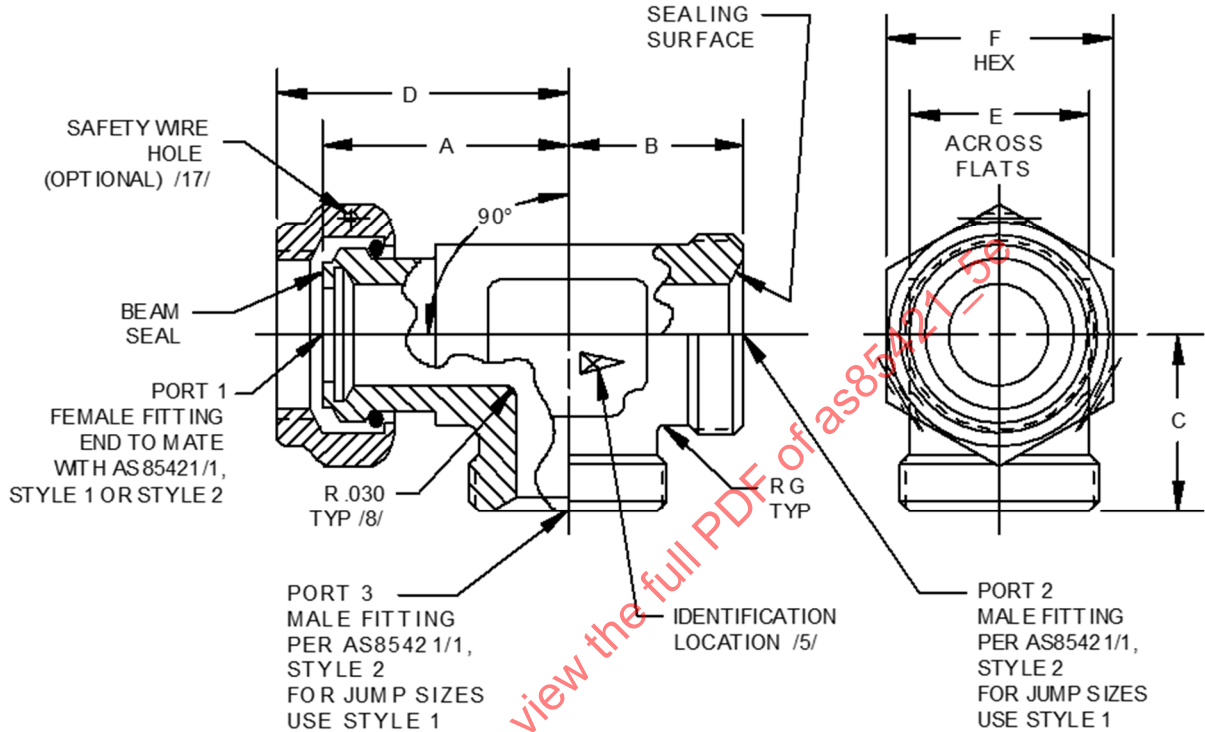


FIGURE 1

For more information on this standard, visit

<https://www.sae.org/standards/content/AS85421/5E/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: AS85421 /4/



AEROSPACE STANDARD

FITTING, TEE, REDUCER AND NON-REDUCER,
BEAM SEAL, 3000/4000 PSI, MALE ON RUN AND
BRANCH, SWIVEL NUT ON RUN

AS85421™/5
SHEET 1 OF 3

REV.
E

Copyright © 2024 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2002-01 REAFFIRMED 2015-04 REVISED 2024-10

TABLE 1 - DIMENSIONS A TO G

AS85421/5			A	B	C	D REF	E	F		G MIN	MASS LB/EA MAX	
PORT #1 SIZE CODE /16/	PORT #2 SIZE CODE /16/	PORT #3 SIZE CODE /16/						MIN	MAX		TI	CRES
04	04	04	.808	.684	.684	1.014	.375	.558	.565	.042	.058	.102
04	06	06	.808	.704	.704	1.014	.500	.558	.565	.042	.056	.098
06	04	04	.945	.684	.684	1.178	.500	.684	.692	.042	.067	.117
06	04	06	.945	.684	.704	1.178	.500	.684	.692	.042	.066	.116
06	08	04	.945	.824	.684	1.178	.562	.684	.692	.042	.085	.149
06	06	06	.945	.704	.704	1.178	.500	.684	.692	.042	.066	.116
08	06	08	1.045	.811	.824	1.294	.562	.871	.878	.070	.105	.184
08	08	08	1.045	.824	.824	1.294	.562	.871	.878	.070	.106	.186
10	06	06	1.178	.878	.878	1.485	.688	.996	1.003	.070	.142	.248

NOTES:

1/ MATERIAL:

- a. CODE LETTER P: TYPE 17-4PH CORROSION-RESISTANT STEEL PER AMS5643.
- b. CODE LETTER T: TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS4928 OR AMS4965.
- c. CODE LETTER V: TYPE 15-5PH, CORROSION-RESISTANT STEEL PER AMS5659.

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER P: CONDITION H1075 PER AMS2759/3.
- b. MATERIAL CODE LETTER T: NONE.
- c. MATERIAL CODE LETTER V: AGE TO CONDITION H 1075 PER AMS-H-6875 OR AMS2759/3.

3. FINISH:

- a. MATERIAL CODE LETTER P: PASSIVATE PER AMS2700, TYPE 2 OR TYPE 8.
- b. MATERIAL CODE LETTER T: NONE.
- c. MATERIAL CODE LETTER V: PASSIVATE PER AMS2700, TYPE 2 OR TYPE 8.

/4/ PROCUREMENT SPECIFICATION: AS85421, EXCEPT AS SPECIFIED IN THIS STANDARD. PRODUCT MANUFACTURED TO THIS STANDARD SHALL MEET THE REQUIREMENTS SPECIFIED HEREIN AND THE PROCUREMENT SPECIFICATION. ORIGINAL COMPONENT MANUFACTURERS (OCM) SHALL BE LISTED IN THE PRI QUALIFIED PRODUCTS LIST (QPL) PRI-QPL-AS85421 FOR THIS STANDARD. SEE www.eAuditNet.com FOR CURRENT QPL ONLINE.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D, OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZES 06 AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS" AND MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION WHEN MADE FROM FORGING.
- b. FOR SIZES 08 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER AND MATERIAL CODE LETTER, AND FORGING MANUFACTURER'S IDENTIFICATION WHEN MADE FROM FORGING.

6. INVENTORIED PARTS CONFORMING TO THE PREVIOUS LETTER CHANGE MAY BE USED TO DEPLETION.

7. INTENDED USE: THIS PART IS DESIGNED FOR USE IN SYSTEM WITH MAXIMUM OPERATING PRESSURES AS FOLLOWS:

- a. CORROSION-RESISTANT STEEL AT 3000 PSI.
- b. TITANIUM ALLOY AT 4000 PSI.

/8/ .030 MIN RADIUS UNLESS QUALIFICATION OF SPECIAL PROCESS WITH SMALLER RADIUS, APPLICABLE FOR TITANIUM ALLOY PARTS ONLY.

	AEROSPACE STANDARD		AS85421™/5 SHEET 2 OF 3	REV. E
	FITTING, TEE, REDUCER AND NON-REDUCER, BEAM SEAL, 3000/4000 PSI, MALE ON RUN AND BRANCH, SWIVEL NUT ON RUN			