

SPHERICAL ROD ENDS

Foreword—This document has *also changed* to comply with the new SAE Technical Standards Board format.

1. **Scope**—This SAE Standard covers the general and dimensional data for industrial quality spherical rod ends commonly used on control linkages in automotive, marine, construction, and industrial equipment applications.

The rod ends described are available from several manufacturers within the range of the interchangeable specifications. The sliding contact spherical self-aligning bearing members (ball and socket) are available in a variety of materials in types shown. The load capacities and wear capabilities vary considerably with the design and fabrication. It is suggested that the manufacturers be consulted for recommendations for the type and design appropriate to particular applications.

2. References

- 2.1 **Applicable Publications**—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated the latest revision of SAE publications shall apply.

- 2.1.1 SAE PUBLICATION—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J475—Screw Threads (ANSI/B 1.1-1974)

- 2.1.2 ASTM PUBLICATION—Available from ASTM, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM B 117—Method of Salt Spray (Fog) Testing

- 2.2 **Related Publication**—The following publication is provided for information purposes only and is not a required part of this document.

- 2.2.1 ANSI PUBLICATION—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI B 18.2.1-1972—Square and Hex Bolts and Screws—Inch Series

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243
TO PLACE A DOCUMENT ORDER: (724) 776-4970 FAX: (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

3. General Specification

3.1 Sizes—Spherical rod end sizes are normally specified by a number indicating the ball bore size in sixteenths of an inch (size 5 = 5/16 bore). The housing threads (external or internal) used for mounting, as well as the stud thread if required, are equal in size to the nominal ball bore. Sizes larger than those listed are available in both standard and special configurations.

3.2 Threads—Unified Standard fine thread series (UNF) Class 2A external threads and Class 2B internal threads shall apply to plain finish (unplated) parts. For externally threaded components with additive finish, the maximum diameters of Class 2A may be exceeded by the amount of the allowance: that is, the basic diameters (Class 2A maximum diameters plus the allowance) apply to an externally threaded part after plating. For internally threaded components with additive finish, the Class 2B diameters apply after plating. See SAE J475 (ANSI B1.1-1974).

Housing threads, left or right hand, may be specified as required. Standard studs are threaded right hand.

External and internal threads must be chamfered to insure a clean start according to good industrial practice. Roll formed internal and external threads are preferred.

3.3 Material—Spherical rod end housing members are normally made from low carbon steel turned, forged, headed, or press-stamped blanks.

Race and ball materials vary according to manufacturer's preference for bearing materials.

For special applications, spherical rod ends can be produced from alloy steel, corrosion resistant steel, brass, bronze or other materials. The charted combinations illustrate the preferred materials in each category available as standard.

Spherical rod ends are available with ball and race material options listed below:

Studs (Figure 6) which may be secured in the bore of any of the ball variations are normally made from turned low carbon steel or headed blanks. Studs with greater strength to resist bending are also available as standard, employing high tensile bar stock or heat treatment during fabrication.

Ball studs which combine ball and stud as a single part are mild steel case hardened.

3.4 Angle of Misalignment—If a spherical rod end is mounted between the legs of a fork or clevis, the total misalignment angle will be limited by the diameter of the housing head as it contacts the legs. This angle varies from 18 to 34 deg in race type spherical rod ends and from 12 to 30 deg in raceless construction. Specific information for a given size and type should be requested from the manufacturer if this is a critical element of the application. See illustration, Figure 1A.

If a spherical rod end is mounted on a shouldered shaft or with washers having a diameter equal to ball dimension "O", the shaft cone angle will vary from 25 to 34 deg. See illustration, Figure 1B.

The use of a stud for mounting increases the limit of total misalignment to a minimum of 50 deg. See illustration, Figure 1C.

3.5 Finishes—Unless otherwise specified, low carbon steel housings, races, and studs shall be furnished with cadmium or zinc protective finish and shall meet the requirements of 32 h Salt Spray Fog Testing in accordance with ASTM B 117. At manufacturer's option, a subsequent chromate treatment may be used. Black oxide treatment for studs may also be employed.

Hardened steel races shall be black oxide treated and oiled. Nonsintered balls and ball studs shall be plated according to manufacturer's preference for corrosion protection appropriate to their use as bearing elements.

TABLE 1—MATERIAL OPTIONS

Rod End	Housing	Race	Ball
Type A (Figure 2)		Sintered Phosphor Bronze	Hardened Sintered Nickel Steel, Oil Impregnated
		Wrought Bronze, Brass	Case Hardened Steel, Tin Nickel Plated
		Mild Steel, Cad Plated	Hardened Sintered Steel
		Hardened Steel	Hardened 52100 Steel, Chrome Plated
Type B (Figure 3)	Mild Steel, Alloy Steel, Stainless Steel, Hardened Steel, Aluminum Bronze, Brass	Nylon Reinforced, Detrin, TFE Lined	Hardened Sintered Steel
			Hardened Sintered Nickel Steel, Oil Impregnated
			Sintered Bronze, Oil Impregnated
Type C (Figure 4)		None	Hardened 52100
			Hardened 52100
Type D (Figure 5)		None	Hardened Sintered Iron, Oil Impregnated
			Case Hardened Steel, Tin Nickel Plated
			Mild Steel-Case Hardened,

- 3.6 Lubrication**—Unless otherwise specified by the user, spherical rod ends shall be supplied with ball sockets suitably lubricated in accordance with manufacturer's practice, including vacuum impregnation of self-lubricating sintered bearing elements.

Grease fittings for supplemental lubrication are provided on request for most types. Standard location is shown. Special locations at 12 o'clock and 3 o'clock positions are also available.

- 3.7 Workmanship**—Industrial quality spherical rod ends must be free from burrs, loose scale, sharp edges, and any other defects.

- 3.8 Ball Bore Chamfer**—Ball bores are chamfered at both faces to break the edge 0.005 in (0.13 mm) or up to a maximum of 0.03 in (0.8 mm) according to manufacturer's preference and method of fabrication. The user is cautioned against seating bolt heads against the ball face during mounting, because bolt fillets under the head may distort or crack the ball. This is especially true of hex bolts and screws meeting ANSI B 18.2.1-1972 specifications. The use of a washer or other suitable alternate is recommended.

Rod End Size	Min A	Min B
3	10°	34°
4	14°	34°
5	12°	28°
6	10°	30°
7	14°	32°
8	10°	32°
10	14°	30°
12	14°	25°

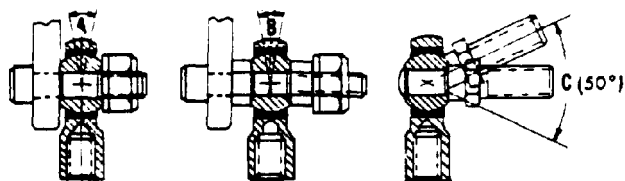


FIGURE 1—A-HOUSING STRIKES YOKE OR LEVER; B-WASHER OR SHOULDERED SHAFT WITH DIA "O" STRIKES RACE ID; C-STUD STRIKES RACE ID

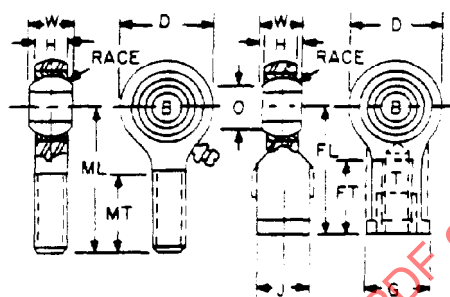


FIGURE 2—TYPE A METALLIC RACE

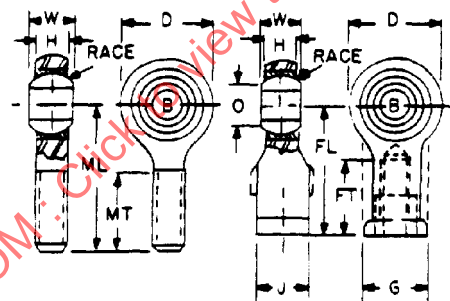


FIGURE 3—TYPE B MOLDED RACE

TABLE 2—DIMENSIONS FOR TYPE A ROD ENDS

Rod End Size	B		D		G		H		J		T	W		FL		FT		ML		MT		Ball Dia Ref		O	
	+0.0025 −0.0005	+0.064 −0.013	Max.		Ref		Ref		±0.015	±0.38	Nominal Thread Size	±0.005	±0.13	+0.06 −0.03	+1.5 −0.8	±0.06	±1.5	+0.06 −0.03	+1.5 −0.8	±0.06	±1.5			Ref	
	in	mm	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
3	0.1900	4.826	0.76	19.3	0.41	10.4	0.25	6.4	0.312	7.92	10–32	0.312	7.92	1.06	26.9	0.50	12.7	1.25	31.8	0.69	17.5	0.44	11.2	0.31	7.9
4	0.2500	6.350	0.89	22.6	0.47	11.9	0.28	7.1	0.375	9.52	1/4–28	0.375	9.52	1.31	33.3	0.69	17.5	1.56	39.6	0.94	23.9	0.51	13.0	0.35	8.9
5	0.3125	7.938	1.01	25.7	0.50	12.7	0.34	8.6	0.438	11.12	5/16–24	0.438	11.12	1.38	35.1	0.69	17.5	1.88	47.8	1.19	30.3	0.62	15.7	0.45	11.4
6	0.3750	9.525	1.11	28.2	0.69	17.5	0.41	10.4	0.562	14.27	3/8–24	0.500	12.70	1.62	41.1	0.88	22.4	1.94	49.3	1.19	30.3	0.72	18.3	0.52	13.2
7	0.4375	11.112	1.20	30.5	0.75	19.0	0.44	11.2	0.625	15.88	7/16–20	0.562	14.27	1.81	46.0	1.00	25.4	2.12	53.8	1.32	33.6	0.81	20.6	0.59	15.0
8	0.5000	12.700	1.39	35.3	0.88	22.4	0.50	12.7	0.750	19.05	1/2–20	0.625	15.88	2.12	53.8	1.13	28.7	2.44	62.0	1.44	36.6	0.94	23.9	0.70	17.8
10	0.6250	15.875	1.57	39.9	1.00	25.4	0.56	14.2	0.875	22.22	5/8–18	0.750	19.05	2.50	63.5	1.44	36.6	2.62	66.5	1.56	39.6	1.12	28.4	0.81	20.6
12	0.7500	19.050	1.82	46.2	1.12	28.4	0.69	17.5	1.000	25.40	3/4–16	0.875	22.22	2.88	73.2	1.69	42.9	2.88	73.2	1.69	42.9	1.32	33.5	1.02	25.9

TABLE 3—DIMENSIONS FOR TYPE B ROD ENDS

Rod End Size	B		D		G		H		J		T	W		FL		FT		ML		MT		Ball Dia Ref		O	
	+0.0025 −0.0005	+0.064 −0.013	Max		Ref		Ref		±0.015	±0.38	Nominal Thread Size	±0.005	±0.13	+0.06 −0.03	+1.5 −0.8	±0.06	±1.5	+0.06 −0.03	+1.5 −0.8	±0.06	±1.5			Ref	
	in	mm	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
3	0.1900	4.826	0.76	19.3	0.41	10.4	0.25	6.4	0.312	7.92	10–32	0.312	7.92	1.06	26.9	0.50	12.7	1.25	31.8	0.69	17.5	0.44	11.2	0.31	7.9
4	0.2500	6.350	0.89	22.6	0.47	11.9	0.28	7.1	0.375	9.52	1/4–28	0.375	9.52	1.31	33.3	0.69	17.5	1.56	39.6	0.94	23.9	0.51	13.0	0.35	8.9
5	0.3125	7.938	1.01	25.7	0.50	12.7	0.34	8.6	0.438	11.12	5/16–24	0.438	11.12	1.38	35.1	0.69	17.5	1.88	47.8	1.19	30.3	0.62	15.7	0.45	11.4
6	0.3750	9.525	1.11	28.2	0.69	17.5	0.41	10.4	0.562	14.27	3/8–24	0.500	12.70	1.62	41.1	0.88	22.4	1.94	49.3	1.19	30.3	0.72	18.3	0.52	13.2
7	0.4375	11.112	1.20	30.5	0.75	19.0	0.44	11.2	0.625	15.88	7/16–20	0.562	14.27	1.81	46.0	1.00	25.4	2.12	53.8	1.32	33.6	0.81	20.6	0.59	15.0
8	0.5000	12.700	1.39	35.3	0.88	22.4	0.50	12.7	0.750	19.05	1/2–20	0.625	15.88	2.12	53.8	1.13	28.7	2.44	62.0	1.44	36.6	0.94	23.9	0.70	17.8
10	0.6250	15.875	1.51	38.4	1.00	25.4	0.56	14.2	0.875	22.22	5/8–18	0.750	19.05	2.50	63.5	1.44	36.6	2.62	66.5	1.56	39.6	1.12	28.4	0.81	20.6

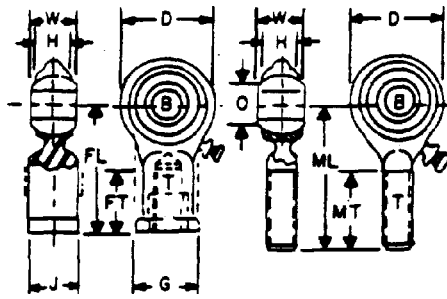


FIGURE 4—TYPE C RACELESS

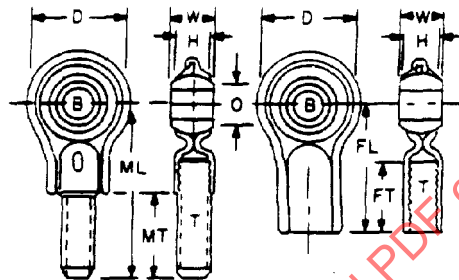


FIGURE 5—TYPE D RACELESS STAMPED HOUSING

TABLE 4—DIMENSIONS FOR TYPE A ROD ENDS

Rod End Size	B		D		G		H		J		T	W		FL		FT		ML		MT		Ball Dia Ref		O	
	+0.0025 -0.0005	+0.064 -0.013	Max		Ref		Ref		±0.015	±0.38	Nominal Thread Size	±0.005	±0.13	+0.06 -0.03	+1.5 -0.8	±0.06	±1.5	+0.06 -0.03	+1.5 -0.8	+0.06 -0.03	+1.5 -0.8	Ref		Ref	
	in	mm	in	mm	in	mm	in	mm	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
3	0.1900	4.826	0.62	15.7	0.41	10.4	0.25	6.4	0.312	7.92	10-32	0.312	7.92	1.06	26.9	0.44	11.1	1.25	31.8	0.69	17.5	0.45	11.4	0.35	8.9
4	0.2500	6.350	0.76	19.3	0.47	11.9	0.28	7.1	0.375	9.52	1/4-28	0.375	9.52	1.31	33.3	0.62	15.7	1.56	39.6	0.94	23.9	0.53	13.5	0.42	10.7
5	0.3125	7.938	0.88	22.4	0.50	12.7	0.34	8.6	0.438	11.12	5/16-24	0.438	11.12	1.38	35.1	0.62	15.7	1.88	47.8	1.19	30.3	0.64	16.3	0.49	12.4
6	0.3750	9.525	1.01	25.7	0.69	17.5	0.41	10.4	0.562	14.27	3/8-24	0.500	12.70	1.62	41.1	0.75	19.0	1.94	49.3	1.19	30.3	0.72	18.3	0.51	13.0
7	0.4375	11.112	1.12	28.4	0.75	19.0	0.44	11.2	0.625	15.88	7/16-20	0.562	14.27	1.81	46.0	0.88	22.2	2.12	53.8	1.32	33.6	0.81	20.6	0.58	14.7
8	0.5000	12.700	1.31	33.3	0.88	22.4	0.50	12.7	0.750	19.05	1/2-20	0.625	15.88	2.12	53.8	1.00	25.4	2.44	62.0	1.44	36.6	0.96	24.4	0.79	20.1
10	0.6250	15.875	1.50	38.1	1.00	25.4	0.56	14.2	0.875	22.22	5/8-18	0.750	19.05	2.50	63.5	1.32	33.3	2.62	66.5	1.56	39.6	1.16	29.5	0.92	23.4
12	0.7500	19.050	1.75	44.4	1.12	28.4	0.69	17.5	1.000	25.40	3/4-16	0.875	22.22	2.88	73.2	1.50	38.1	2.88	73.2	1.69	42.9	1.34	34.0	1.06	26.9

TABLE 5—DIMENSIONS FOR TYPE A ROD ENDS

Rod End Size	B		D		H		T	W		FL		FT		ML		MT		Ball Dia Ref		O	
	+0.0025 -0.0005	+0.064 -0.01	Max		Ref		Nominal Thread Size	±0.005	±0.13	+0.06	±1.5	±0.06	±1.5	±0.09	±2.3	±0.06	±1.5	Ref		Ref	
	in	mm	in	mm	in	mm				in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
3	0.1900	4.826	0.78	18.8	0.25	6.4	10-32	0.312	7.92	1.06	26.9	0.50	12.7	1.50	38.1	0.69	17.5	0.44	11.2	0.31	7.9
4	0.2500	6.350	0.88	22.4	0.29	7.1	1/4-28	0.375	9.52	1.31	33.3	0.69	17.5	1.86	47.2	0.94	23.9	0.52	13.2	0.35	8.9
5	0.3125	7.938	1.05	26.7	0.31	7.9	5/16-24	0.438	11.12	1.38	35.1	0.69	17.5	2.25	57.2	1.19	30.3	0.62	15.7	0.45	11.4
6	0.3750	9.525	1.16	29.5	0.41	10.4	3/8-24	0.500	12.70	1.62	41.1	0.88	22.4	2.39	60.7	1.19	30.3	0.72	18.3	0.52	13.2
7	0.4375	11.112	1.37	34.8	0.44	11.2	7/16-20	0.562	14.27	1.91	48.5	1.00	25.4	2.74	69.6	1.32	33.6	0.81	20.6	0.59	15.0
8	0.5000	12.700	1.51	38.4	0.50	12.7	1/2-20	0.625	15.88	2.12	53.8	1.13	28.7	3.04	77.2	1.44	36.6	0.94	23.9	0.70	17.8