

SURFACE VEHICLE RECOMMENDED PRACTICE

SAE J1948

ISSUED
MAR89

Issued

1989-03

Submitted for recognition as an American National Standard

CAB SLEEPER OCCUPANT RESTRAINT SYSTEM TEST

Foreword—This Document has not changed other than to put it into the new SAE Technical Standards Board Format.

1. Scope—This recommended practice provides a standardized test procedure for heavy-duty truck sleeper berth restraints to determine whether they meet the FMCSR 393.76 requirements.

1.1 Purpose—This document was developed to determine if a truck sleeper berth restraint is adequate to sustain a predetermined maximum horizontal load such as required by FMCSR regulation 393.76(h).

2. References

2.1 Applicable Publication—The following publication forms a part of the specification to the extent specified herein.

2.1.1 FMCSR PUBLICATION—

FMCSR 393.76 (h)

3. Definition—The restraint system is the apparatus or structure designed to prevent ejection of an occupant from the sleeper berth during sudden vehicle deceleration. The system may be removable to allow entrance and egress to the berth.

4. Facilities—Apparatus and Materials

4.1 Test Materials

4.1.1 The modular vehicle component, or enclosure, containing the sleeper berth.

4.1.2 The occupant restraint system, including all necessary hardware.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243
TO PLACE A DOCUMENT ORDER: (724) 776-4970 FAX: (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

4.2 Test Equipment

- 4.2.1 A means for fastening the enclosure securely to the ground plane in its normal operating position.
- 4.2.2 A body block consisting of a curved plate or cylinder of overall length sufficient to engage the active portions of the restraint system. The plate should be curved with edge radii as shown in Figure 1. If a cylinder is used, it should be about 12 inches in diameter or larger.

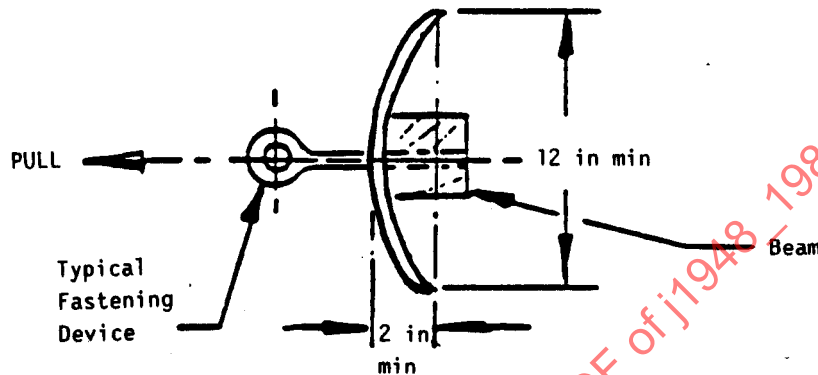


FIGURE 1—END VIEW BODY BLOCK

- 4.2.3 A means of locating one or more fastening devices.
- 4.2.4 A horizontal loading device with minimum capacity of 6000 lb.
- 4.2.5 A means for measuring and recording the load in this device.

5. Procedure

5.1 Load Test

- 5.1.1 Locate and fasten sleeper berth enclosure in its normal position relative to the ground plane.
- 5.1.2 Locate and fasten restraint system.
- 5.1.3 Locate body block against occupant side of restraint system in any axis at any location designated as the restraint area.
- 5.1.4 Fasten body block to loading device.
- 5.1.5 Check and calibrate instrumentation.
- 5.1.6 Apply a force of 6000 lb horizontally -0 to +15 deg in a forward direction at a maximum rate of 300 lb/s.
- 5.1.7 Hold 6000 lb for 10 s.
- 5.1.8 Observe performance.

PREPARED BY THE SAE TRUCK AND BUS CAB OCCUPANT AND ENVIRN. COMMITTEE