

	SURFACE VEHICLE RECOMMENDED PRACTICE	SAE J2475 AUG2008
		Issued 2000-01 Revised 2008-08
		Superseding J2475 MAR2005
Wheel End Assembly and Axle Spindle Interface Dimensions— Truck and Bus		

RATIONALE

The scope of the document did not include the SAE, I80, U, W and L type axle configurations. These axle configurations have been added and are now included in the scope.

The objective of this document is to establish dimensional standardization within the interface areas of the axle spindle, bearing cones, bearing spacer, seal, and wheel hub. This dimensional standardization will assure no interference conditions exist for mating components.

This recommended practice will define and document the dimensions and tolerances necessary to maintain serviceability and interchangeability in the interface areas. There is a need within the industry for a recommended dimensional standard, since without it, improper mating of spacers, spindles and hub may occur.

1. SCOPE

This recommended practice contains dimensions and tolerances for spindles in the interface area. Interfacing components include axle spindle, bearing cones, bearing spacer, seal and wheel hub. This recommended practice is intended for axles commonly used on Class 7 and 8 commercial vehicles. Included are SAE axle configurations FF, FL, I80, L, U, W, R, N and P.

1.1 Purpose

The purpose of this recommended practice is to establish dimensional guidelines to promote a functional standardization of spindle dimensions for wheel end assemblies. Proper hub component dimensions can then be established.

2. REFERENCES

2.1 Related Publications

The following publications are provided for information purposes and are not a required part of this document.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J1842 Disc Wheel Hub/Spoke Wheel and Axle Interface Dimensions—Commercial Vehicles

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2008 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org

SAE WEB ADDRESS:

<http://www.sae.org>

3. DEFINITIONS

A list of basic nomenclature and definitions are shown in 3.1.


3.1 Feature Definition

A – Typical Outboard Bearing Cone (per ABMA)
B – Typical Inboard Bearing Cone (per ABMA)
C – Inboard Bearing Cone Spindle Length
D – Spindle Transition Length
E – Outboard Bearing Cone Spindle Starting Length
F – Outboard Bearing Spindle Diameter
G – Spindle Transition Diameter
H – Inboard Bearing Spindle Diameter
J – Seal Shoulder Length
K – Seal Shoulder Diameter
R₁ – Spindle Transition Fillet Radius
R₂ – Inboard Bearing Spindle Fillet Radius (per ABMA)
R₃ – Seal Shoulder Fillet Radius

4. PROCEDURE


A line of maximum material is established as shown in the figures with dimensions. All dimensions are in millimeters (inches).

SAENORM.COM : Click to view the full PDF of J2475_200808

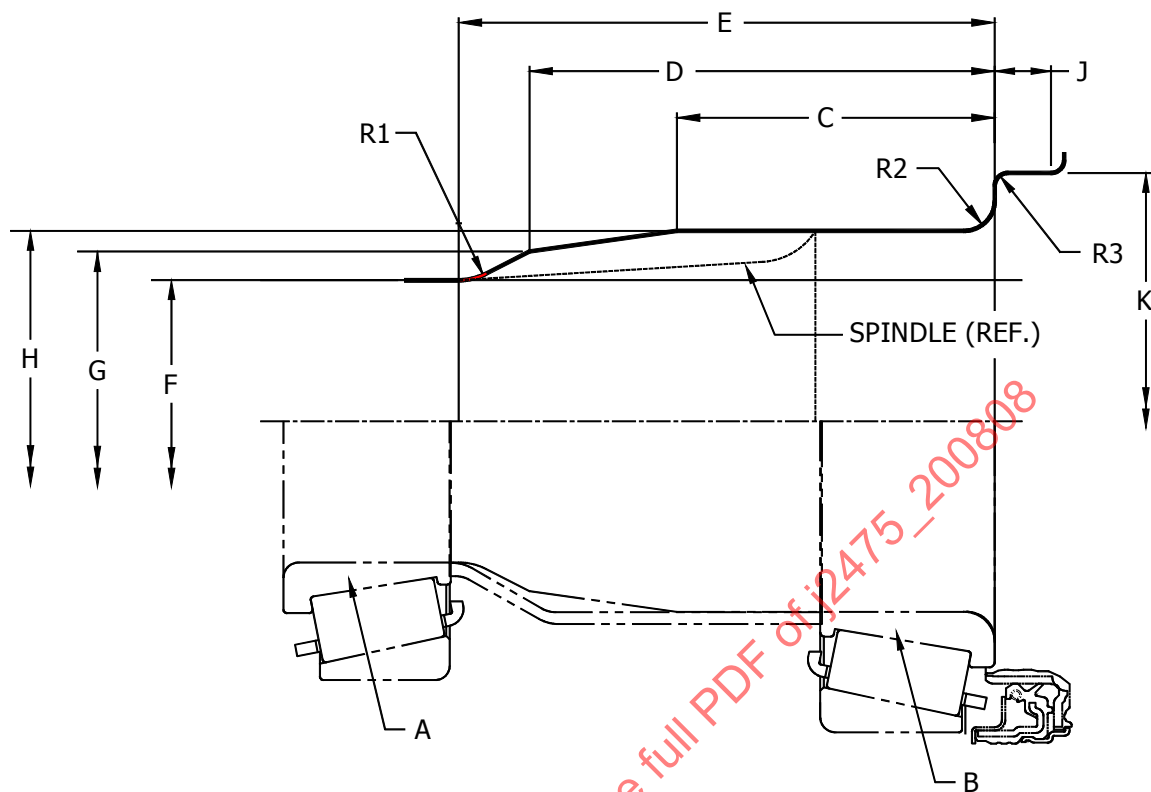

SAE CONFIGURATION	A TYPICAL	B TYPICAL	C MAX	D MAX	E MAX	F MAX	G MAX	H MAX	J MIN	K NOM	R1 MAX	R2 MAX	R3 MAX
N	HM212049	HM218248	72.90 (2.870)	106.68 (4.200)	122.94 (4.840)	66.670 (2.6248)	80.26 (3.16)	89.962 (3.5418)	18.29 (0.720)	117.53 (4.627)	13.46 (0.530)	7.11 (0.280)	6.35 (0.250)
P	HM518445	HM518445	N/A N/A	153.42 (6.040)	N/A N/A	88.887 (3.4995)	N/A N/A	88.887 (3.4995)	15.75 (0.620)	107.95 (4.250)	N/A N/A	6.35 (0.250)	3.05 (0.120)

FIGURE 1 - TRAILER

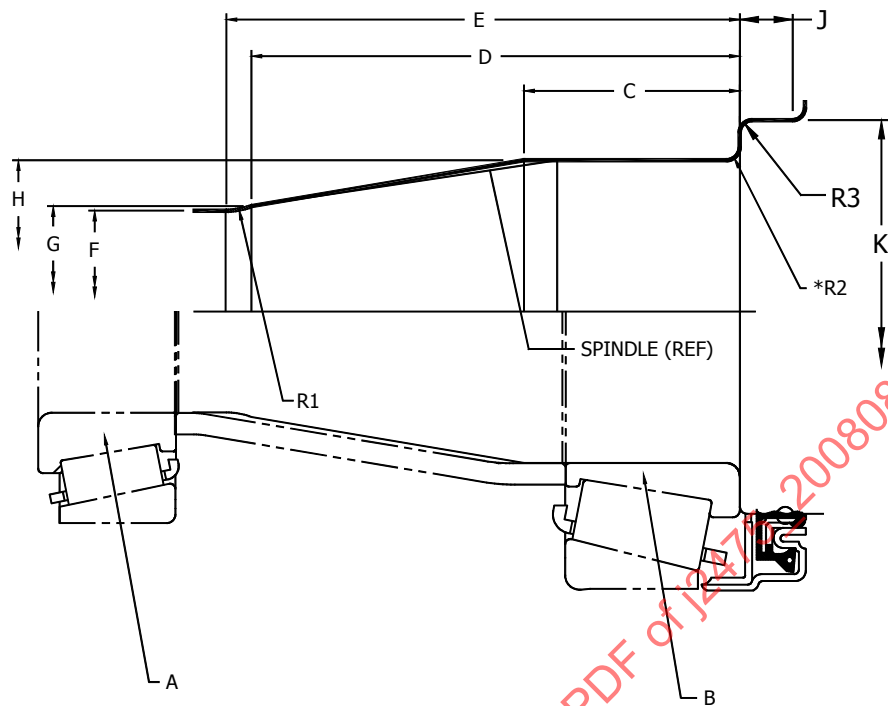

SAE CONFIGURATION	A TYPICAL	B TYPICAL	C MAX	D MAX	E MAX	F MAX	G MAX	H MAX	J MIN	K NOM	R1 MAX	*R2 MAX	R3 MAX
FF	3782	HM212049	45.72 (1.800)	112.52 (4.430)	118.36 (4.660)	44.445 (1.7498)	45.72 (1.800)	66.670 (2.6248)	18.29 (0.720)	88.90 (3.500)	15.75 (0.620)	3.56 (0.140)	3.05 (0.120)
FL	555-S	6461A	62.74 (2.470)	124.46 (4.900)	129.54 (5.100)	57.145 (2.2498)	59.94 (2.360)	76.195 (2.9998)	17.02 (0.670)	111.13 (4.375)	25.40 (1.000)	9.65 (0.380)	3.05 (0.120)
I80	25877	JM207049A	34.54 (1.360)	87.66 (3.451)	95.25 (3.750)	34.920 (1.3748)	40.39 (1.590)	54.981 (2.1646)	17.42 (0.686)	73.03 (2.875)	11.94 (0.470)	6.10 (0.240)	3.05 (0.120)

*R2 = 7.0 (0.275) IF B TYPICAL IS HM212049X

FIGURE 2 - NON-POWERED FRONT