

FEDERAL SUPPLY CLASS
5310

REV. A

AS3478

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions

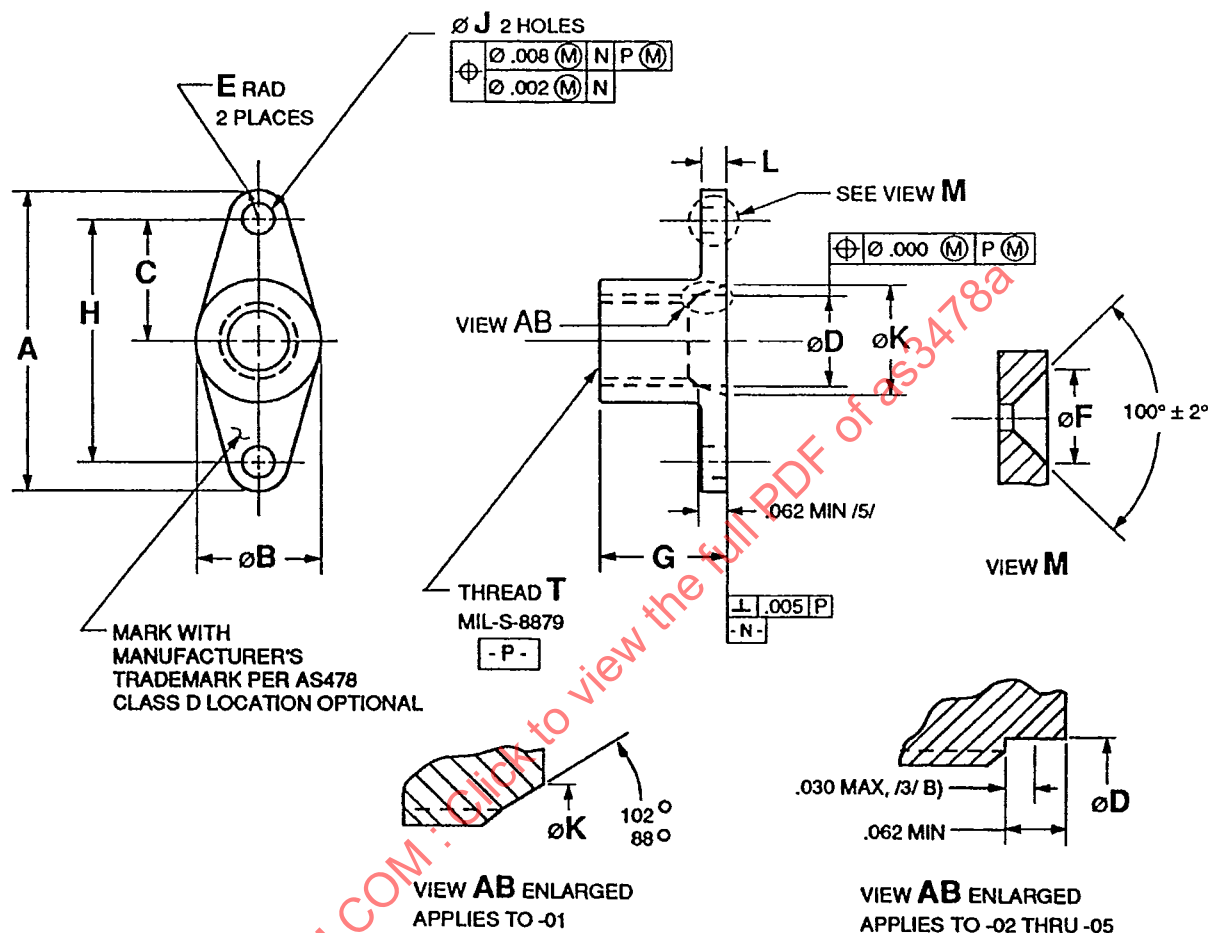


FIGURE 1

THIRD ANGLE PROJECTION

PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive Warrendale PA 15096-0001

AEROSPACE STANDARD

(R) NUT, SELF-LOCKING, PLATE, TWO LUG,
LOW HEIGHT, UNS S66286,
CLASS: 125 KSI/800 °F

AS3478

SHEET 1 OF 3

REV.

A

ISSUED	1991-02	REVISED	1994-11 (A)

AS3478

REV.
A

TABLE 1

PART NUMBER	T THREAD	A MAX	ØB	C ±.005	ØD MIN	E MIN	ØF ±.010	G MAX	H ±.002	ØJ +.005 -.000	ØK MAX	L MAX	AXIAL STRENGTH LBF MIN	APPROX MASS LB/100
AS3478-01	.1380-32UNJC-3B	.948	.239-.265	.344	--	.100	.200	.171	.688	.098	.206	.047	1130	.18
AS3478-02	.1640-32UNJC-3B	.948	.277-.297	.344	.168	.100	.200	.250	.688	.098	--	.047	1720	.28
AS3478-03	.1900-32UNJF-3B	.948	.308-.328	.344	.194	.100	.200	.250	.688	.098	--	.047	2460	.29
AS3478-04	.2500-28UNJF-3B	1.260	.375-.414	.500	.254	.100	.200	.281	1.000	.098	--	.055	4580	.53
AS3478-05	.3125-24UNJF-3B	1.292	.485-.505	.500	.317	.125	.230	.328	1.000	.130	--	.065	7390	.80

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

AEROSPACE STANDARD

(R) NUT, SELF-LOCKING, PLATE, TWO LUG,
LOW HEIGHT, UNS S66286,
CLASS: 125 KSI/800 °F

AS3478

SHEET 2 OF 3

REV.**A**