


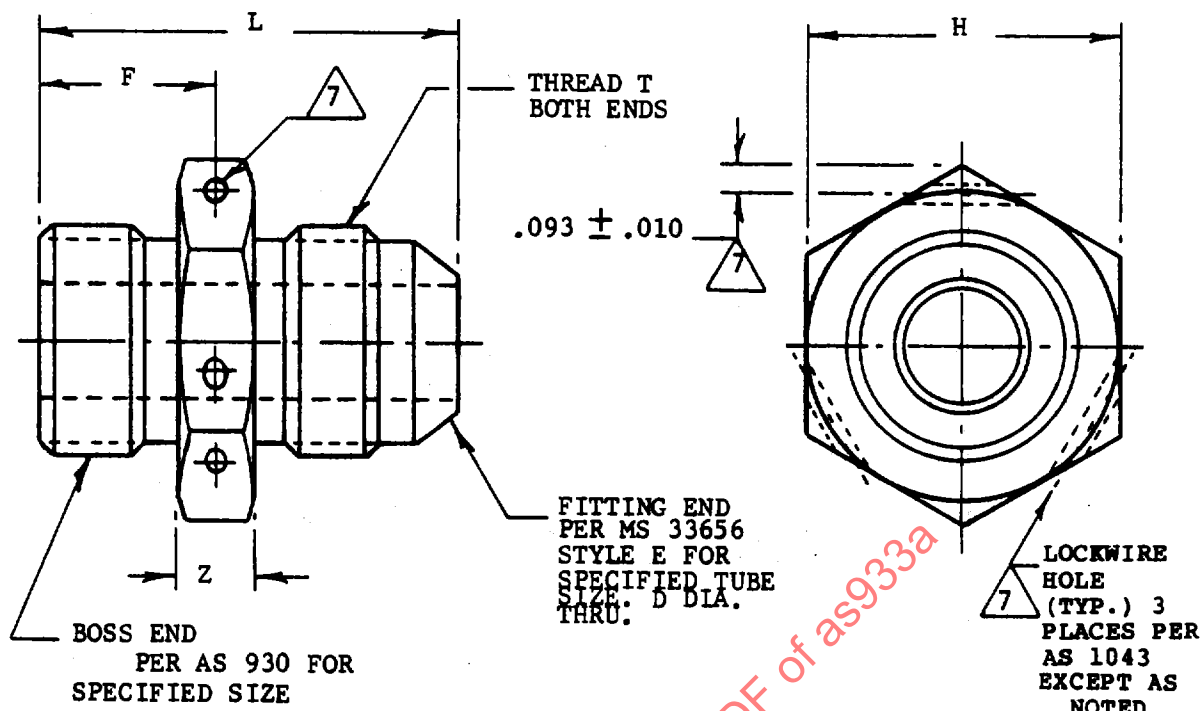

HEX SIZE & HEX CHAMFER PER AS 930

DASH NO.	TUBE O.D.	THREAD T (REF.) MIL-S-8879	L $\pm .015$	H HEX (REF.)	D DIA. (REF.)	F $\pm .010$	Z (REF.)
-02	1/8	.3125-24 UNJF-3A	1.028	.563	.062	.470	.220
-03	3/16	.3750-24 UNJF-3A	1.059	.625	.125	.470	.220
-04	1/4	.4375-20 UNJF-3A	1.185	.688	.172	.518	.235
-05	5/16	.5000-20 UNJF-3A	1.185	.750	.234	.518	.235
-06	3/8	.5625-18 UNJF-3A	1.206	.813	.297	.525	.250
-08	1/2	.7500-16 UNJF-3A	1.347	1.000	.391	.565	.250
-10	5/8	.8750-14 UNJF-3A	1.510	1.125	.484	.596	.312
-12	3/4	1.0625-12 UNJ-3A	1.719	1.375	.609	.667	.375
-16	1	1.3125-12 UNJ-3A	1.766	1.625	.844	.667	.375
-20	1-1/4	1.6250-12 UNJ-3A	1.813	1.875	1.078	.667	.375
-24	1-1/2	1.8750-12 UNJ-3A	1.938	2.125	1.312	.667	.375
-32	2	2.5000-12 UNJ-3A	2.250	2.750	1.781	.698	.437

REAFFIRMED

APRIL 1993

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT: MIL-F-18280

SAE The Engineering Resource For Advancing Mobility

400 Commonwealth Drive
Warrendale, PA 15096

AEROSPACE STANDARD

ADAPTER - FLARED TUBE TO BOSS

AS 933

SHEET 1 OF 2