

AS4667


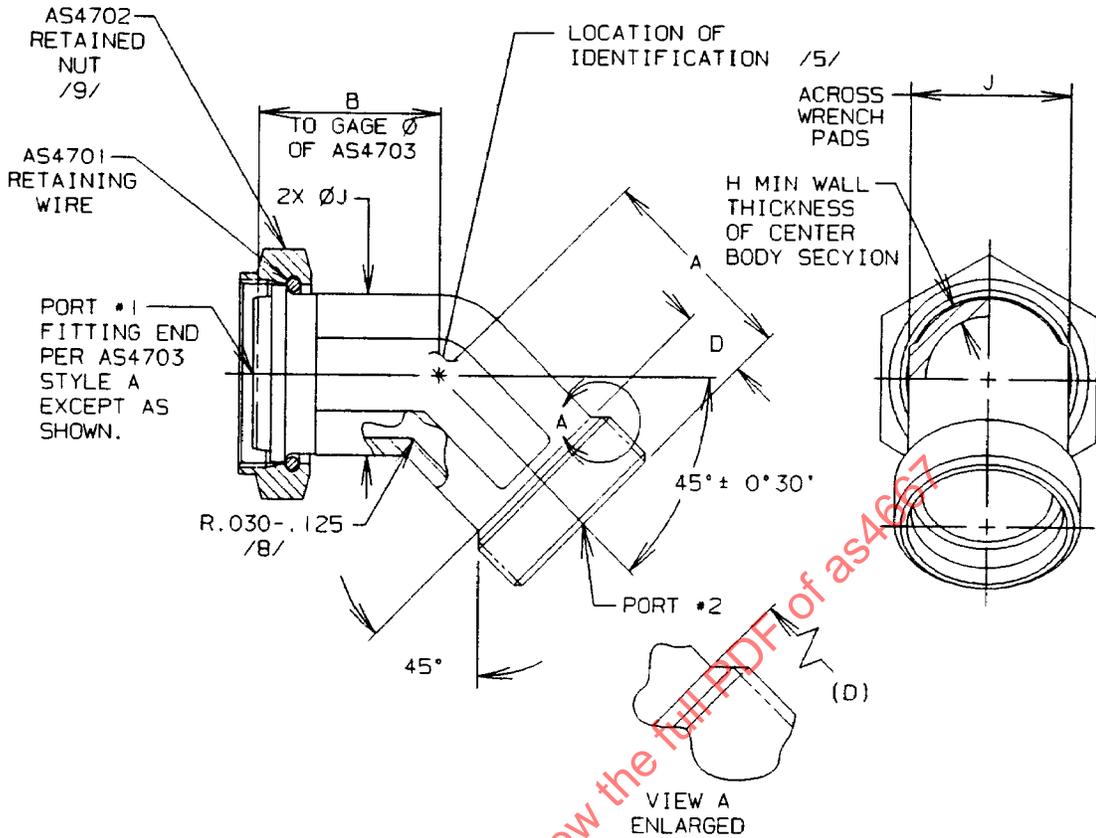



FIGURE 1 - ELBOW ASSEMBLY, 45°

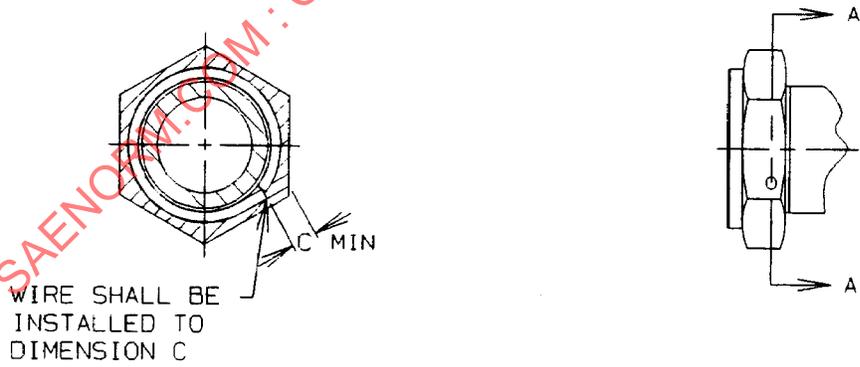

SECTION A-A

FIGURE 2 - INSTALLATION, SWIVEL NUT RETAINING WIRE

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-18280

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

ELBOW ASSEMBLY, 45°, RETAINED NUT,
SHORT FLARELESS

AS4667
SHEET 1 OF 3

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS4667	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879	A	B	C	D	H	J +.005/- .020	LB/EA MAX ALUM	LB/EA MAX CRES	LB/EA MAX TI
/15/ SIZE CODE											
20	1.250	1.5625-12UNJ	1.053	1.055	.155	.517	.124	1.375	.268	.779	.451
24	1.500	1.8125-12UNJ	1.105	1.135	.180	.614	.156	1.688	.381	1.098	.636

AS4667

NOTES:

/1/ MATERIAL:

a. CODE LETTER T:

- (1) BODY: TYPE 6AL-4V TITANIUM ALLOY PER AMS 4928
- (2) NUT: CODE LETTER T OF AS4702 REFERENCE (TYPE 6AL-4V TITANIUM ALLOY)
- (3) WIRE: PER AS4701 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

b. CODE LETTER V:

- (1) BODY: TYPE 15-5PH CORROSION RESISTANT STEEL PER AMS 5659
- (2) NUT: CODE LETTER V OF AS4702 REFERENCE (TYPE 15-5PH CORROSION RESISTANT STEEL)
- (3) WIRE: PER AS4701 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

c. CODE LETTER W:

- (1) BODY: TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS 4141 OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124
- (2) NUT: CODE LETTER W OF AS4702 REFERENCE (TYPE 7075-T73 ALUMINUM ALLOY)
- (3) WIRE: PER AS4701 REFERENCE (CLASS 302 OR 305 CORROSION RESISTANT STEEL)

2. HEAT TREAT:

a. MATERIAL CODE LETTER T:

- (1) BODY, NUT, AND WIRE: NONE

b. MATERIAL CODE LETTER V:

- (1) BODY: HEAT TREAT TO CONDITION H-1075 PER AMS 2759/3
- (2) NUT: MATERIAL CODE LETTER V OF AS4702 REFERENCE (HEAT TREAT TO CONDITION H-1075)
- (3) WIRE: NONE

c. MATERIAL CODE LETTER W:

- (1) BODY, NUT, AND WIRE: NONE

/3/ FINISH:

a. MATERIAL CODE LETTER T:

- (1) BODY: FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486
- (2) NUT: CODE LETTER T OF AS4702 OR AS1790 WITH SUFFIX N REFERENCE (FLUORIDE PHOSPHATE CONVERSION COAT AND COAT WITH DRY LUBRICANT ON ID)
- (3) WIRE: PER AS4701 OR AS1791 REFERENCE (PASSIVATE AND COAT WITH DRY LUBRICANT)

b. MATERIAL CODE LETTER V:

- (1) BODY:
 - (a) V CODE PARTS TO BE PASSIVATED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE PART NUMBER. THE FINISH WILL BE PASSIVATE PER QQ-P-35, TYPE II OR VIII.